

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921069

Luminaire Tested: DFN2DIP-TR4F0-080D070US935-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921069
REPORT IS A COMBINATION OF REPORTS P901952 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-080D070US935-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11821.5 lumens
Efficiency: N/A
Efficacy: 92.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 127.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921069

CATALOG NUMBER: DFN2DIP-TR4F0-080D070US935-RLLONL

Luminous Intensity Polar Plot

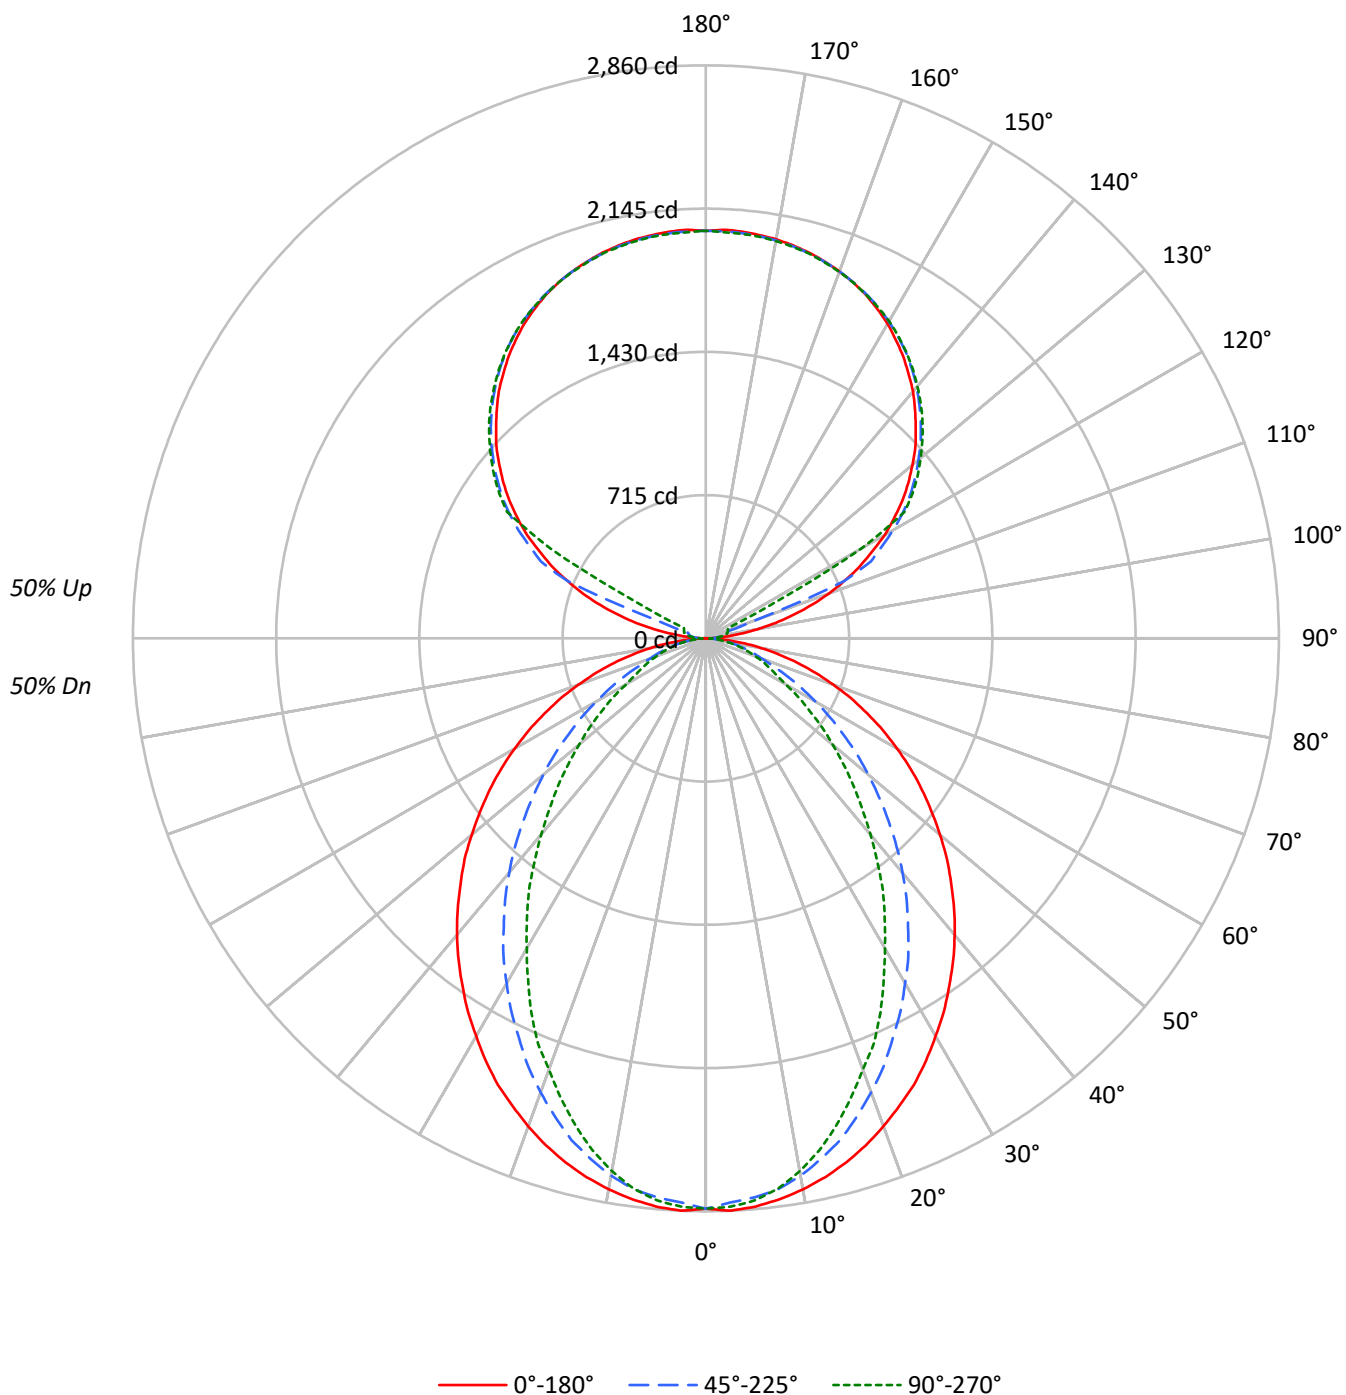

TEST NUMBER: P921069

CATALOG NUMBER: DFN2DIP-TR4F0-080D070US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56
1	98	94	90	87	90	87	84	81	74	71	69	61	60	58	50	49	48
2	90	83	77	72	83	77	71	67	65	61	58	54	52	49	45	43	41
3	82	73	66	60	76	68	62	57	58	53	49	49	45	42	40	38	36
4	75	65	57	52	69	60	54	48	52	47	42	44	40	37	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	33	30	27
6	64	52	44	39	59	49	42	37	42	37	32	36	32	28	30	27	24
7	59	47	40	34	55	44	37	32	38	33	29	33	28	25	27	24	22
8	55	43	36	30	51	40	34	29	35	30	26	30	26	23	25	22	20
9	51	39	32	27	48	37	30	26	32	27	23	28	23	21	23	20	18
10	48	36	29	25	45	34	28	23	30	25	21	26	22	19	22	19	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2262	2262	2262
5°	2265	2226	2240
10°	2243	2182	2167
15°	2212	2110	2054
20°	2171	2010	1916
25°	2129	1899	1782
30°	2073	1785	1613
35°	2018	1662	1464
40°	1962	1535	1293
45°	1897	1394	1139
50°	1830	1251	988
55°	1760	1099	843
60°	1678	940	694
65°	1585	778	624
70°	1472	628	565
75°	1329	553	514
80°	1123	464	445
85°	783	309	334

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1897 cd/sqm

TEST NUMBER: P921069

CATALOG NUMBER: DFN2DIP-TR4F0-080D070US935-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	266.8	2.3
10°-20°	732.4	6.2
20°-30°	1028.3	8.7
30°-40°	1120.9	9.5
40°-50°	1030.3	8.7
50°-60°	809.1	6.8
60°-70°	526.6	4.5
70°-80°	271.1	2.3
80°-90°	72.8	0.6
90°-100°	67.1	0.6
100°-110°	250.0	2.1
110°-120°	663.1	5.6
120°-130°	1099.8	9.3
130°-140°	1168.3	9.9
140°-150°	1085.8	9.2
150°-160°	872.9	7.4
160°-170°	562.5	4.8
170°-180°	193.6	1.6
0°-30°	2027.6	17.2
0°-40°	3148.5	26.6
0°-60°	4987.8	42.2
0°-90°	5858.4	49.6
90°-120°	980.2	8.3
90°-150°	4334.1	36.7
90°-180°	5963.0	50.4
0°-180°	11821.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2847	2847	2847	2847	2847	
5°	2847	2834	2800	2824	2816	270
15°	2708	2679	2592	2543	2517	763
25°	2458	2375	2205	2100	2061	1130
35°	2118	1986	1760	1597	1540	1326
45°	1731	1559	1288	1105	1043	1337
55°	1316	1116	837	683	634	1176
65°	889	680	448	361	353	881
75°	474	294	206	188	186	501
85°	111	57	49	49	49	127
90°	1	18	29	37	40	11
95°	96	47	57	65	63	113
105°	448	492	90	106	112	478
115°	846	871	908	227	121	833
125°	1196	1216	1244	1254	1258	1067
135°	1481	1504	1517	1532	1529	1144
145°	1718	1716	1741	1751	1744	1074
155°	1891	1878	1896	1904	1893	872
165°	1993	1984	1988	1999	1988	563
175°	2038	2028	2031	2041	2027	194
180°	2034	2034	2034	2034	2034	

TEST NUMBER: P921069

CATALOG NUMBER: DFN2DIP-TR4F0-080D070US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2846.8	2846.8	2846.8	2846.8	2846.8
2.5°	2859.6	2846.8	2818.4	2844.3	2839.1
5°	2846.8	2834.0	2800.3	2823.6	2815.9
7.5°	2823.6	2808.2	2772.2	2782.3	2769.4
10°	2792.6	2774.7	2723.3	2715.3	2700.0
12.5°	2754.2	2730.9	2661.2	2645.8	2617.4
15°	2707.7	2679.3	2591.8	2542.9	2517.1
17.5°	2653.5	2612.3	2504.0	2447.5	2406.1
20°	2591.8	2540.1	2411.4	2347.2	2290.3
22.5°	2524.8	2465.5	2316.0	2228.5	2189.9
25°	2457.8	2375.3	2205.3	2099.8	2061.0
27.5°	2378.0	2290.3	2102.2	1981.2	1921.8
30°	2293.0	2194.9	1988.8	1857.6	1787.9
32.5°	2210.4	2091.9	1880.8	1726.1	1661.6
35°	2117.8	1986.3	1759.7	1597.4	1540.5
37.5°	2027.6	1885.8	1646.3	1468.3	1404.1
40°	1932.3	1777.8	1527.7	1344.8	1277.8
42.5°	1834.4	1669.6	1409.3	1218.6	1154.3
45°	1731.3	1558.6	1288.2	1105.1	1043.4
47.5°	1633.5	1450.6	1172.3	989.2	932.6
50°	1525.2	1342.4	1058.9	881.0	827.1
52.5°	1419.4	1226.1	950.6	780.7	731.8
55°	1316.4	1115.5	837.2	682.8	633.9
57.5°	1210.9	1004.8	736.9	592.6	551.3
60°	1102.6	896.6	631.1	499.9	458.7
62.5°	997.1	791.0	541.0	417.4	396.9
65°	888.9	680.0	448.2	360.8	352.8
67.5°	785.8	577.0	360.8	316.8	309.2
70°	677.6	476.7	298.8	273.0	262.7
72.5°	574.5	383.7	249.9	229.4	224.1
75°	474.0	293.6	206.1	188.0	185.6
77.5°	373.7	208.5	162.4	152.0	146.8
80°	280.7	149.6	123.6	113.4	113.4
82.5°	195.7	100.6	85.0	79.8	79.8
85°	110.7	56.6	48.9	48.9	48.9
87.5°	41.2	20.5	20.5	18.1	18.1
90°	1.4	17.7	29.4	36.9	39.7
92.5°	36.9	30.9	35.3	38.3	39.7
95°	95.6	47.0	57.3	64.8	63.3
97.5°	172.1	51.6	75.0	79.6	80.9
100°	260.6	58.9	83.9	95.6	98.6
102.5°	357.6	354.8	86.9	103.0	107.5
105°	447.5	491.6	89.8	105.9	111.8
107.5°	551.9	588.7	92.8	108.9	114.9
110°	652.1	682.9	257.6	110.5	116.2

TEST NUMBER: P921069

CATALOG NUMBER: DFN2DIP-TR4F0-080D070US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	746.3	772.7	747.7	113.2	117.8
115°	846.3	871.2	908.1	226.7	120.8
117.5°	933.1	962.5	987.7	777.1	391.5
120°	1030.3	1052.3	1078.9	1096.6	897.8
122.5°	1112.6	1136.2	1165.8	1174.5	1176.0
125°	1196.5	1215.7	1243.7	1254.0	1258.3
127.5°	1273.1	1293.6	1315.9	1330.6	1332.0
130°	1345.2	1368.8	1384.9	1401.2	1399.8
132.5°	1418.8	1438.0	1454.1	1467.4	1466.0
135°	1480.7	1504.2	1517.4	1532.2	1529.3
137.5°	1545.3	1563.1	1577.9	1592.6	1588.2
140°	1608.6	1620.5	1636.6	1649.8	1642.5
142.5°	1661.7	1672.1	1691.1	1702.8	1695.5
145°	1717.7	1716.1	1741.1	1751.4	1744.1
147.5°	1766.1	1761.8	1786.7	1794.1	1788.3
150°	1813.3	1803.0	1826.6	1835.3	1828.0
152.5°	1853.0	1841.2	1863.3	1872.2	1861.9
155°	1891.3	1878.1	1895.7	1904.5	1892.8
157.5°	1922.2	1910.5	1923.7	1934.1	1922.2
160°	1948.8	1939.8	1948.8	1957.5	1947.1
162.5°	1972.2	1963.4	1970.7	1981.1	1967.8
165°	1992.8	1984.1	1988.4	1998.7	1988.4
167.5°	2009.1	2000.1	2004.7	2015.0	2001.7
170°	2022.3	2013.4	2016.4	2026.7	2013.4
172.5°	2031.1	2022.3	2025.3	2035.6	2022.3
175°	2038.4	2028.1	2031.1	2041.3	2026.7
177.5°	2041.3	2031.1	2032.6	2043.0	2029.6
180°	2034.0	2034.0	2034.0	2034.0	2034.0

TEST NUMBER: P921069

CATALOG NUMBER: DFN2DIP-TR4F0-080D070US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.94	10.76	10.90	11.74	13.02	5.91	6.74	6.88	7.71	8.99
	3H	11.61	12.35	12.59	13.34	14.64	7.10	7.84	8.08	8.82	10.13
	4H	12.22	12.92	13.21	13.91	15.22	7.55	8.25	8.54	9.24	10.55
	6H	12.64	13.29	13.64	14.28	15.60	7.87	8.51	8.87	9.51	10.83
	8H	12.77	13.38	13.78	14.39	15.71	7.96	8.57	8.97	9.59	10.90
	12H	12.83	13.41	13.84	14.42	15.76	8.01	8.59	9.02	9.59	10.94
4H	2H	9.95	10.65	10.95	11.64	12.95	6.50	7.20	7.50	8.19	9.50
	3H	11.78	12.36	12.79	13.38	14.71	7.85	8.44	8.86	9.45	10.78
	4H	12.47	13.00	13.49	14.02	15.36	8.40	8.93	9.42	9.95	11.29
	6H	12.99	13.44	14.01	14.48	15.83	8.82	9.28	9.85	10.31	11.66
	8H	13.16	13.59	14.19	14.62	15.98	8.95	9.38	9.98	10.41	11.77
	12H	13.26	13.64	14.30	14.69	16.05	9.02	9.40	10.06	10.45	11.81
8H	4H	12.44	12.87	13.47	13.90	15.25	8.68	9.11	9.71	10.14	11.50
	6H	13.01	13.36	14.06	14.43	15.79	9.20	9.55	10.25	10.62	11.98
	8H	13.22	13.53	14.28	14.59	15.96	9.39	9.70	10.45	10.76	12.13
	12H	13.36	13.63	14.42	14.68	16.10	9.51	9.79	10.57	10.84	12.25
12H	4H	12.39	12.78	13.44	13.82	15.19	8.69	9.07	9.73	10.12	11.48
	6H	12.98	13.29	14.04	14.35	15.72	9.25	9.56	10.31	10.62	11.99
	8H	13.20	13.48	14.27	14.53	15.94	9.46	9.73	10.52	10.78	12.20