

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P923960

Luminaire Tested: DFN2DIP-TR4F0-120D120US940-RLFL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P923960
REPORT IS A COMBINATION OF REPORTS P900530 AND P897293
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-120D120US940-RLLFLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 18565.4 lumens
Efficiency: N/A
Efficacy: 85.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 217
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9821
Total Harmonic Distortion (THDi): 0.08
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P923960

CATALOG NUMBER: DFN2DIP-TR4F0-120D120US940-RLLFLL

Luminous Intensity Polar Plot

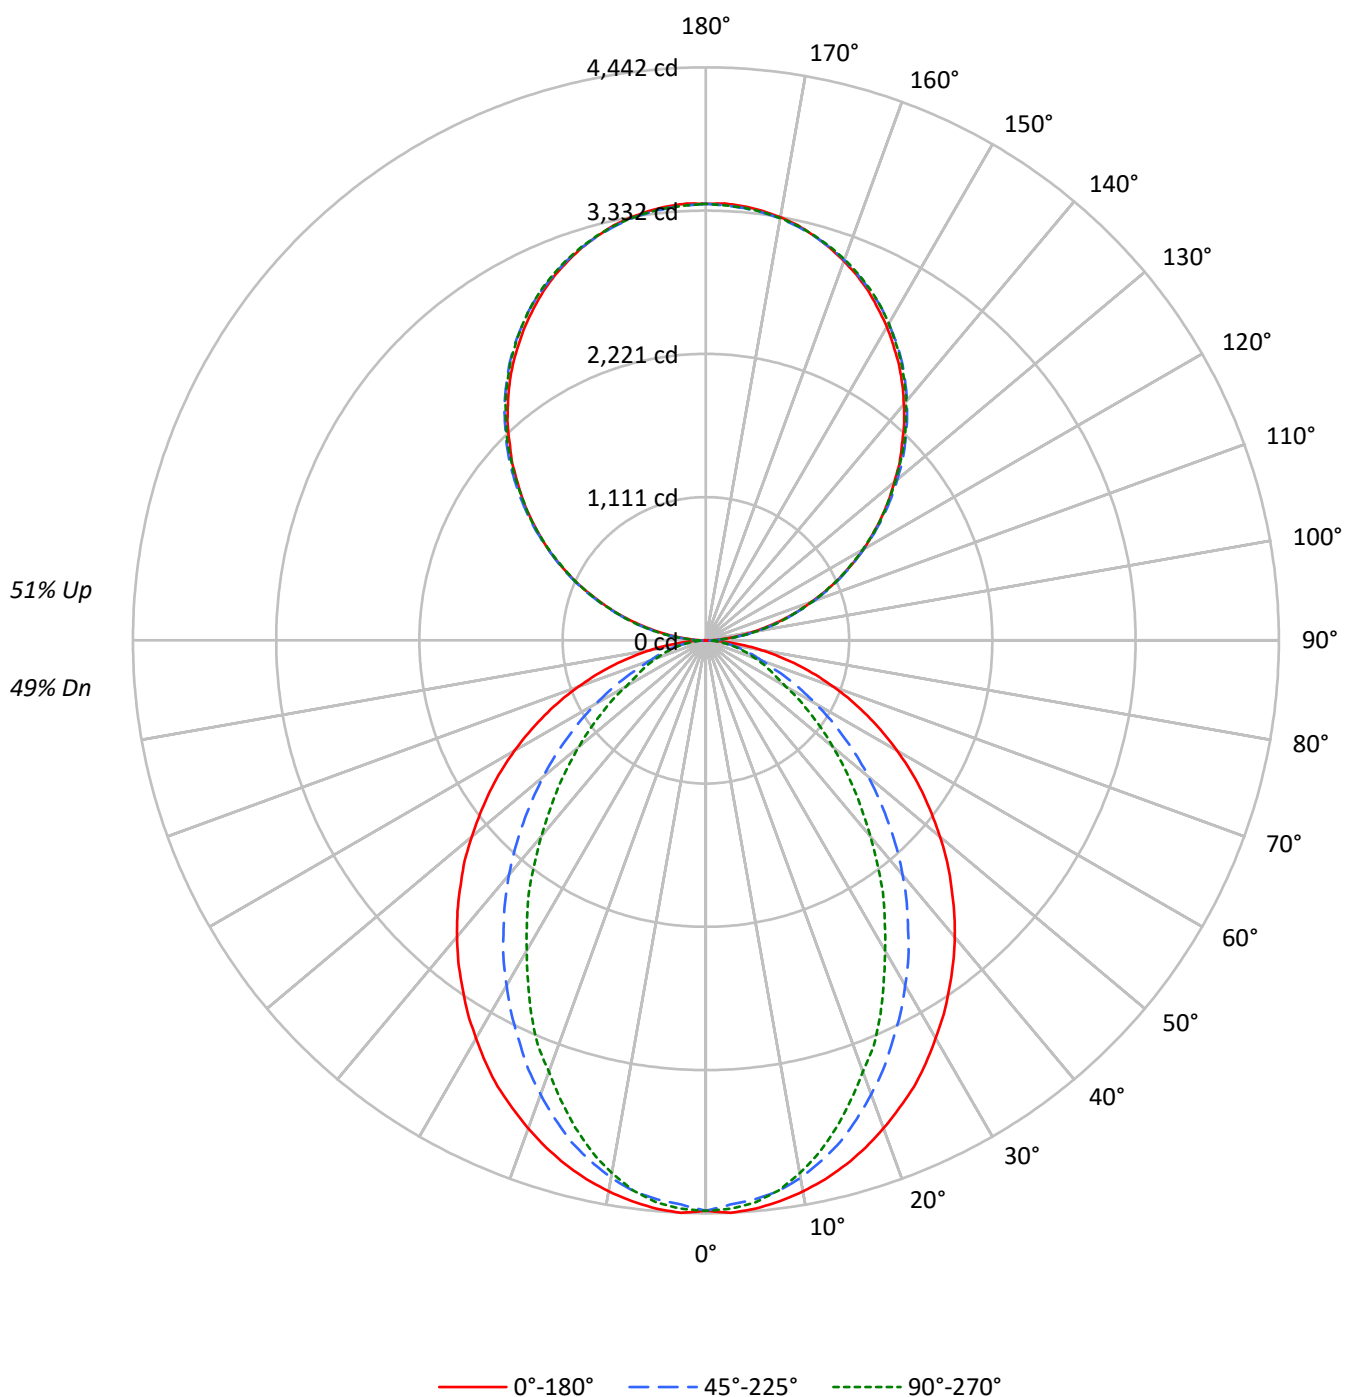

TEST NUMBER: P923960

CATALOG NUMBER: DFN2DIP-TR4F0-120D120US940-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3513	3513	3513
5°	3519	3458	3480
10°	3484	3390	3366
15°	3436	3278	3191
20°	3373	3123	2976
25°	3308	2950	2769
30°	3221	2773	2506
35°	3135	2582	2274
40°	3048	2384	2009
45°	2947	2165	1769
50°	2843	1944	1535
55°	2734	1707	1309
60°	2608	1460	1078
65°	2462	1209	970
70°	2286	975	877
75°	2065	859	798
80°	1745	721	692
85°	1216	481	519

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2947 cd/sqm

TEST NUMBER: P923960

CATALOG NUMBER: DFN2DIP-TR4F0-120D120US940-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	414.5	2.2
10°-20°	1137.8	6.1
20°-30°	1597.5	8.6
30°-40°	1741.4	9.4
40°-50°	1600.5	8.6
50°-60°	1256.9	6.8
60°-70°	818.2	4.4
70°-80°	421.2	2.3
80°-90°	117.1	0.6
90°-100°	209.4	1.1
100°-110°	665.4	3.6
110°-120°	1138.7	6.1
120°-130°	1497.5	8.1
130°-140°	1680.9	9.1
140°-150°	1648.3	8.9
150°-160°	1382.7	7.4
160°-170°	917.0	4.9
170°-180°	320.5	1.7
0°-30°	3149.8	17.0
0°-40°	4891.2	26.3
0°-60°	7748.6	41.7
0°-90°	9105.0	49.0
90°-120°	2013.4	10.8
90°-150°	6840.1	36.8
90°-180°	9460.0	51.0
0°-180°	18565.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4422	4422	4422	4422	4422	
5°	4422	4403	4350	4386	4375	419
15°	4206	4162	4026	3950	3910	1185
25°	3818	3690	3426	3262	3202	1756
35°	3290	3086	2734	2482	2393	2059
45°	2690	2421	2001	1717	1621	2077
55°	2045	1733	1301	1061	985	1827
65°	1381	1056	696	560	548	1369
75°	736	456	320	292	288	779
85°	172	88	76	76	76	197
90°	3	37	100	94	97	18
95°	149	178	183	183	178	166
105°	614	622	628	634	634	648
115°	1143	1159	1154	1151	1143	1130
125°	1662	1688	1679	1670	1667	1485
135°	2150	2181	2188	2184	2176	1662
145°	2610	2630	2646	2650	2638	1631
155°	2984	2992	3002	3016	3007	1374
165°	3246	3243	3243	3264	3250	916
175°	3378	3370	3364	3384	3367	321
180°	3384	3384	3384	3384	3384	

TEST NUMBER: P923960

CATALOG NUMBER: DFN2DIP-TR4F0-120D120US940-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4422.5	4422.5	4422.5	4422.5	4422.5
2.5°	4442.5	4422.5	4378.4	4418.7	4410.6
5°	4422.5	4402.6	4350.3	4386.4	4374.6
7.5°	4386.4	4362.6	4306.6	4322.3	4302.3
10°	4338.4	4310.4	4230.5	4218.2	4194.5
12.5°	4278.5	4242.5	4134.1	4110.4	4066.3
15°	4206.4	4162.2	4026.3	3950.3	3910.4
17.5°	4122.3	4058.2	3890.0	3802.2	3738.0
20°	4026.3	3946.1	3746.1	3646.3	3557.9
22.5°	3922.3	3830.2	3597.9	3462.0	3402.1
25°	3818.3	3690.0	3425.9	3262.0	3201.7
27.5°	3694.3	3557.9	3265.8	3077.7	2985.5
30°	3562.2	3409.8	3089.6	2885.8	2777.5
32.5°	3434.0	3249.7	2921.9	2681.6	2581.3
35°	3290.1	3085.8	2733.7	2481.5	2393.2
37.5°	3149.9	2929.5	2557.5	2281.1	2181.3
40°	3001.7	2761.8	2373.3	2089.2	1985.1
42.5°	2849.6	2593.6	2189.4	1893.0	1793.2
45°	2689.6	2421.3	2001.3	1716.8	1620.8
47.5°	2537.5	2253.5	1821.2	1536.8	1448.9
50°	2369.5	2085.4	1645.0	1368.6	1285.0
52.5°	2205.1	1904.9	1476.9	1212.7	1136.8
55°	2045.0	1732.9	1300.6	1060.7	984.7
57.5°	1881.1	1560.9	1144.8	920.6	856.5
60°	1713.0	1392.8	980.4	776.7	712.6
62.5°	1549.1	1228.9	840.3	648.5	616.5
65°	1380.9	1056.5	696.4	560.5	548.2
67.5°	1220.8	896.3	560.5	492.1	480.3
70°	1052.7	740.6	464.1	424.2	408.0
72.5°	892.6	596.2	388.1	356.2	348.2
75°	736.3	456.0	320.2	292.1	288.3
77.5°	580.5	324.0	252.3	236.1	228.0
80°	436.1	232.3	191.9	176.2	176.2
82.5°	304.1	156.2	132.1	123.9	123.9
85°	172.0	87.9	76.0	76.0	76.0
87.5°	64.1	31.8	31.8	28.0	28.0
90°	3.0	36.7	100.0	93.9	96.9
92.5°	63.2	85.7	88.7	91.8	91.8
95°	148.9	177.5	182.6	182.6	177.5
97.5°	247.9	274.5	285.7	285.7	285.7
100°	362.2	385.7	393.8	393.8	390.7
102.5°	482.6	499.9	511.1	514.2	511.1
105°	614.2	622.3	628.5	633.6	633.6
107.5°	744.8	757.1	757.1	759.0	744.8
110°	871.3	887.6	887.6	887.6	879.5

TEST NUMBER: P923960

CATALOG NUMBER: DFN2DIP-TR4F0-120D120US940-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1008.0	1025.4	1022.3	1014.1	1008.0
115°	1142.6	1159.0	1153.9	1150.8	1142.6
117.5°	1276.3	1298.8	1284.5	1276.3	1268.2
120°	1411.0	1433.4	1411.0	1411.0	1401.9
122.5°	1533.5	1562.0	1547.7	1539.5	1533.5
125°	1662.0	1687.5	1679.4	1670.2	1667.1
127.5°	1787.5	1819.1	1807.9	1795.6	1787.5
130°	1904.8	1941.5	1936.4	1930.3	1919.0
132.5°	2036.4	2065.0	2067.0	2052.7	2044.6
135°	2149.6	2181.3	2187.5	2184.3	2176.2
137.5°	2276.2	2301.7	2306.8	2304.7	2292.5
140°	2387.4	2412.9	2427.1	2427.1	2415.9
142.5°	2501.7	2527.2	2535.3	2538.3	2527.2
145°	2609.8	2630.2	2646.5	2649.6	2638.4
147.5°	2706.7	2732.2	2744.5	2749.6	2738.4
150°	2806.7	2824.0	2835.3	2844.5	2835.3
152.5°	2895.5	2912.8	2927.1	2938.4	2927.1
155°	2984.2	2992.4	3001.6	3015.9	3006.7
157.5°	3060.8	3066.9	3071.9	3092.4	3078.1
160°	3129.1	3135.3	3138.3	3155.7	3143.4
162.5°	3192.3	3192.3	3195.4	3214.8	3200.5
165°	3246.4	3243.4	3243.4	3263.7	3249.5
167.5°	3295.4	3286.2	3286.2	3306.6	3292.4
170°	3332.1	3323.9	3320.9	3341.3	3323.9
172.5°	3357.6	3349.4	3346.4	3366.8	3349.4
175°	3378.1	3369.9	3363.8	3384.1	3366.8
177.5°	3389.3	3381.1	3374.9	3392.3	3374.9
180°	3384.1	3384.1	3384.1	3384.1	3384.1

TEST NUMBER: P923960

CATALOG NUMBER: DFN2DIP-TR4F0-120D120US940-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.42	12.24	12.39	13.22	14.51	7.39	8.21	8.36	9.19	10.48
	3H	13.09	13.83	14.08	14.82	16.13	8.58	9.31	9.56	10.30	11.61
	4H	13.70	14.40	14.70	15.39	16.71	9.03	9.72	10.03	10.72	12.04
	6H	14.12	14.76	15.13	15.76	17.09	9.35	9.99	10.36	10.99	12.32
	8H	14.25	14.86	15.26	15.87	17.20	9.44	10.05	10.45	11.07	12.39
	12H	14.31	14.89	15.33	15.90	17.25	9.48	10.06	10.50	11.07	12.42
4H	2H	11.43	12.13	12.44	13.12	14.44	7.98	8.68	8.99	9.67	10.99
	3H	13.26	13.84	14.27	14.86	16.19	9.33	9.91	10.35	10.94	12.27
	4H	13.95	14.48	14.97	15.50	16.85	9.88	10.41	10.90	11.43	12.78
	6H	14.47	14.92	15.50	15.96	17.31	10.30	10.76	11.33	11.79	13.15
	8H	14.64	15.07	15.67	16.10	17.46	10.43	10.85	11.46	11.89	13.25
	12H	14.74	15.12	15.79	16.17	17.54	10.50	10.88	11.54	11.93	13.30
8H	4H	13.92	14.34	14.95	15.38	16.74	10.16	10.59	11.19	11.62	12.98
	6H	14.49	14.84	15.54	15.91	17.27	10.68	11.03	11.74	12.10	13.47
	8H	14.70	15.01	15.76	16.07	17.45	10.87	11.18	11.93	12.24	13.62
	12H	14.84	15.11	15.91	16.17	17.59	10.99	11.26	12.06	12.32	13.74
12H	4H	13.87	14.25	14.92	15.30	16.67	10.17	10.55	11.21	11.60	12.97
	6H	14.46	14.77	15.52	15.83	17.21	10.73	11.04	11.79	12.10	13.48
	8H	14.68	14.95	15.75	16.01	17.43	10.94	11.21	12.01	12.26	13.69

END OF REPORT