

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926463

Luminaire Tested: DFN2DIP-TR4F0-060D100US950-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P926463
REPORT IS A COMBINATION OF REPORTS P902001 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-060D100US950-FLLONL
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15111.4 lumens
Efficiency: N/A
Efficacy: 116.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 129.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926463

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US950-FLLONL

Luminous Intensity Polar Plot

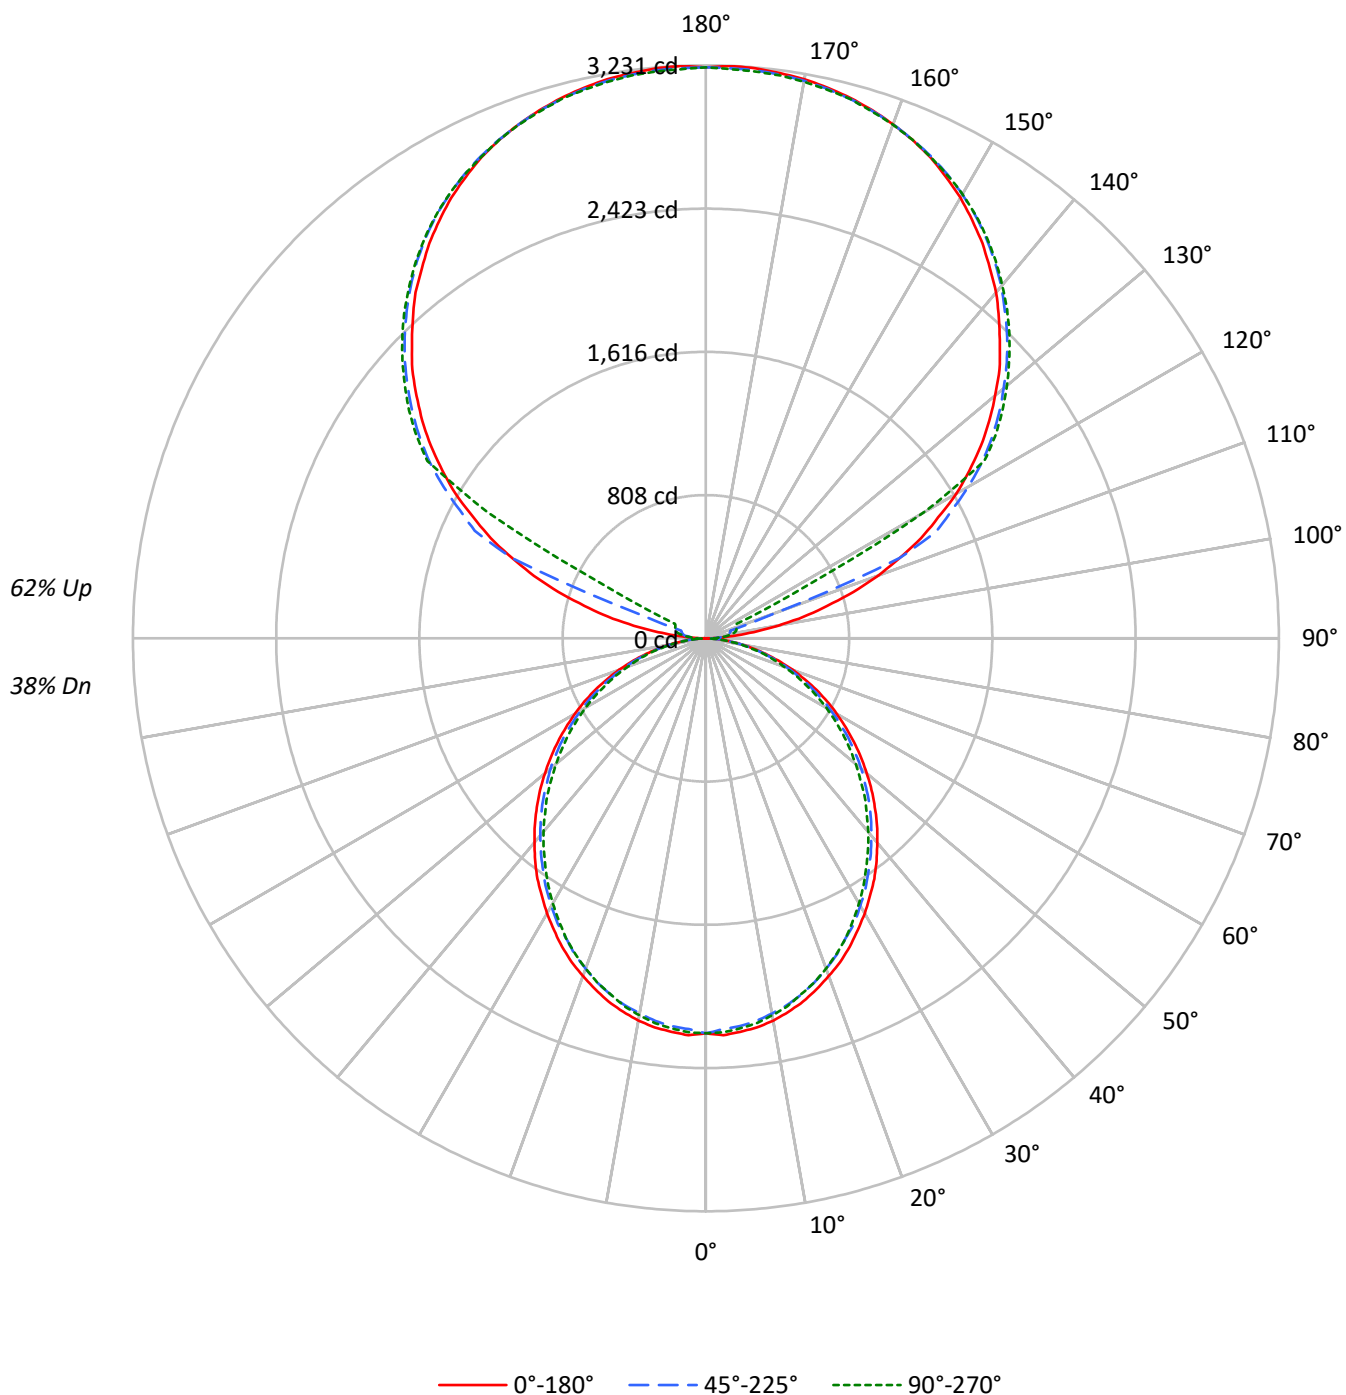

TEST NUMBER: P926463

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US950-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45
1	95	91	87	83	86	82	79	76	67	65	63	53	51	50	39	39	38
2	86	79	73	68	78	72	67	63	59	55	52	46	44	42	35	33	32
3	79	70	62	57	71	63	57	52	52	47	44	41	38	35	31	29	27
4	72	62	54	48	65	56	49	44	46	41	37	36	33	30	27	25	23
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	22	20
6	61	49	41	35	55	45	38	33	37	32	28	29	26	23	22	20	18
7	56	44	36	31	51	40	34	29	33	28	24	27	23	20	20	18	16
8	52	40	32	27	47	37	30	25	30	25	22	24	21	18	19	16	14
9	48	36	29	24	44	33	27	23	28	23	19	22	19	16	17	15	13
10	45	33	26	22	41	31	24	20	26	21	17	21	17	14	16	13	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1769	1769	1769
5°	1772	1745	1756
10°	1758	1721	1733
15°	1732	1693	1695
20°	1697	1653	1657
25°	1662	1606	1613
30°	1619	1563	1557
35°	1578	1511	1498
40°	1527	1459	1442
45°	1476	1406	1384
50°	1421	1351	1317
55°	1363	1288	1256
60°	1297	1212	1186
65°	1226	1134	1102
70°	1135	1039	1013
75°	1009	925	931
80°	857	780	773
85°	620	529	513

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1709 cd/sqm

TEST NUMBER: P926463

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US950-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	209.6	1.4
10°-20°	589.8	3.9
20°-30°	866.8	5.7
30°-40°	1006.7	6.7
40°-50°	1005.5	6.7
50°-60°	876.7	5.8
60°-70°	648.1	4.3
70°-80°	366.7	2.4
80°-90°	102.5	0.7
90°-100°	106.2	0.7
100°-110°	395.8	2.6
110°-120°	1049.6	6.9
120°-130°	1740.9	11.5
130°-140°	1849.2	12.2
140°-150°	1718.7	11.4
150°-160°	1381.8	9.1
160°-170°	890.4	5.9
170°-180°	306.5	2.0
0°-30°	1666.2	11.0
0°-40°	2673.0	17.7
0°-60°	4555.2	30.1
0°-90°	5672.4	37.5
90°-120°	1551.6	10.3
90°-150°	6860.4	45.4
90°-180°	9439.0	62.5
0°-180°	15111.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2227	2227	2227	2227	2227	
5°	2227	2219	2195	2212	2208	211
15°	2120	2108	2080	2088	2078	597
25°	1919	1902	1866	1870	1866	883
35°	1656	1634	1600	1587	1576	1034
45°	1347	1332	1300	1276	1268	1040
55°	1020	1007	981	955	945	912
65°	688	675	653	634	623	680
75°	360	356	345	332	336	384
85°	88	86	84	77	75	98
90°	2	28	46	58	63	14
95°	151	74	91	103	100	179
105°	708	778	142	168	177	757
115°	1340	1379	1438	359	191	1319
125°	1894	1924	1969	1985	1992	1689
135°	2344	2381	2402	2425	2421	1810
145°	2719	2716	2756	2772	2761	1700
155°	2994	2973	3001	3015	2996	1380
165°	3154	3140	3147	3164	3147	891
175°	3226	3210	3215	3231	3208	307
180°	3220	3220	3220	3220	3220	

TEST NUMBER: P926463

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US950-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2227.2	2227.2	2227.2	2227.2	2227.2
2.5°	2240.2	2229.5	2205.8	2227.2	2223.1
5°	2227.2	2218.8	2195.2	2212.2	2208.1
7.5°	2212.2	2199.5	2175.9	2193.2	2188.9
10°	2188.9	2173.9	2148.1	2165.2	2158.8
12.5°	2156.6	2143.8	2118.2	2128.9	2124.6
15°	2120.2	2107.5	2079.5	2088.2	2077.5
17.5°	2075.2	2062.5	2034.6	2045.2	2034.6
20°	2025.9	2013.2	1983.2	1989.6	1981.2
22.5°	1976.9	1957.5	1929.6	1929.6	1925.3
25°	1918.9	1901.9	1865.5	1869.6	1865.5
27.5°	1854.6	1839.6	1811.8	1805.5	1794.9
30°	1790.6	1773.2	1741.2	1734.8	1726.2
32.5°	1721.9	1709.2	1674.8	1661.9	1653.3
35°	1655.6	1634.2	1599.9	1586.9	1576.2
37.5°	1580.6	1561.2	1527.0	1511.9	1501.2
40°	1503.5	1486.2	1452.0	1432.9	1424.2
42.5°	1428.5	1411.3	1377.2	1355.6	1342.9
45°	1347.2	1332.2	1299.9	1276.5	1267.9
47.5°	1267.9	1252.9	1218.6	1195.0	1182.2
50°	1184.3	1173.6	1143.7	1113.6	1102.9
52.5°	1102.9	1087.9	1060.2	1036.6	1021.6
55°	1019.5	1006.6	980.9	955.2	944.6
57.5°	936.0	925.3	897.3	871.7	863.0
60°	852.3	843.9	814.0	790.3	783.9
62.5°	770.9	755.9	734.6	713.2	704.6
65°	687.5	674.7	653.3	633.9	623.2
67.5°	601.9	591.0	571.9	556.9	548.3
70°	522.6	514.0	494.6	479.7	471.3
72.5°	441.2	432.6	422.0	407.0	400.6
75°	359.7	355.7	344.7	332.0	336.3
77.5°	287.0	278.4	274.0	267.7	261.3
80°	214.3	212.0	207.7	201.3	197.0
82.5°	145.7	145.7	143.6	135.0	135.0
85°	87.7	85.7	83.6	77.0	75.0
87.5°	38.6	34.3	30.0	23.7	21.4
90°	2.2	28.0	46.5	58.4	62.8
92.5°	58.4	48.9	55.9	60.6	62.8
95°	151.3	74.4	90.7	102.7	100.2
97.5°	272.5	81.6	118.7	125.8	128.1
100°	412.5	93.2	132.8	151.3	156.1
102.5°	566.0	561.6	137.5	162.9	170.1
105°	708.2	778.2	142.2	167.6	177.1
107.5°	873.7	931.8	146.9	172.4	181.7
110°	1032.1	1080.9	407.7	174.9	183.9

TEST NUMBER: P926463

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US950-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1181.2	1223.0	1183.5	179.3	186.5
115°	1339.5	1379.1	1437.5	358.8	191.2
117.5°	1477.0	1523.5	1563.3	1230.0	619.7
120°	1630.9	1665.7	1707.8	1735.7	1421.2
122.5°	1761.2	1798.5	1845.2	1859.1	1861.5
125°	1894.0	1924.4	1968.7	1985.0	1991.9
127.5°	2015.1	2047.8	2082.9	2106.1	2108.3
130°	2129.3	2166.7	2192.2	2217.9	2215.7
132.5°	2245.8	2276.2	2301.7	2322.7	2320.5
135°	2343.8	2381.1	2401.9	2425.4	2420.7
137.5°	2446.2	2474.1	2497.6	2520.8	2513.9
140°	2546.2	2565.1	2590.5	2611.6	2599.9
142.5°	2630.4	2646.7	2676.8	2695.3	2683.8
145°	2718.9	2716.4	2756.0	2772.3	2760.7
147.5°	2795.5	2788.6	2828.1	2839.8	2830.7
150°	2870.2	2853.9	2891.3	2905.1	2893.5
152.5°	2933.0	2914.5	2949.4	2963.4	2947.1
155°	2993.7	2972.9	3000.8	3014.6	2996.1
157.5°	3042.6	3024.1	3045.1	3061.4	3042.6
160°	3084.7	3070.5	3084.7	3098.5	3082.2
162.5°	3121.7	3107.8	3119.5	3135.8	3114.8
165°	3154.3	3140.5	3147.4	3163.8	3147.4
167.5°	3180.1	3165.9	3173.2	3189.5	3168.4
170°	3201.1	3187.0	3191.7	3208.0	3187.0
172.5°	3214.9	3201.1	3205.8	3222.1	3201.1
175°	3226.5	3210.2	3214.9	3231.3	3208.0
177.5°	3231.3	3214.9	3217.5	3233.8	3212.7
180°	3219.7	3219.7	3219.7	3219.7	3219.7

TEST NUMBER: P926463

CATALOG NUMBER: DFN2DIP-TR4F0-060D100US950-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.97	8.73	9.03	9.79	11.23	7.54	8.30	8.60	9.36	10.80
	3H	9.63	10.31	10.69	11.38	12.83	9.15	9.83	10.22	10.90	12.36
	4H	10.21	10.85	11.29	11.93	13.39	9.74	10.38	10.81	11.45	12.92
	6H	10.60	11.20	11.69	12.27	13.75	10.13	10.72	11.22	11.80	13.27
	8H	10.71	11.27	11.80	12.36	13.83	10.23	10.80	11.32	11.89	13.36
	12H	10.75	11.29	11.85	12.37	13.87	10.27	10.81	11.37	11.89	13.39
4H	2H	8.42	9.07	9.51	10.14	11.60	8.08	8.72	9.16	9.80	11.26
	3H	10.28	10.82	11.37	11.92	13.39	9.89	10.43	10.98	11.52	13.00
	4H	10.99	11.48	12.09	12.57	14.07	10.58	11.08	11.68	12.17	13.67
	6H	11.50	11.92	12.60	13.04	14.53	11.09	11.51	12.19	12.63	14.12
	8H	11.65	12.04	12.75	13.15	14.65	11.23	11.63	12.34	12.73	14.24
	12H	11.71	12.07	12.84	13.19	14.70	11.29	11.65	12.42	12.77	14.28
8H	4H	11.18	11.57	12.28	12.68	14.18	10.82	11.21	11.92	12.32	13.82
	6H	11.81	12.13	12.93	13.28	14.78	11.44	11.77	12.57	12.92	14.42
	8H	12.03	12.31	13.16	13.44	14.96	11.66	11.94	12.79	13.07	14.59
	12H	12.15	12.40	13.29	13.53	15.09	11.77	12.02	12.90	13.14	14.70
12H	4H	11.16	11.52	12.28	12.63	14.15	10.81	11.17	11.93	12.28	13.79
	6H	11.83	12.12	12.97	13.25	14.77	11.48	11.77	12.62	12.90	14.42
	8H	12.07	12.32	13.21	13.45	15.01	11.71	11.97	12.85	13.09	14.65