

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926509

Luminaire Tested: DFN2DIP-TR4F0-070D120US950-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P926509
REPORT IS A COMBINATION OF REPORTS P902040 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-070D120US950-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17009.7 lumens
Efficiency: N/A
Efficacy: 108.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 156.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926509

CATALOG NUMBER: DFN2DIP-TR4F0-070D120US950-RLLONL

Luminous Intensity Polar Plot

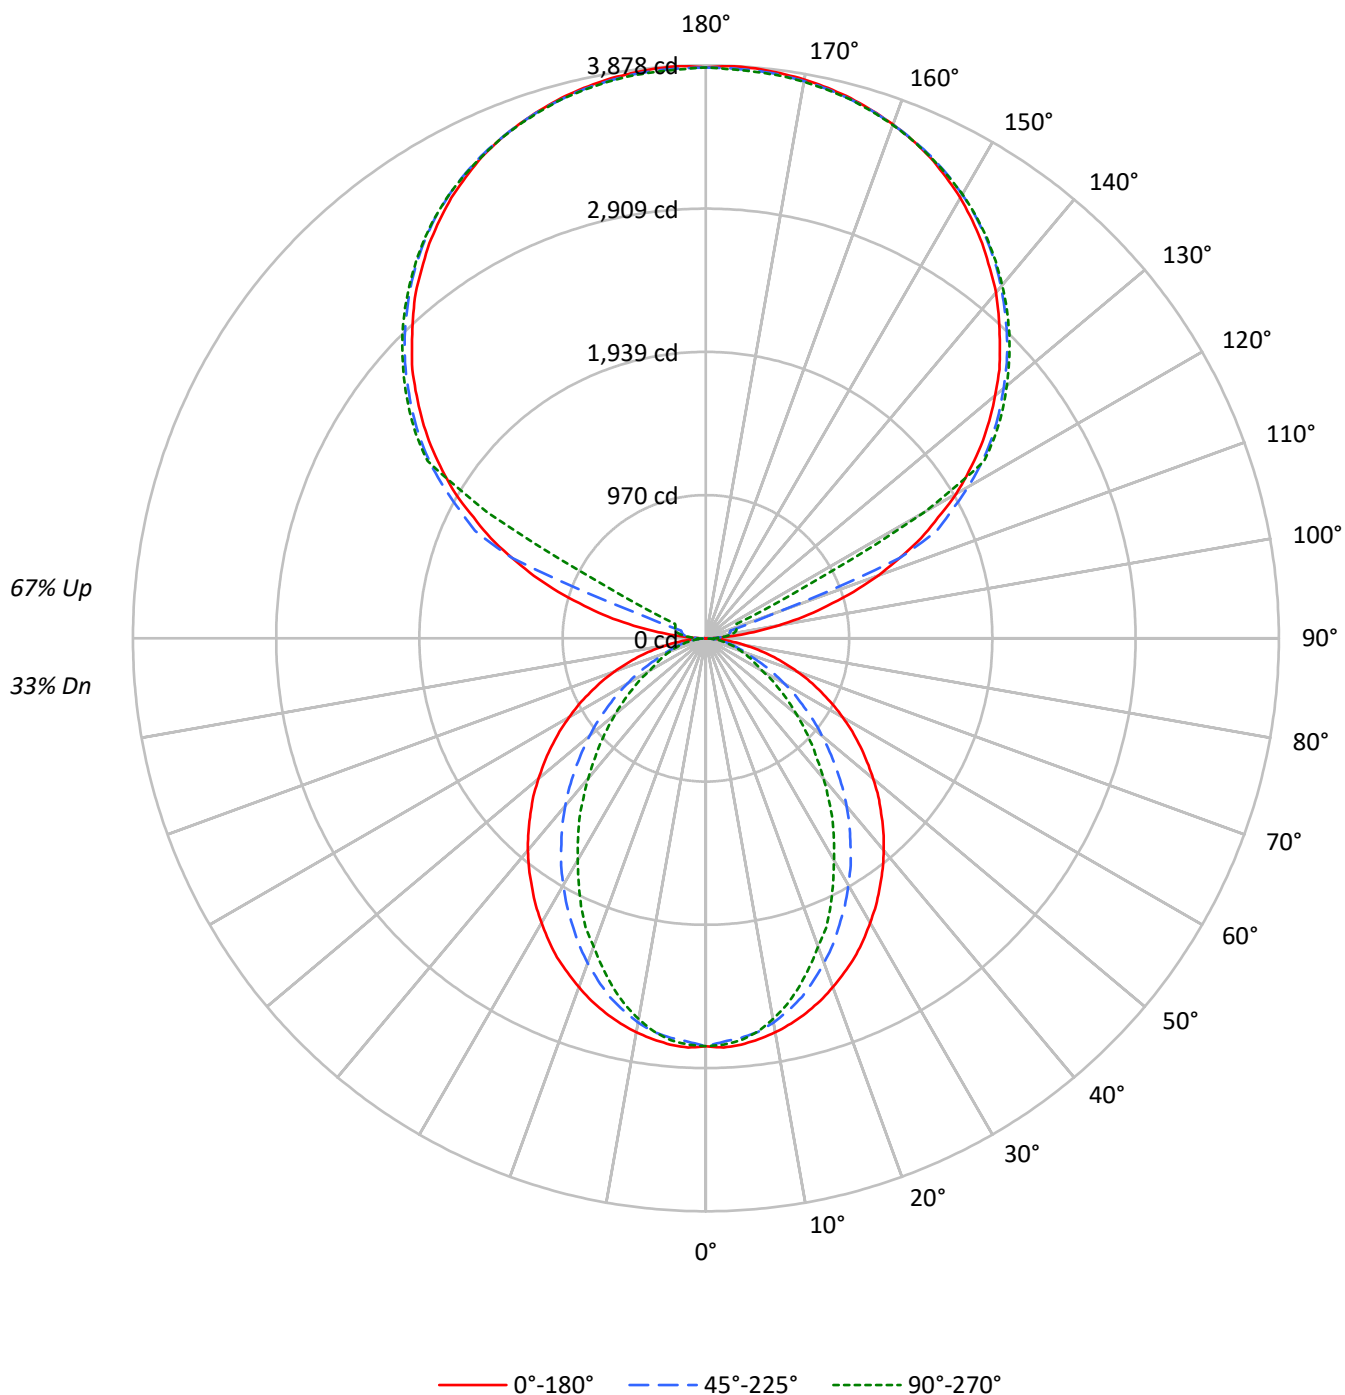

TEST NUMBER: P926509

CATALOG NUMBER: DFN2DIP-TR4F0-070D120US950-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41
1	94	90	87	83	85	82	79	76	65	63	61	50	49	48	37	36	35
2	86	79	73	69	78	72	67	63	58	54	51	45	42	40	33	31	30
3	79	70	63	57	71	63	57	53	51	47	43	40	37	35	29	27	26
4	72	62	54	49	65	56	50	45	45	41	37	36	32	30	26	24	23
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	22	20
6	61	50	42	36	55	45	38	34	37	32	28	29	25	23	22	19	18
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	20	18	16
8	52	41	33	28	47	37	31	26	30	26	22	24	21	18	18	16	14
9	49	37	30	25	44	34	28	23	28	23	20	22	19	16	17	15	13
10	45	34	27	22	41	31	25	21	26	21	18	21	17	15	16	13	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2193	2193	2193
5°	2196	2158	2172
10°	2174	2115	2101
15°	2145	2045	1992
20°	2105	1949	1857
25°	2064	1841	1728
30°	2010	1730	1564
35°	1957	1611	1420
40°	1902	1488	1254
45°	1839	1351	1104
50°	1774	1213	958
55°	1706	1066	817
60°	1627	911	673
65°	1537	755	605
70°	1427	608	547
75°	1289	536	498
80°	1089	450	432
85°	759	300	324

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2052 cd/sqm

TEST NUMBER: P926509

CATALOG NUMBER: DFN2DIP-TR4F0-070D120US950-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	258.7	1.5
10°-20°	710.1	4.2
20°-30°	997.0	5.9
30°-40°	1086.8	6.4
40°-50°	998.8	5.9
50°-60°	784.4	4.6
60°-70°	510.6	3.0
70°-80°	262.8	1.5
80°-90°	73.9	0.4
90°-100°	127.4	0.7
100°-110°	474.9	2.8
110°-120°	1259.5	7.4
120°-130°	2089.1	12.3
130°-140°	2219.1	13.0
140°-150°	2062.4	12.1
150°-160°	1658.1	9.7
160°-170°	1068.4	6.3
170°-180°	367.7	2.2
0°-30°	1965.7	11.6
0°-40°	3052.5	17.9
0°-60°	4835.8	28.4
0°-90°	5683.0	33.4
90°-120°	1861.9	10.9
90°-150°	8232.4	48.4
90°-180°	11327.0	66.6
0°-180°	17009.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2760	2760	2760	2760	2760	
5°	2760	2748	2715	2738	2730	262
15°	2625	2598	2513	2465	2440	740
25°	2383	2303	2138	2036	1998	1096
35°	2053	1926	1706	1549	1494	1285
45°	1679	1511	1249	1071	1012	1296
55°	1276	1082	812	662	615	1140
65°	862	659	435	350	342	854
75°	460	285	200	182	180	486
85°	107	55	47	47	47	123
90°	3	34	56	70	75	16
95°	182	89	109	123	120	215
105°	850	934	171	201	212	908
115°	1607	1655	1725	430	229	1582
125°	2273	2309	2362	2382	2390	2027
135°	2812	2857	2882	2910	2905	2173
145°	3263	3260	3307	3327	3313	2041
155°	3592	3567	3601	3618	3595	1655
165°	3785	3769	3777	3796	3777	1069
175°	3872	3852	3858	3878	3850	368
180°	3864	3864	3864	3864	3864	

TEST NUMBER: P926509

CATALOG NUMBER: DFN2DIP-TR4F0-070D120US950-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2760.0	2760.0	2760.0	2760.0	2760.0
2.5°	2772.4	2760.0	2732.4	2757.6	2752.6
5°	2760.0	2747.5	2715.0	2737.5	2730.1
7.5°	2737.5	2722.6	2687.7	2697.4	2685.0
10°	2707.5	2690.1	2640.2	2632.6	2617.7
12.5°	2670.2	2647.6	2580.1	2565.2	2537.6
15°	2625.1	2597.6	2512.7	2465.3	2440.4
17.5°	2572.7	2532.7	2427.7	2372.8	2332.8
20°	2512.7	2462.7	2337.9	2275.6	2220.4
22.5°	2447.9	2390.3	2245.3	2160.5	2123.2
25°	2382.9	2302.9	2138.0	2035.7	1998.2
27.5°	2305.5	2220.4	2038.1	1920.8	1863.3
30°	2223.1	2128.0	1928.1	1801.0	1733.4
32.5°	2143.1	2028.1	1823.5	1673.5	1610.9
35°	2053.2	1925.7	1706.1	1548.7	1493.6
37.5°	1965.8	1828.2	1596.1	1423.6	1361.4
40°	1873.3	1723.6	1481.1	1303.8	1238.9
42.5°	1778.4	1618.7	1366.3	1181.3	1119.1
45°	1678.6	1511.0	1249.0	1071.4	1011.5
47.5°	1583.6	1406.4	1136.6	959.1	904.2
50°	1478.7	1301.4	1026.6	854.1	801.9
52.5°	1376.1	1188.8	921.7	756.8	709.4
55°	1276.3	1081.5	811.7	662.0	614.6
57.5°	1174.0	974.1	714.5	574.5	534.5
60°	1069.1	869.2	611.9	484.7	444.7
62.5°	966.7	766.9	524.4	404.7	384.7
65°	861.7	659.3	434.6	349.8	342.1
67.5°	761.9	559.4	349.8	307.1	299.7
70°	656.9	462.1	289.6	264.7	254.6
72.5°	557.0	372.1	242.2	222.4	217.3
75°	459.5	284.6	199.8	182.3	179.9
77.5°	362.2	202.2	157.4	147.3	142.3
80°	272.2	144.9	119.8	110.0	110.0
82.5°	189.8	97.5	82.4	77.4	77.4
85°	107.3	54.9	47.4	47.4	47.4
87.5°	40.0	19.8	19.8	17.5	17.5
90°	2.7	33.5	55.8	70.0	75.4
92.5°	70.0	58.8	67.1	72.7	75.4
95°	181.5	89.3	108.9	123.2	120.2
97.5°	327.0	98.0	142.4	151.0	153.7
100°	494.9	111.9	159.3	181.5	187.3
102.5°	679.2	673.9	164.9	195.6	204.2
105°	849.8	933.9	170.7	201.2	212.5
107.5°	1048.4	1118.1	176.3	206.8	218.1
110°	1238.6	1297.1	489.3	209.8	220.8

TEST NUMBER: P926509

CATALOG NUMBER: DFN2DIP-TR4F0-070D120US950-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1417.5	1467.6	1420.2	215.1	223.7
115°	1607.4	1654.9	1724.9	430.5	229.4
117.5°	1772.4	1828.2	1876.0	1475.9	743.6
120°	1957.0	1998.8	2049.3	2082.9	1705.4
122.5°	2113.4	2158.2	2214.3	2230.9	2233.9
125°	2272.7	2309.3	2362.4	2381.9	2390.2
127.5°	2418.1	2457.3	2499.5	2527.3	2530.0
130°	2555.2	2600.0	2630.6	2661.5	2658.8
132.5°	2695.0	2731.5	2762.0	2787.3	2784.6
135°	2812.5	2857.3	2882.2	2910.5	2904.8
137.5°	2935.4	2968.8	2997.1	3024.9	3016.6
140°	3055.6	3078.1	3108.6	3133.9	3120.0
142.5°	3156.4	3176.1	3212.2	3234.4	3220.5
145°	3262.7	3259.7	3307.1	3326.8	3312.8
147.5°	3354.6	3346.3	3393.9	3407.8	3396.8
150°	3444.2	3424.7	3469.5	3486.1	3472.2
152.5°	3519.6	3497.4	3539.2	3556.1	3536.6
155°	3592.3	3567.4	3601.0	3617.6	3595.3
157.5°	3651.1	3628.8	3654.1	3673.7	3651.1
160°	3701.5	3684.6	3701.5	3718.1	3698.6
162.5°	3746.1	3729.5	3743.4	3763.0	3737.8
165°	3785.2	3768.6	3776.9	3796.5	3776.9
167.5°	3816.1	3799.1	3807.8	3827.4	3802.2
170°	3841.3	3824.4	3830.0	3849.6	3824.4
172.5°	3857.9	3841.3	3847.0	3866.6	3841.3
175°	3871.8	3852.3	3857.9	3877.5	3849.6
177.5°	3877.5	3857.9	3860.9	3880.5	3855.3
180°	3863.6	3863.6	3863.6	3863.6	3863.6

TEST NUMBER: P926509

CATALOG NUMBER: DFN2DIP-TR4F0-070D120US950-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.09	8.80	9.18	9.88	11.38	4.06	4.77	5.15	5.86	7.35
	3H	9.75	10.39	10.86	11.49	12.99	5.24	5.87	6.34	6.97	8.48
	4H	10.36	10.96	11.47	12.06	13.57	5.68	6.29	6.80	7.38	8.90
	6H	10.77	11.33	11.89	12.43	13.95	6.00	6.55	7.12	7.66	9.18
	8H	10.89	11.42	12.02	12.54	14.06	6.09	6.62	7.21	7.73	9.25
	12H	10.95	11.45	12.08	12.56	14.11	6.13	6.63	7.26	7.74	9.28
4H	2H	8.09	8.69	9.21	9.79	11.30	4.64	5.24	5.76	6.34	7.86
	3H	9.91	10.41	11.03	11.53	13.06	5.98	6.48	7.10	7.61	9.13
	4H	10.59	11.06	11.72	12.17	13.72	6.52	6.98	7.65	8.10	9.65
	6H	11.10	11.50	12.24	12.63	14.17	6.94	7.33	8.07	8.47	10.01
	8H	11.28	11.64	12.41	12.77	14.33	7.06	7.43	8.20	8.56	10.12
	12H	11.37	11.70	12.52	12.84	14.40	7.12	7.46	8.28	8.60	10.16
8H	4H	10.55	10.92	11.69	12.05	13.61	6.80	7.16	7.93	8.29	9.85
	6H	11.12	11.42	12.27	12.59	14.14	7.31	7.61	8.47	8.78	10.34
	8H	11.33	11.60	12.49	12.75	14.32	7.50	7.77	8.66	8.92	10.49
	12H	11.46	11.70	12.63	12.84	14.45	7.62	7.85	8.78	9.00	10.60
12H	4H	10.50	10.83	11.65	11.97	13.53	6.79	7.13	7.95	8.27	9.83
	6H	11.09	11.36	12.25	12.51	14.08	7.36	7.62	8.52	8.77	10.35
	8H	11.31	11.54	12.47	12.69	14.29	7.57	7.80	8.73	8.94	10.55