

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926635

Luminaire Tested: DFN2DIP-TR4F0-110D080US950-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P926635
REPORT IS A COMBINATION OF REPORTS P901975 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-110D080US950-FLLONL
Description: 4 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17944.8 lumens
Efficiency: N/A
Efficacy: 104.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 171.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926635

CATALOG NUMBER: DFN2DIP-TR4F0-110D080US950-FLLONL

Luminous Intensity Polar Plot

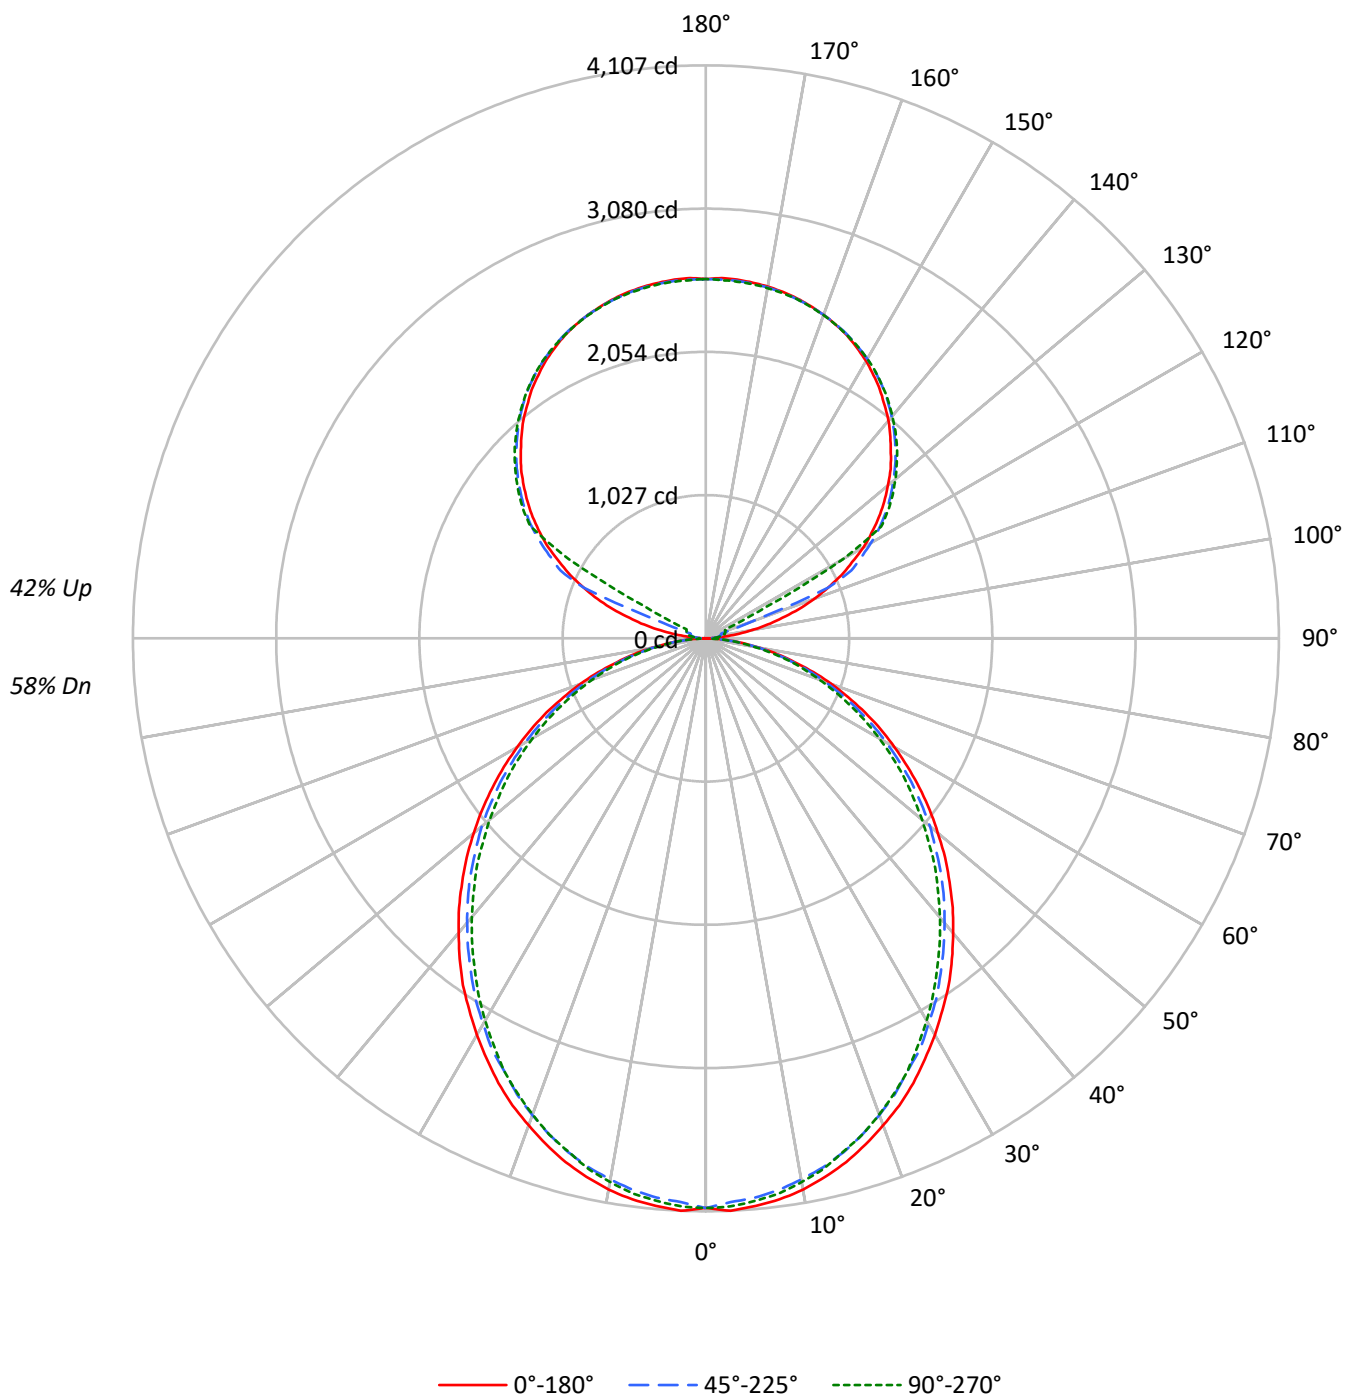

TEST NUMBER: P926635

CATALOG NUMBER: DFN2DIP-TR4F0-110D080US950-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	63	63	63
1	100	95	91	88	93	89	85	82	77	74	72	66	64	63	56	55	54
2	91	83	77	72	84	78	72	68	67	63	60	58	55	52	49	47	45
3	83	73	66	60	77	68	62	57	60	54	50	51	47	44	44	41	38
4	76	65	57	51	70	61	54	48	53	47	43	46	41	38	39	36	33
5	70	58	50	43	65	54	47	41	47	42	37	41	37	33	35	32	29
6	64	52	44	38	60	49	41	36	43	37	32	37	32	29	32	28	25
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	29	26	23
8	55	43	35	29	51	40	33	28	35	30	25	31	26	23	27	23	20
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	18
10	48	36	28	24	45	34	27	23	30	24	21	26	22	19	23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3244	3244	3244
5°	3249	3199	3220
10°	3223	3156	3176
15°	3175	3104	3108
20°	3111	3031	3038
25°	3048	2945	2958
30°	2968	2865	2855
35°	2892	2770	2746
40°	2799	2674	2643
45°	2706	2578	2538
50°	2605	2477	2415
55°	2499	2361	2303
60°	2379	2223	2174
65°	2248	2080	2021
70°	2081	1905	1858
75°	1849	1696	1707
80°	1572	1429	1418
85°	1137	970	940

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2706 cd/sqm

TEST NUMBER: P926635

CATALOG NUMBER: DFN2DIP-TR4F0-110D080US950-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	384.3	2.1
10°-20°	1081.3	6.0
20°-30°	1589.1	8.9
30°-40°	1845.7	10.3
40°-50°	1843.4	10.3
50°-60°	1607.4	9.0
60°-70°	1188.2	6.6
70°-80°	672.3	3.7
80°-90°	182.0	1.0
90°-100°	84.9	0.5
100°-110°	316.6	1.8
110°-120°	839.7	4.7
120°-130°	1392.7	7.8
130°-140°	1479.4	8.2
140°-150°	1374.9	7.7
150°-160°	1105.4	6.2
160°-170°	712.3	4.0
170°-180°	245.2	1.4
0°-30°	3054.8	17.0
0°-40°	4900.4	27.3
0°-60°	8351.2	46.5
0°-90°	10393.6	57.9
90°-120°	1241.3	6.9
90°-150°	5488.3	30.6
90°-180°	7551.0	42.1
0°-180°	17944.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4083	4083	4083	4083	4083	
5°	4083	4068	4024	4056	4048	388
15°	3887	3864	3812	3828	3809	1095
25°	3518	3487	3420	3428	3420	1619
35°	3035	2996	2933	2909	2890	1895
45°	2470	2442	2383	2340	2324	1906
55°	1869	1845	1798	1751	1732	1671
65°	1260	1237	1198	1162	1143	1246
75°	659	652	632	609	617	704
85°	161	157	153	141	138	179
90°	2	22	37	47	50	17
95°	121	60	73	82	80	143
105°	567	623	114	134	142	605
115°	1072	1103	1150	287	153	1055
125°	1515	1540	1575	1588	1594	1351
135°	1875	1905	1922	1940	1936	1448
145°	2175	2173	2205	2218	2208	1360
155°	2395	2378	2401	2412	2397	1104
165°	2524	2512	2518	2531	2518	713
175°	2581	2568	2572	2585	2566	246
180°	2576	2576	2576	2576	2576	

TEST NUMBER: P926635

CATALOG NUMBER: DFN2DIP-TR4F0-110D080US950-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4083.3	4083.3	4083.3	4083.3	4083.3
2.5°	4107.0	4087.4	4044.1	4083.3	4075.8
5°	4083.3	4067.9	4024.5	4055.7	4048.3
7.5°	4055.7	4032.5	3989.2	4020.8	4012.9
10°	4012.9	3985.3	3938.3	3969.5	3957.9
12.5°	3953.8	3930.4	3883.4	3902.9	3895.0
15°	3887.1	3863.7	3812.5	3828.3	3808.7
17.5°	3804.6	3781.3	3730.0	3749.6	3730.0
20°	3714.2	3690.8	3635.9	3647.5	3632.2
22.5°	3624.2	3588.8	3537.5	3537.5	3529.6
25°	3518.0	3486.8	3420.1	3427.6	3420.1
27.5°	3400.1	3372.6	3321.7	3310.1	3290.5
30°	3282.6	3250.9	3192.2	3180.5	3164.7
32.5°	3156.8	3133.5	3070.5	3046.8	3031.0
35°	3035.2	2996.0	2933.1	2909.3	2889.8
37.5°	2897.7	2862.3	2799.4	2771.8	2752.3
40°	2756.5	2724.8	2661.9	2626.9	2611.1
42.5°	2619.0	2587.3	2524.9	2485.3	2462.0
45°	2469.9	2442.3	2383.2	2340.4	2324.5
47.5°	2324.5	2297.0	2234.1	2190.8	2167.4
50°	2171.2	2151.7	2096.6	2041.7	2022.1
52.5°	2022.1	1994.5	1943.8	1900.4	1872.9
55°	1869.2	1845.4	1798.4	1751.3	1731.7
57.5°	1715.9	1696.3	1645.1	1597.9	1582.1
60°	1562.6	1547.2	1492.2	1448.8	1437.2
62.5°	1413.4	1386.0	1346.8	1307.6	1291.8
65°	1260.5	1236.8	1197.7	1162.3	1142.7
67.5°	1103.5	1083.6	1048.5	1021.1	1005.2
70°	958.1	942.3	906.9	879.4	863.9
72.5°	809.0	793.2	773.6	746.1	734.4
75°	659.4	652.0	631.9	608.7	616.6
77.5°	526.1	510.3	502.4	490.7	479.1
80°	392.9	388.7	380.7	369.1	361.2
82.5°	267.0	267.0	263.3	247.5	247.5
85°	160.8	157.0	153.3	141.2	137.5
87.5°	70.8	62.9	55.0	43.3	39.1
90°	1.8	22.3	37.2	46.7	50.3
92.5°	46.7	39.2	44.7	48.5	50.3
95°	121.1	59.5	72.6	82.1	80.1
97.5°	218.0	65.3	94.9	100.7	102.5
100°	330.0	74.6	106.3	121.1	124.8
102.5°	452.9	449.2	110.0	130.3	136.1
105°	566.6	622.6	113.7	134.1	141.7
107.5°	698.9	745.4	117.5	137.9	145.4
110°	825.8	864.7	326.3	139.9	147.2

TEST NUMBER: P926635

CATALOG NUMBER: DFN2DIP-TR4F0-110D080US950-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	945.0	978.4	946.8	143.4	149.2
115°	1071.6	1103.3	1150.0	287.1	152.9
117.5°	1181.6	1218.8	1250.7	984.0	495.8
120°	1304.7	1332.5	1366.2	1388.5	1136.9
122.5°	1408.9	1438.8	1476.2	1487.3	1489.3
125°	1515.1	1539.5	1574.9	1587.9	1593.5
127.5°	1612.1	1638.2	1666.4	1684.9	1686.7
130°	1703.5	1733.3	1753.7	1774.3	1772.5
132.5°	1796.7	1821.0	1841.4	1858.2	1856.4
135°	1875.0	1904.9	1921.5	1940.3	1936.5
137.5°	1956.9	1979.3	1998.1	2016.7	2011.1
140°	2037.0	2052.1	2072.5	2089.3	2079.9
142.5°	2104.3	2117.3	2141.4	2156.3	2147.0
145°	2175.1	2173.1	2204.8	2217.9	2208.5
147.5°	2236.5	2230.9	2262.5	2271.9	2264.5
150°	2296.2	2283.1	2313.0	2324.0	2314.8
152.5°	2346.5	2331.6	2359.4	2370.8	2357.7
155°	2394.9	2378.3	2400.6	2411.7	2396.9
157.5°	2434.0	2419.2	2436.0	2449.1	2434.0
160°	2467.7	2456.5	2467.7	2478.8	2465.7
162.5°	2497.4	2486.3	2495.6	2508.6	2491.8
165°	2523.5	2512.5	2518.0	2531.0	2518.0
167.5°	2544.0	2532.8	2538.5	2551.6	2534.8
170°	2560.9	2549.6	2553.4	2566.5	2549.6
172.5°	2572.0	2560.9	2564.6	2577.7	2560.9
175°	2581.2	2568.2	2572.0	2585.0	2566.5
177.5°	2585.0	2572.0	2573.9	2587.0	2570.2
180°	2575.7	2575.7	2575.7	2575.7	2575.7

TEST NUMBER: P926635

CATALOG NUMBER: DFN2DIP-TR4F0-110D080US950-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.06	12.99	12.94	13.90	15.05	11.62	12.56	12.51	13.47	14.62
	3H	13.72	14.56	14.62	15.48	16.66	13.25	14.09	14.15	15.01	16.18
	4H	14.31	15.11	15.23	16.03	17.22	13.84	14.63	14.75	15.56	16.74
	6H	14.72	15.45	15.64	16.38	17.58	14.24	14.97	15.17	15.90	17.10
	8H	14.82	15.52	15.76	16.47	17.67	14.35	15.05	15.28	15.99	17.19
	12H	14.87	15.54	15.81	16.48	17.70	14.39	15.06	15.33	16.00	17.22
4H	2H	12.53	13.32	13.45	14.24	15.43	12.18	12.98	13.10	13.90	15.09
	3H	14.40	15.06	15.33	16.02	17.22	14.01	14.67	14.94	15.62	16.83
	4H	15.12	15.72	16.06	16.67	17.90	14.71	15.32	15.65	16.26	17.49
	6H	15.64	16.16	16.59	17.13	18.36	15.23	15.75	16.18	16.72	17.95
	8H	15.79	16.28	16.74	17.24	18.48	15.38	15.86	16.33	16.83	18.07
	12H	15.86	16.31	16.84	17.29	18.53	15.44	15.88	16.42	16.87	18.11
8H	4H	15.32	15.81	16.28	16.77	18.02	14.96	15.45	15.91	16.41	17.65
	6H	15.95	16.36	16.94	17.37	18.61	15.59	16.00	16.57	17.00	18.24
	8H	16.18	16.53	17.17	17.53	18.79	15.81	16.16	16.80	17.16	18.42
	12H	16.31	16.63	17.30	17.61	18.92	15.93	16.24	16.92	17.23	18.54
12H	4H	15.31	15.75	16.28	16.73	17.98	14.96	15.40	15.93	16.38	17.63
	6H	15.98	16.34	16.97	17.34	18.60	15.63	15.99	16.62	16.99	18.24
	8H	16.23	16.55	17.22	17.53	18.84	15.87	16.19	16.87	17.18	18.48