

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926641

Luminaire Tested: DFN2DIP-TR4F0-110D090US950-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P926641
REPORT IS A COMBINATION OF REPORTS P901994 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-110D090US950-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17420.0 lumens
Efficiency: N/A
Efficacy: 96.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 180.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926641

CATALOG NUMBER: DFN2DIP-TR4F0-110D090US950-RLLONL

Luminous Intensity Polar Plot

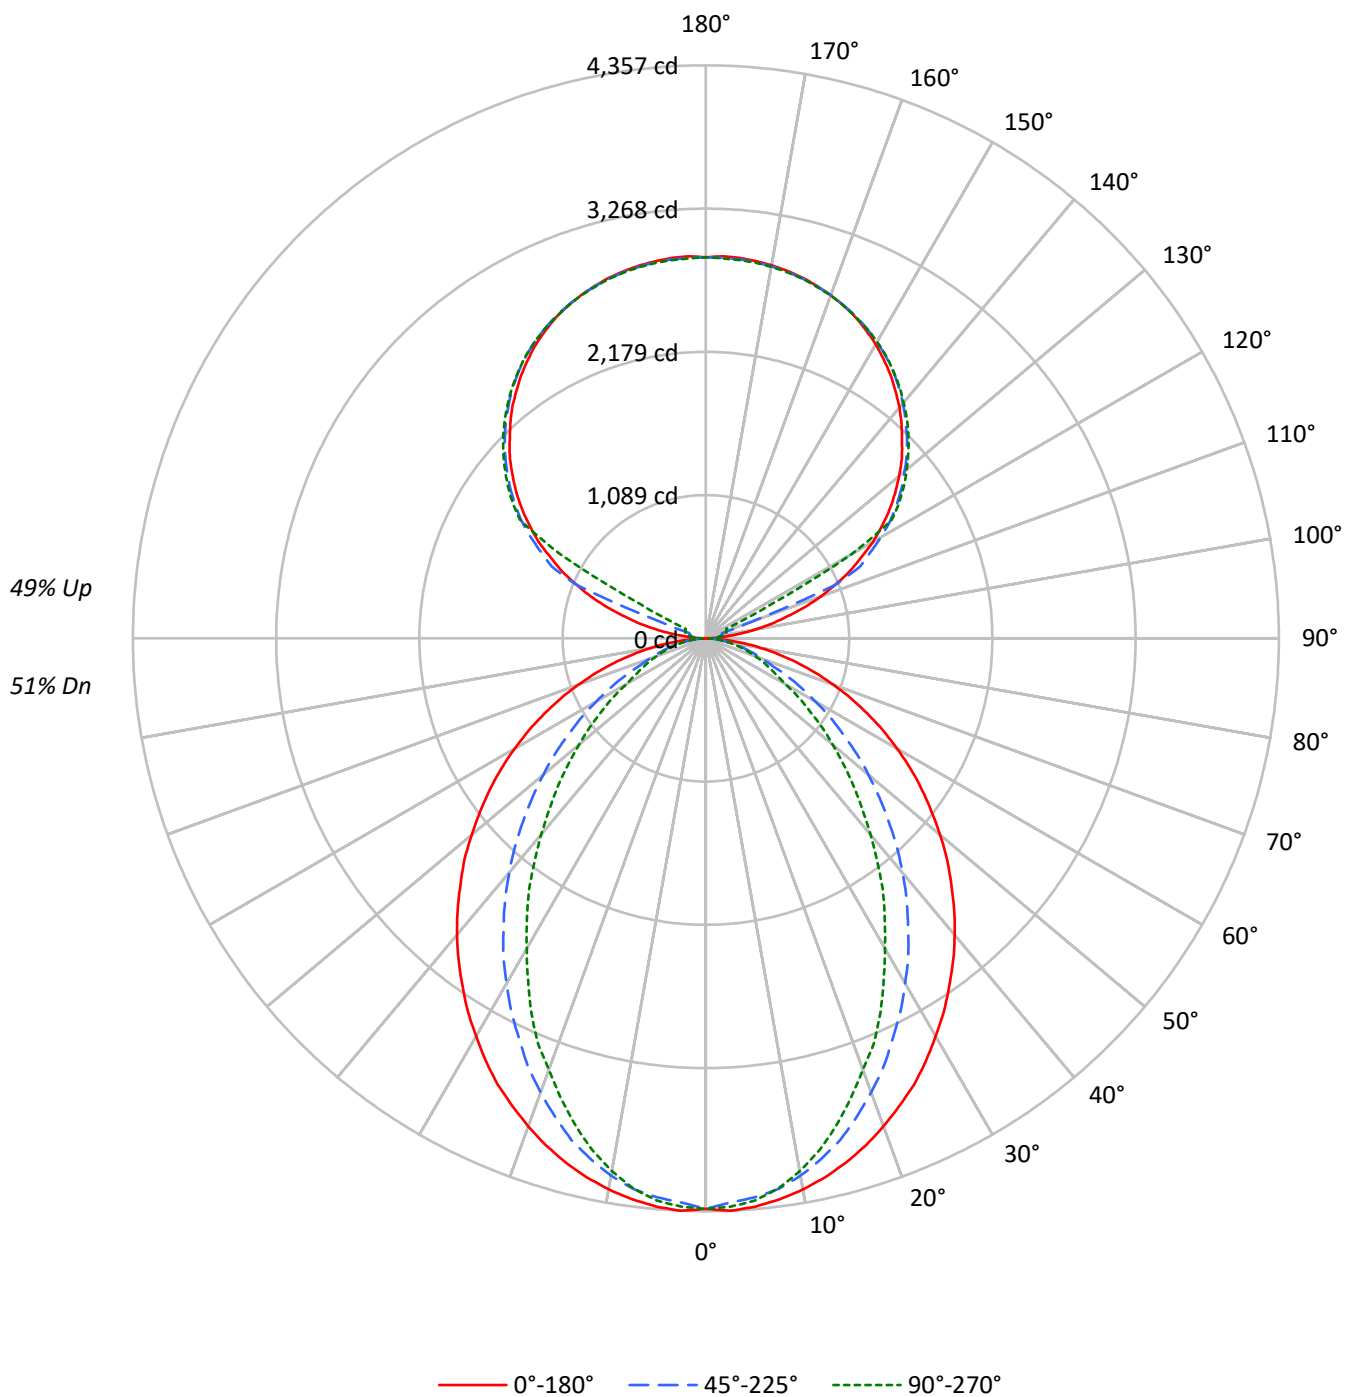

TEST NUMBER: P926641

CATALOG NUMBER: DFN2DIP-TR4F0-110D090US950-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57
1	99	94	91	87	91	87	84	81	74	72	70	62	61	59	51	50	49
2	90	83	77	72	83	77	72	68	66	62	59	55	53	50	46	44	42
3	83	73	66	61	76	68	62	57	58	54	50	49	46	43	41	39	37
4	76	65	58	52	70	61	54	49	52	47	43	44	41	37	37	34	32
5	70	58	51	45	64	54	48	42	47	42	37	40	36	33	34	31	28
6	64	53	45	39	59	49	42	37	43	37	33	36	32	29	31	27	25
7	60	48	40	34	55	45	38	33	39	33	29	33	29	26	28	25	22
8	55	43	36	31	51	41	34	29	35	30	26	31	26	23	26	23	20
9	52	40	32	27	48	37	31	26	33	27	24	28	24	21	24	21	18
10	48	37	29	25	45	34	28	24	30	25	21	26	22	19	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3446	3446	3446
5°	3451	3391	3413
10°	3417	3324	3301
15°	3370	3214	3130
20°	3308	3063	2919
25°	3244	2893	2715
30°	3159	2719	2457
35°	3075	2532	2231
40°	2989	2338	1971
45°	2890	2123	1735
50°	2788	1906	1505
55°	2681	1675	1284
60°	2557	1432	1057
65°	2415	1186	951
70°	2242	956	861
75°	2025	843	783
80°	1711	707	679
85°	1193	471	509

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2890 cd/sqm

TEST NUMBER: P926641

CATALOG NUMBER: DFN2DIP-TR4F0-110D090US950-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	406.5	2.3
10°-20°	1115.9	6.4
20°-30°	1566.7	9.0
30°-40°	1707.7	9.8
40°-50°	1569.6	9.0
50°-60°	1232.7	7.1
60°-70°	802.4	4.6
70°-80°	413.0	2.4
80°-90°	110.5	0.6
90°-100°	95.6	0.5
100°-110°	356.2	2.0
110°-120°	944.7	5.4
120°-130°	1566.8	9.0
130°-140°	1664.3	9.6
140°-150°	1546.8	8.9
150°-160°	1243.6	7.1
160°-170°	801.3	4.6
170°-180°	275.8	1.6
0°-30°	3089.0	17.7
0°-40°	4796.8	27.5
0°-60°	7599.1	43.6
0°-90°	8925.0	51.2
90°-120°	1396.4	8.0
90°-150°	6174.3	35.4
90°-180°	8495.0	48.8
0°-180°	17420.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4337	4337	4337	4337	4337	
5°	4337	4318	4266	4302	4290	411
15°	4125	4082	3949	3874	3835	1162
25°	3744	3619	3360	3199	3140	1722
35°	3226	3026	2681	2434	2347	2019
45°	2638	2374	1963	1684	1590	2037
55°	2006	1700	1276	1040	966	1792
65°	1354	1036	683	550	538	1343
75°	722	447	314	286	283	764
85°	169	86	74	74	74	194
90°	2	25	42	53	56	16
95°	136	67	82	92	90	161
105°	637	700	128	151	159	681
115°	1206	1241	1294	323	172	1187
125°	1704	1732	1772	1786	1793	1520
135°	2109	2143	2162	2183	2179	1629
145°	2447	2445	2480	2495	2485	1530
155°	2694	2676	2701	2713	2696	1242
165°	2839	2826	2833	2847	2833	802
175°	2904	2889	2894	2908	2887	276
180°	2898	2898	2898	2898	2898	

TEST NUMBER: P926641

CATALOG NUMBER: DFN2DIP-TR4F0-110D090US950-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4337.2	4337.2	4337.2	4337.2	4337.2
2.5°	4356.7	4337.2	4293.9	4333.4	4325.5
5°	4337.2	4317.6	4266.4	4301.8	4290.1
7.5°	4301.8	4278.4	4223.5	4238.9	4219.3
10°	4254.7	4227.2	4148.9	4136.8	4113.6
12.5°	4196.0	4160.6	4054.4	4031.0	3987.7
15°	4125.2	4081.9	3948.6	3874.1	3834.9
17.5°	4042.8	3979.9	3815.0	3728.7	3665.8
20°	3948.6	3869.9	3673.8	3575.9	3489.3
22.5°	3846.6	3756.2	3528.5	3395.2	3336.4
25°	3744.5	3618.8	3359.8	3199.0	3139.9
27.5°	3623.0	3489.3	3202.8	3018.3	2927.9
30°	3493.5	3344.0	3030.0	2830.0	2723.9
32.5°	3367.7	3186.9	2865.4	2629.8	2531.5
35°	3226.5	3026.2	2681.0	2433.7	2347.0
37.5°	3089.1	2873.0	2508.2	2237.0	2139.2
40°	2943.8	2708.5	2327.5	2048.8	1946.8
42.5°	2794.6	2543.6	2147.2	1856.5	1758.6
45°	2637.7	2374.5	1962.7	1683.6	1589.6
47.5°	2488.6	2210.0	1786.1	1507.0	1420.9
50°	2323.7	2045.1	1613.3	1342.2	1260.1
52.5°	2162.5	1868.1	1448.4	1189.4	1114.7
55°	2005.5	1699.5	1275.5	1040.2	965.7
57.5°	1844.8	1530.8	1122.7	902.9	839.9
60°	1679.9	1365.9	961.5	761.7	698.8
62.5°	1519.1	1205.2	824.2	635.9	604.6
65°	1354.2	1036.0	683.0	549.7	537.6
67.5°	1197.3	879.1	549.7	482.6	471.0
70°	1032.3	726.3	455.2	416.0	400.2
72.5°	875.3	584.7	380.6	349.4	341.4
75°	722.1	447.2	314.0	286.5	282.8
77.5°	569.3	317.8	247.4	231.5	223.6
80°	427.7	227.8	188.2	172.9	172.9
82.5°	298.1	153.2	129.6	121.6	121.6
85°	168.7	86.2	74.5	74.5	74.5
87.5°	62.9	31.2	31.2	27.5	27.5
90°	2.0	25.2	41.8	52.6	56.5
92.5°	52.6	44.1	50.3	54.6	56.5
95°	136.2	67.0	81.7	92.3	90.2
97.5°	245.3	73.5	106.8	113.2	115.2
100°	371.2	84.0	119.5	136.2	140.4
102.5°	509.4	505.4	123.7	146.6	153.1
105°	637.4	700.4	127.9	150.9	159.3
107.5°	786.3	838.6	132.2	155.1	163.6
110°	928.9	972.8	367.0	157.3	165.6

TEST NUMBER: P926641

CATALOG NUMBER: DFN2DIP-TR4F0-110D090US950-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1063.1	1100.7	1065.1	161.3	167.8
115°	1205.6	1241.2	1293.7	322.9	172.0
117.5°	1329.3	1371.2	1407.0	1107.0	557.7
120°	1467.7	1499.1	1537.0	1562.1	1279.0
122.5°	1585.1	1618.7	1660.7	1673.1	1675.4
125°	1704.5	1731.9	1771.8	1786.5	1792.7
127.5°	1813.6	1842.9	1874.6	1895.5	1897.5
130°	1916.4	1950.1	1973.0	1996.1	1994.1
132.5°	2021.2	2048.6	2071.5	2090.5	2088.5
135°	2109.4	2143.0	2161.7	2182.8	2178.6
137.5°	2201.5	2226.6	2247.8	2268.7	2262.5
140°	2291.6	2308.6	2331.5	2350.4	2340.0
142.5°	2367.4	2382.0	2409.1	2425.8	2415.4
145°	2447.0	2444.7	2480.4	2495.1	2484.6
147.5°	2516.0	2509.8	2545.4	2555.9	2547.6
150°	2583.2	2568.5	2602.1	2614.5	2604.1
152.5°	2639.7	2623.0	2654.4	2667.1	2652.4
155°	2694.3	2675.6	2700.7	2713.2	2696.5
157.5°	2738.4	2721.7	2740.6	2755.2	2738.4
160°	2776.1	2763.5	2776.1	2788.6	2773.9
162.5°	2809.5	2797.0	2807.5	2822.2	2803.3
165°	2838.9	2826.4	2832.7	2847.4	2832.7
167.5°	2862.1	2849.4	2855.8	2870.5	2851.6
170°	2881.0	2868.3	2872.5	2887.2	2868.3
172.5°	2893.5	2881.0	2885.2	2899.9	2881.0
175°	2903.9	2889.2	2893.5	2908.1	2887.2
177.5°	2908.1	2893.5	2895.7	2910.4	2891.5
180°	2897.7	2897.7	2897.7	2897.7	2897.7

TEST NUMBER: P926641

CATALOG NUMBER: DFN2DIP-TR4F0-110D090US950-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.55	12.40	12.51	13.36	14.62	7.53	8.37	8.48	9.33	10.59
	3H	13.23	13.98	14.20	14.96	16.24	8.72	9.47	9.68	10.44	11.72
	4H	13.84	14.55	14.82	15.53	16.82	9.17	9.88	10.15	10.86	12.15
	6H	14.26	14.92	15.25	15.90	17.20	9.49	10.15	10.48	11.13	12.43
	8H	14.39	15.01	15.39	16.01	17.31	9.58	10.21	10.58	11.21	12.50
	12H	14.45	15.04	15.45	16.04	17.36	9.63	10.22	10.63	11.21	12.53
4H	2H	11.57	12.28	12.56	13.26	14.55	8.13	8.84	9.11	9.81	11.10
	3H	13.40	13.99	14.40	15.00	16.30	9.48	10.07	10.47	11.07	12.38
	4H	14.10	14.64	15.10	15.64	16.96	10.03	10.57	11.03	11.57	12.89
	6H	14.61	15.08	15.63	16.10	17.42	10.45	10.91	11.46	11.93	13.26
	8H	14.79	15.22	15.80	16.24	17.57	10.58	11.01	11.59	12.03	13.36
	12H	14.88	15.27	15.92	16.31	17.65	10.64	11.03	11.68	12.07	13.41
8H	4H	14.07	14.50	15.08	15.51	16.85	10.31	10.74	11.32	11.76	13.09
	6H	14.63	14.99	15.67	16.05	17.38	10.83	11.18	11.87	12.24	13.58
	8H	14.85	15.16	15.90	16.21	17.56	11.02	11.33	12.07	12.38	13.73
	12H	14.99	15.26	16.04	16.30	17.70	11.14	11.42	12.19	12.45	13.85
12H	4H	14.02	14.41	15.05	15.44	16.78	10.31	10.70	11.34	11.73	13.08
	6H	14.61	14.92	15.65	15.97	17.32	10.88	11.19	11.92	12.24	13.59
	8H	14.83	15.11	15.88	16.14	17.54	11.09	11.36	12.14	12.40	13.80