

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926665

Luminaire Tested: DFN2DIP-TR4F0-120D060US950-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P926665
REPORT IS A COMBINATION OF REPORTS P901942 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-120D060US950-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15397.5 lumens
Efficiency: N/A
Efficacy: 90.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 170.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9821
Total Harmonic Distortion (THDi): 0.08
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926665

CATALOG NUMBER: DFN2DIP-TR4F0-120D060US950-RLLONL

Luminous Intensity Polar Plot

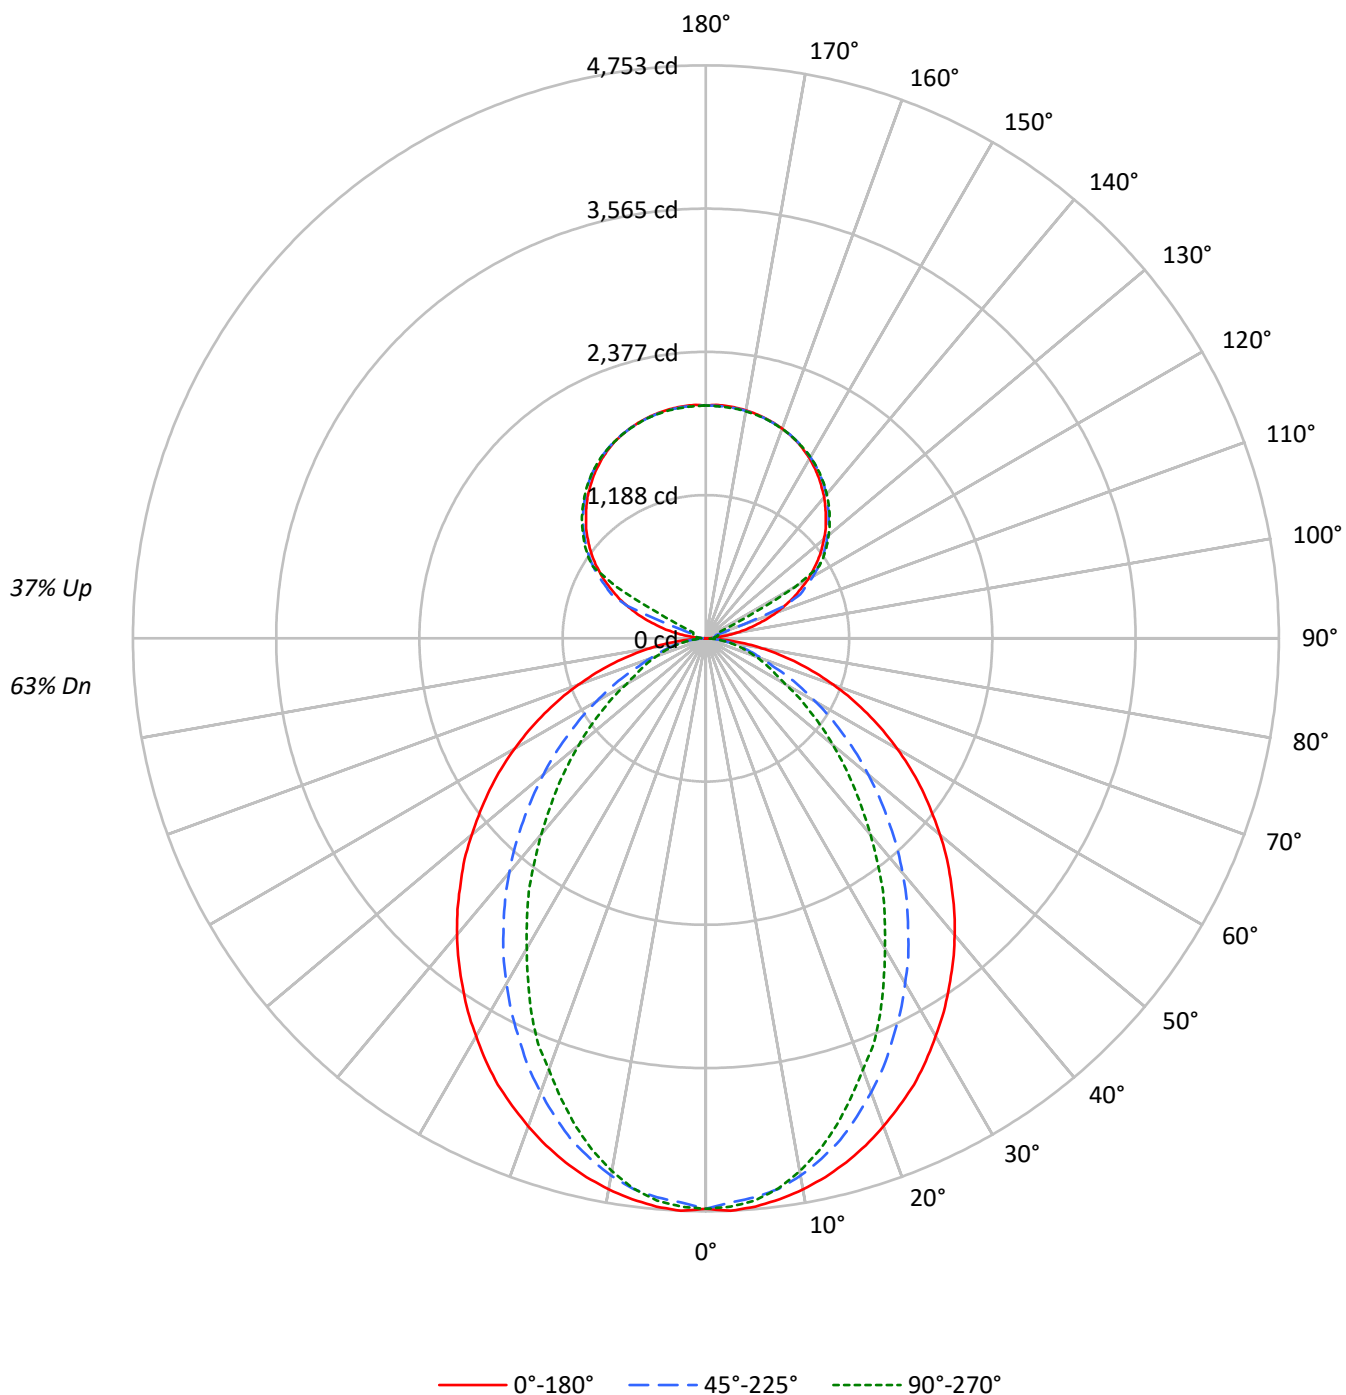

TEST NUMBER: P926665

CATALOG NUMBER: DFN2DIP-TR4F0-120D060US950-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68
1	101	97	93	90	95	91	88	85	80	78	76	71	69	67	61	60	59
2	93	86	80	75	87	81	75	71	71	67	64	63	60	57	55	52	51
3	85	76	69	63	80	72	65	60	63	58	54	56	52	49	49	46	44
4	78	68	60	54	73	64	57	52	57	51	47	50	46	43	44	41	38
5	72	61	53	47	67	57	50	45	51	45	41	46	41	37	40	37	34
6	67	55	47	41	62	52	45	39	46	41	36	41	37	33	37	33	30
7	62	50	42	36	58	47	40	35	42	36	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	24
9	54	42	34	29	51	40	33	28	36	30	26	32	27	24	29	25	22
10	50	38	31	26	47	37	30	25	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3759	3759	3759
5°	3765	3699	3723
10°	3728	3627	3601
15°	3676	3507	3414
20°	3609	3341	3184
25°	3539	3156	2962
30°	3446	2966	2681
35°	3354	2762	2433
40°	3261	2551	2150
45°	3153	2316	1893
50°	3041	2080	1642
55°	2925	1827	1401
60°	2790	1562	1153
65°	2634	1294	1038
70°	2446	1043	939
75°	2209	919	854
80°	1867	771	740
85°	1301	515	556

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3153 cd/sqm

TEST NUMBER: P926665

CATALOG NUMBER: DFN2DIP-TR4F0-120D060US950-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	443.4	2.9
10°-20°	1217.3	7.9
20°-30°	1709.1	11.1
30°-40°	1863.0	12.1
40°-50°	1712.3	11.1
50°-60°	1344.7	8.7
60°-70°	875.3	5.7
70°-80°	450.6	2.9
80°-90°	118.4	0.8
90°-100°	63.7	0.4
100°-110°	237.5	1.5
110°-120°	629.8	4.1
120°-130°	1044.5	6.8
130°-140°	1109.5	7.2
140°-150°	1031.2	6.7
150°-160°	829.1	5.4
160°-170°	534.2	3.5
170°-180°	183.9	1.2
0°-30°	3369.8	21.9
0°-40°	5232.8	34.0
0°-60°	8289.9	53.8
0°-90°	9734.2	63.2
90°-120°	930.9	6.0
90°-150°	4116.2	26.7
90°-180°	5663.0	36.8
0°-180°	15397.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4732	4732	4732	4732	4732	
5°	4732	4710	4654	4693	4680	449
15°	4500	4453	4308	4226	4184	1268
25°	4085	3948	3665	3490	3425	1879
35°	3520	3301	2925	2655	2560	2203
45°	2878	2590	2141	1837	1734	2222
55°	2188	1854	1392	1135	1054	1955
65°	1477	1130	745	600	586	1465
75°	788	488	343	312	308	833
85°	184	94	81	81	81	211
90°	1	17	28	35	38	15
95°	91	45	54	62	60	108
105°	425	467	85	101	106	454
115°	804	828	862	215	115	791
125°	1136	1155	1181	1191	1195	1014
135°	1406	1429	1441	1455	1452	1086
145°	1631	1630	1654	1663	1656	1020
155°	1796	1784	1800	1809	1798	828
165°	1893	1884	1888	1898	1888	535
175°	1936	1926	1929	1939	1925	184
180°	1932	1932	1932	1932	1932	

TEST NUMBER: P926665

CATALOG NUMBER: DFN2DIP-TR4F0-120D060US950-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4731.5	4731.5	4731.5	4731.5	4731.5
2.5°	4752.8	4731.5	4684.2	4727.4	4718.7
5°	4731.5	4710.1	4654.2	4692.8	4680.1
7.5°	4692.8	4667.3	4607.4	4624.2	4602.9
10°	4641.5	4611.5	4526.1	4512.9	4487.5
12.5°	4577.4	4538.8	4422.9	4397.6	4350.3
15°	4500.2	4453.0	4307.6	4226.2	4183.6
17.5°	4410.2	4341.7	4161.7	4067.8	3999.2
20°	4307.6	4221.7	4007.8	3901.0	3806.5
22.5°	4196.3	4097.7	3849.2	3703.8	3639.8
25°	4085.0	3947.7	3665.2	3489.8	3425.3
27.5°	3952.3	3806.5	3493.9	3292.7	3194.1
30°	3811.0	3648.0	3305.4	3087.3	2971.5
32.5°	3673.9	3476.7	3126.0	2868.9	2761.6
35°	3519.9	3301.3	2924.7	2654.9	2560.3
37.5°	3369.9	3134.2	2736.2	2440.4	2333.7
40°	3211.4	2954.7	2539.1	2235.1	2123.8
42.5°	3048.7	2774.8	2342.4	2025.2	1918.5
45°	2877.5	2590.4	2141.1	1836.7	1734.0
47.5°	2714.8	2410.9	1948.4	1644.1	1550.1
50°	2535.0	2231.0	1759.9	1464.2	1374.7
52.5°	2359.1	2037.9	1580.0	1297.4	1216.2
55°	2187.9	1854.0	1391.5	1134.8	1053.5
57.5°	2012.5	1670.0	1224.7	984.9	916.3
60°	1832.6	1490.1	1048.9	830.9	762.3
62.5°	1657.3	1314.7	899.0	693.7	659.6
65°	1477.4	1130.3	745.1	599.7	586.5
67.5°	1306.1	959.0	599.7	526.5	513.8
70°	1126.2	792.3	496.6	453.8	436.6
72.5°	955.0	637.8	415.2	381.1	372.5
75°	787.7	487.9	342.6	312.5	308.4
77.5°	621.1	346.6	269.9	252.6	243.9
80°	466.6	248.5	205.3	188.5	188.5
82.5°	325.3	167.1	141.3	132.6	132.6
85°	184.0	94.1	81.3	81.3	81.3
87.5°	68.6	34.1	34.1	30.0	30.0
90°	1.3	16.8	27.9	35.0	37.7
92.5°	35.0	29.4	33.5	36.3	37.7
95°	90.8	44.6	54.5	61.6	60.1
97.5°	163.5	48.9	71.2	75.6	76.9
100°	247.5	55.9	79.7	90.8	93.6
102.5°	339.6	337.0	82.5	97.8	102.1
105°	424.9	466.9	85.3	100.6	106.3
107.5°	524.2	559.0	88.1	103.4	109.0
110°	619.3	648.5	244.7	104.9	110.4



TEST NUMBER: P926665

CATALOG NUMBER: DFN2DIP-TR4F0-120D060US950-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	708.7	733.8	710.1	107.5	111.9
115°	803.7	827.5	862.5	215.3	114.7
117.5°	886.2	914.1	938.0	738.0	371.8
120°	978.5	999.4	1024.7	1041.4	852.7
122.5°	1056.7	1079.1	1107.1	1115.4	1116.9
125°	1136.4	1154.6	1181.1	1191.0	1195.1
127.5°	1209.1	1228.7	1249.7	1263.7	1265.0
130°	1277.6	1300.0	1315.3	1330.7	1329.4
132.5°	1347.5	1365.7	1381.0	1393.6	1392.3
135°	1406.3	1428.7	1441.1	1455.2	1452.4
137.5°	1467.6	1484.4	1498.5	1512.5	1508.4
140°	1527.7	1539.1	1554.4	1566.9	1560.0
142.5°	1578.2	1588.0	1606.2	1617.2	1610.3
145°	1631.3	1629.8	1653.6	1663.4	1656.4
147.5°	1677.3	1673.1	1696.9	1703.8	1698.4
150°	1722.2	1712.3	1734.8	1743.1	1736.1
152.5°	1759.8	1748.7	1769.6	1778.1	1768.2
155°	1796.2	1783.7	1800.5	1808.8	1797.6
157.5°	1825.6	1814.4	1827.0	1836.8	1825.6
160°	1850.8	1842.3	1850.8	1859.1	1849.3
162.5°	1873.0	1864.7	1871.7	1881.5	1868.9
165°	1892.6	1884.3	1888.4	1898.3	1888.4
167.5°	1908.0	1899.6	1903.9	1913.7	1901.0
170°	1920.7	1912.2	1915.1	1924.8	1912.2
172.5°	1929.0	1920.7	1923.5	1933.3	1920.7
175°	1936.0	1926.1	1929.0	1938.7	1924.8
177.5°	1938.7	1929.0	1930.4	1940.2	1927.7
180°	1931.8	1931.8	1931.8	1931.8	1931.8

TEST NUMBER: P926665

CATALOG NUMBER: DFN2DIP-TR4F0-120D060US950-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.89	13.85	13.74	14.70	15.78	8.87	9.82	9.71	10.68	11.75
	3H	14.58	15.43	15.44	16.30	17.40	10.07	10.92	10.92	11.79	12.89
	4H	15.20	16.00	16.07	16.87	17.98	10.52	11.33	11.39	12.20	13.31
	6H	15.62	16.36	16.51	17.24	18.37	10.85	11.59	11.73	12.47	13.60
	8H	15.75	16.46	16.64	17.36	18.48	10.95	11.65	11.84	12.55	13.67
	12H	15.82	16.49	16.71	17.38	18.53	10.99	11.66	11.89	12.56	13.70
4H	2H	12.93	13.73	13.80	14.61	15.72	9.48	10.28	10.35	11.16	12.27
	3H	14.77	15.43	15.65	16.34	17.47	10.84	11.51	11.73	12.41	13.54
	4H	15.46	16.07	16.36	16.97	18.13	11.39	12.00	12.29	12.90	14.06
	6H	15.99	16.51	16.90	17.44	18.59	11.82	12.34	12.73	13.27	14.42
	8H	16.16	16.65	17.08	17.57	18.74	11.95	12.44	12.87	13.36	14.53
	12H	16.26	16.70	17.20	17.64	18.81	12.02	12.46	12.96	13.40	14.57
8H	4H	15.44	15.93	16.36	16.85	18.02	11.68	12.17	12.60	13.09	14.26
	6H	16.01	16.41	16.95	17.38	18.54	12.21	12.61	13.15	13.57	14.74
	8H	16.23	16.59	17.18	17.54	18.72	12.40	12.75	13.35	13.71	14.89
	12H	16.37	16.69	17.33	17.63	18.87	12.52	12.84	13.48	13.78	15.02
12H	4H	15.40	15.84	16.33	16.78	17.95	11.69	12.13	12.63	13.07	14.24
	6H	15.99	16.34	16.94	17.30	18.48	12.26	12.61	13.21	13.57	14.75
	8H	16.21	16.53	17.17	17.47	18.71	12.47	12.79	13.43	13.73	14.97