

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331900-830

Luminaire Tested: **S123DIP-S340D1025U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331900-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S340D1025U830-4F0-1E-UDD-F4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4829.3 lumens  
Efficiency: N/A  
Efficacy: 129.5 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 37.3  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331900-830

CATALOG NUMBER: S123DIP-S340D1025U830-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

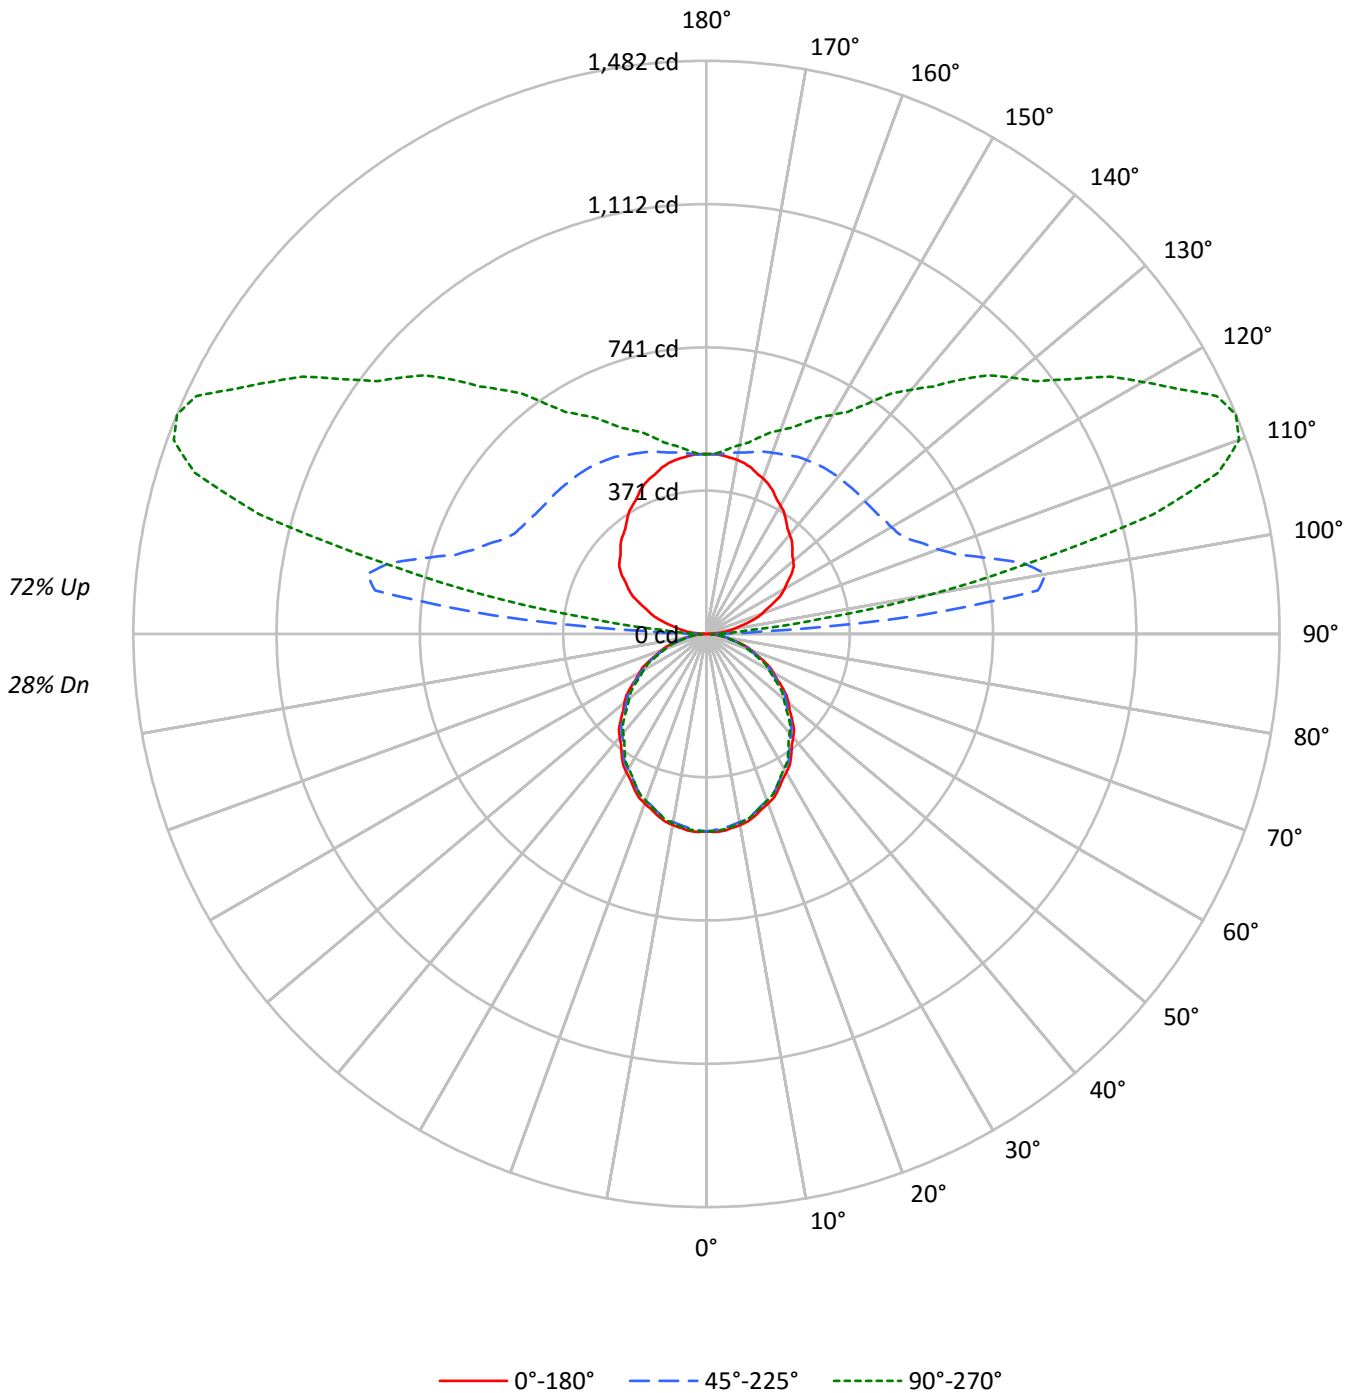



TEST NUMBER: P331900-830

CATALOG NUMBER: S123DIP-S340D1025U830-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	52	52	52	36	36	36	28
1	93	89	85	81	83	79	76	73	62	60	58	46	45	43	31	31	30	23
2	84	77	71	66	75	69	64	60	54	51	48	40	38	36	27	26	25	19
3	77	68	61	55	68	61	55	50	48	44	40	36	33	31	24	23	21	16
4	70	60	52	46	63	54	47	42	42	38	34	32	29	26	22	20	18	14
5	64	53	45	40	57	48	41	36	38	33	29	28	25	22	20	18	16	12
6	59	48	40	34	53	43	36	31	34	29	25	26	22	20	18	16	14	11
7	55	43	35	30	49	39	32	27	31	26	22	23	20	17	16	14	12	9
8	51	39	31	26	45	35	28	24	28	23	20	21	18	15	15	13	11	8
9	47	35	28	23	42	32	25	21	25	21	17	19	16	14	14	11	10	8
10	44	32	25	21	39	29	23	19	23	19	16	18	15	12	13	11	9	7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5498	5498	5498
5°	5524	5448	5486
10°	5487	5400	5434
15°	5422	5340	5349
20°	5347	5252	5257
25°	5247	5149	5138
30°	5137	5033	4994
35°	5021	4911	4847
40°	4900	4776	4703
45°	4766	4654	4539
50°	4632	4501	4376
55°	4459	4344	4211
60°	4284	4159	4028
65°	4126	3958	3836
70°	3899	3733	3566
75°	3564	3435	3290
80°	3211	3081	3050
85°	2816	2717	2606



TEST NUMBER: P331900-830

CATALOG NUMBER: S123DIP-S340D1025U830-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	48.1	1.0
10°-20°	135.9	2.8
20°-30°	200.7	4.2
30°-40°	234.4	4.9
40°-50°	235.7	4.9
50°-60°	207.0	4.3
60°-70°	154.2	3.2
70°-80°	87.9	1.8
80°-90°	28.8	0.6
90°-100°	258.6	5.4
100°-110°	732.4	15.2
110°-120°	720.5	14.9
120°-130°	574.7	11.9
130°-140°	453.1	9.4
140°-150°	338.2	7.0
150°-160°	235.7	4.9
160°-170°	138.5	2.9
170°-180°	45.1	0.9
0°-30°	384.6	8.0
0°-40°	619.1	12.8
0°-60°	1061.7	22.0
0°-90°	1332.7	27.6
90°-120°	1711.5	35.4
90°-150°	3077.4	63.7
90°-180°	3497.0	72.4
0°-180°	4829.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	511	511	511	511	511	
5°	511	509	504	508	508	48
15°	487	485	479	482	480	137
25°	442	439	434	434	433	203
35°	382	379	374	371	369	239
45°	313	311	306	301	298	242
55°	238	237	232	227	224	213
65°	162	160	155	152	151	160
75°	86	84	83	80	79	92
85°	23	22	22	21	21	25
90°	2	11	24	26	27	3
95°	32	104	558	163	109	35
105°	109	161	756	1323	1197	116
115°	193	240	579	1269	1456	191
125°	268	317	540	978	1148	238
135°	314	375	532	806	930	243
145°	358	411	526	661	727	225
155°	407	439	509	579	603	187
165°	445	458	487	517	526	125
175°	464	464	468	474	473	44
180°	465	465	465	465	465	



TEST NUMBER: P331900-830

CATALOG NUMBER: S123DIP-S340D1025U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	510.8	510.8	510.8	510.8	510.8	510.8	510.8	510.8	510.8	510.8	510.8
2.5°	512.6	512.2	511.9	511.6	511.2	510.7	509.8	509.0	508.1	507.3	508.0
5°	511.2	510.7	510.2	509.7	509.3	508.5	507.4	506.3	505.2	504.2	505.1
7.5°	506.2	505.7	505.2	504.7	504.3	503.4	502.4	501.2	500.1	499.0	499.8
10°	502.0	501.5	501.0	500.5	500.0	499.2	497.9	496.6	495.3	494.1	494.9
12.5°	496.3	496.0	495.5	495.1	494.7	493.9	492.8	491.5	490.3	489.2	489.8
15°	486.6	486.3	485.8	485.4	485.0	484.2	483.0	481.6	480.4	479.2	479.9
17.5°	475.2	474.8	474.3	473.7	473.3	472.4	471.1	469.9	468.5	467.3	467.8
20°	466.8	466.3	465.7	465.1	464.5	463.5	462.3	461.0	459.8	458.5	458.9
22.5°	457.3	456.8	456.2	455.6	455.1	454.1	452.8	451.6	450.3	449.0	449.3
25°	441.8	441.2	440.6	440.1	439.5	438.6	437.2	436.0	434.7	433.5	433.6
27.5°	425.2	424.6	424.0	423.5	422.9	422.0	420.7	419.2	417.9	416.5	416.6
30°	413.3	412.7	412.3	411.8	411.3	410.4	409.1	407.6	406.3	404.9	404.9
32.5°	401.3	400.7	400.0	399.4	398.8	397.8	396.8	395.8	394.7	393.7	393.1
35°	382.1	381.5	380.9	380.3	379.8	378.8	377.6	376.3	375.0	373.7	373.2
37.5°	362.4	361.7	360.9	360.1	359.5	358.4	357.1	355.8	354.6	353.3	352.6
40°	348.7	348.1	347.5	346.9	346.4	345.3	344.0	342.6	341.3	339.9	339.1
42.5°	335.0	334.3	333.7	333.0	332.3	331.3	330.0	328.6	327.3	325.8	325.1
45°	313.1	312.7	312.4	312.0	311.6	310.8	309.4	308.2	306.9	305.7	304.5
47.5°	291.4	290.9	290.3	289.7	289.2	288.3	287.1	285.9	284.7	283.5	282.4
50°	276.6	276.2	275.7	275.2	274.8	273.8	272.6	271.4	270.0	268.8	267.7
52.5°	261.2	260.9	260.5	260.2	259.9	259.0	257.7	256.4	255.1	253.6	252.8
55°	237.6	237.5	237.4	237.3	237.2	236.5	235.3	233.9	232.7	231.5	230.4
57.5°	215.1	214.8	214.4	214.1	213.8	213.1	212.1	211.0	210.1	209.1	208.1
60°	199.0	198.9	198.8	198.7	198.6	197.9	196.7	195.6	194.4	193.2	192.4
62.5°	184.5	184.3	184.1	183.8	183.5	182.9	181.6	180.5	179.3	178.1	177.3
65°	162.0	161.6	161.1	160.6	160.1	159.4	158.4	157.4	156.5	155.4	154.7
67.5°	138.3	137.8	137.4	137.0	136.6	135.9	135.3	134.5	133.7	133.0	132.3
70°	123.9	123.3	122.7	122.1	121.5	120.9	120.4	119.7	119.1	118.6	117.9
72.5°	108.8	108.3	107.9	107.4	107.0	106.5	105.8	105.2	104.5	103.9	103.2
75°	85.7	85.2	84.8	84.5	84.1	83.7	83.4	83.1	82.8	82.6	82.1
77.5°	65.1	64.9	64.8	64.6	64.3	64.0	63.7	63.3	63.0	62.6	62.3
80°	51.8	51.6	51.3	51.0	50.6	50.4	50.2	50.0	49.9	49.7	49.5
82.5°	38.8	38.7	38.7	38.6	38.5	38.5	38.5	38.5	38.5	38.4	38.2
85°	22.8	22.6	22.4	22.2	22.1	22.0	22.0	22.0	22.0	22.0	21.8
87.5°	9.5	9.6	9.8	10.1	10.3	10.5	10.9	11.5	12.0	12.4	12.2
90°	1.9	3.8	5.7	8.5	10.4	12.3	15.1	17.9	20.7	23.6	22.6
92.5°	11.7	17.3	25.3	32.5	40.4	54.4	79.0	119.5	159.2	144.7	109.1
95°	32.0	34.8	45.1	61.2	85.6	122.3	202.3	342.4	496.7	557.9	452.5
97.5°	54.6	55.5	63.6	77.5	101.6	141.3	217.7	375.8	633.0	864.6	925.0
100°	69.7	70.6	77.2	90.3	112.9	149.6	215.5	354.7	602.1	891.0	1076.3
102.5°	85.4	87.1	92.9	105.4	125.7	159.4	218.5	336.6	556.9	842.1	1083.8
105°	109.1	112.0	117.6	128.9	146.8	176.0	226.8	323.7	501.4	756.4	1026.4
107.5°	134.3	137.1	142.6	153.7	170.5	197.6	242.1	322.7	466.1	680.8	926.0
110°	152.4	155.2	159.9	170.3	186.2	212.6	255.0	326.5	452.5	637.9	862.7



TEST NUMBER: P331900-830

CATALOG NUMBER: S123DIP-S340D1025U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	169.0	171.8	176.5	186.8	202.8	228.5	267.8	334.0	445.0	609.3	807.8
115°	192.8	196.6	202.3	211.7	227.7	253.1	288.8	346.2	442.1	578.6	741.4
117.5°	216.8	221.1	225.8	234.4	252.3	275.9	311.2	362.4	443.8	560.5	701.3
120°	233.3	236.1	240.8	250.2	268.2	291.6	325.6	374.5	446.9	552.2	680.2
122.5°	247.6	250.4	255.1	265.3	282.5	307.5	340.5	385.8	452.1	547.0	662.9
125°	268.2	270.0	275.7	286.0	303.9	329.3	362.2	403.6	460.1	540.1	640.7
127.5°	283.8	286.5	293.5	304.1	323.9	349.2	381.1	418.3	469.1	536.7	621.1
130°	293.5	296.3	304.8	316.1	335.8	361.3	392.3	428.1	475.1	534.4	610.6
132.5°	301.0	304.6	313.9	327.4	347.1	371.8	402.1	437.2	479.7	533.7	600.8
135°	314.2	318.0	328.4	342.4	362.2	387.6	416.8	448.7	486.4	532.5	588.1
137.5°	326.7	330.6	340.7	355.8	375.4	398.9	427.0	457.4	490.9	530.5	576.9
140°	335.0	339.6	349.0	364.1	383.0	406.4	433.8	461.9	493.9	529.7	570.1
142.5°	343.9	347.9	358.1	371.6	390.4	412.5	439.0	466.5	496.2	528.2	564.1
145°	358.4	361.3	369.8	383.9	399.8	421.5	445.9	471.4	497.7	525.9	556.0
147.5°	373.2	374.8	383.1	395.3	410.8	429.2	451.6	474.4	497.7	522.4	548.1
150°	383.0	383.9	391.3	403.6	416.8	433.8	455.3	475.1	497.7	519.3	542.8
152.5°	392.7	392.9	400.4	411.1	422.8	439.0	457.6	476.6	495.4	515.6	536.9
155°	407.4	407.4	413.0	422.4	432.8	445.9	461.9	477.0	492.9	509.0	527.8
157.5°	419.1	419.8	424.3	432.6	441.4	451.6	464.4	478.0	489.8	503.1	517.6
160°	428.1	428.1	431.9	439.3	445.9	455.3	466.7	478.0	488.3	498.6	510.9
162.5°	434.9	434.9	437.9	443.8	449.7	457.6	467.4	477.2	485.3	494.1	504.1
165°	445.0	444.0	445.9	450.6	454.4	461.0	468.5	475.1	480.8	487.4	494.8
167.5°	452.7	451.6	452.5	456.1	458.7	462.9	468.3	473.6	476.3	480.6	486.1
170°	457.2	455.3	456.3	459.1	461.0	462.9	467.6	471.4	473.3	476.1	480.8
172.5°	460.2	459.1	459.3	461.4	462.5	463.6	467.6	470.6	471.0	472.3	475.5
175°	463.8	462.9	461.9	463.8	463.8	464.8	466.7	468.5	467.6	467.6	469.5
177.5°	465.5	464.8	464.0	464.8	464.8	464.8	465.5	467.0	465.5	464.8	465.5
180°	464.8	464.8	464.8	464.8	464.8	464.8	464.8	464.8	464.8	464.8	464.8



TEST NUMBER: P331900-830

CATALOG NUMBER: S123DIP-S340D1025U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	510.8	510.8	510.8	510.8	510.8	510.8	510.8	510.8
2.5°	508.8	509.6	510.4	510.8	510.7	510.6	510.5	510.4
5°	506.1	507.1	508.1	508.5	508.3	508.1	507.8	507.7
7.5°	500.8	501.6	502.5	502.8	502.8	502.7	502.6	502.4
10°	495.9	496.7	497.6	497.9	497.8	497.6	497.4	497.2
12.5°	490.4	491.1	491.7	492.0	491.9	491.7	491.6	491.5
15°	480.7	481.5	482.3	482.4	481.7	481.2	480.6	480.0
17.5°	468.3	468.9	469.5	469.7	469.4	469.2	469.0	468.8
20°	459.3	459.7	460.1	460.1	459.8	459.5	459.2	458.9
22.5°	449.6	450.0	450.3	450.3	449.9	449.5	449.1	448.7
25°	433.7	433.8	433.9	433.8	433.5	433.2	432.9	432.6
27.5°	416.7	416.8	416.8	416.7	416.3	415.9	415.6	415.2
30°	404.9	404.9	404.9	404.5	403.9	403.2	402.6	401.8
32.5°	392.6	392.0	391.5	391.1	390.7	390.3	389.9	389.6
35°	372.6	372.0	371.4	370.9	370.4	369.9	369.4	368.9
37.5°	351.9	351.2	350.4	350.0	349.7	349.3	349.0	348.7
40°	338.4	337.6	336.8	336.2	335.8	335.5	335.1	334.7
42.5°	324.3	323.5	322.7	322.2	321.8	321.4	321.0	320.6
45°	303.3	302.2	301.0	300.2	299.6	299.2	298.7	298.2
47.5°	281.3	280.1	278.9	278.1	277.7	277.3	276.8	276.4
50°	266.6	265.5	264.5	263.6	263.1	262.5	261.9	261.3
52.5°	251.8	250.9	250.0	249.2	248.6	248.1	247.5	246.9
55°	229.3	228.2	227.2	226.4	225.9	225.4	224.9	224.4
57.5°	207.2	206.1	205.2	204.4	203.9	203.3	202.7	202.2
60°	191.5	190.6	189.7	189.1	188.5	188.0	187.6	187.1
62.5°	176.3	175.5	174.7	174.0	173.7	173.3	173.1	172.7
65°	153.9	153.2	152.3	151.8	151.6	151.2	150.9	150.6
67.5°	131.6	130.9	130.3	129.7	129.3	128.8	128.5	128.1
70°	117.3	116.5	115.8	115.3	114.8	114.3	113.8	113.3
72.5°	102.6	102.0	101.4	100.9	100.8	100.5	100.2	99.9
75°	81.6	81.1	80.6	80.2	79.9	79.6	79.4	79.1
77.5°	61.9	61.6	61.3	61.2	61.2	61.2	61.2	61.2
80°	49.4	49.3	49.2	49.2	49.2	49.2	49.2	49.2
82.5°	38.1	37.9	37.7	37.5	37.5	37.4	37.3	37.2
85°	21.6	21.4	21.2	21.1	21.1	21.1	21.1	21.1
87.5°	12.3	12.3	12.5	12.8	12.6	12.8	13.0	12.8
90°	23.6	24.5	25.4	27.2	26.3	27.2	28.2	27.2
92.5°	79.2	62.9	55.5	50.6	48.9	46.1	47.0	45.3
95°	338.7	229.6	179.7	145.8	128.0	119.5	112.9	109.1
97.5°	844.3	676.3	554.9	442.3	373.0	330.6	305.2	297.1
100°	1109.3	1033.0	922.9	789.4	694.4	625.7	589.0	589.9
102.5°	1197.3	1194.9	1130.7	1046.0	972.0	917.7	887.0	865.3
105°	1223.0	1317.2	1335.0	1310.6	1267.2	1231.5	1201.5	1196.7
107.5°	1149.0	1301.7	1384.1	1417.7	1418.4	1406.4	1396.2	1387.5
110°	1078.2	1251.3	1369.8	1435.7	1462.1	1469.6	1467.7	1465.8





TEST NUMBER: P331900-830

CATALOG NUMBER: S123DIP-S340D1025U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1008.1	1185.1	1317.9	1402.6	1450.8	1474.0	1481.2	1481.6
115°	915.4	1079.1	1217.4	1319.9	1390.5	1431.9	1450.8	1455.5
117.5°	848.3	989.6	1113.7	1217.8	1291.4	1338.8	1365.9	1372.2
120°	812.8	939.9	1052.8	1147.8	1222.1	1274.8	1297.4	1303.1
122.5°	785.0	900.0	1004.7	1092.9	1159.0	1206.4	1231.1	1238.3
125°	748.0	850.6	940.8	1016.1	1076.3	1117.7	1141.2	1147.8
127.5°	715.6	807.0	888.5	957.0	1010.6	1046.0	1067.2	1073.3
130°	695.3	780.0	856.1	920.1	970.0	1003.9	1023.6	1031.1
132.5°	676.5	754.3	825.3	886.3	933.1	967.0	984.5	989.8
135°	651.0	717.8	779.0	832.6	878.7	906.9	923.9	930.5
137.5°	627.9	682.7	735.4	781.8	820.6	849.2	863.5	867.8
140°	614.3	662.3	707.5	748.0	783.7	810.0	825.1	824.2
142.5°	601.5	642.8	681.9	717.1	747.6	770.9	784.5	783.5
145°	586.2	617.2	647.2	674.6	698.0	717.8	725.4	727.3
147.5°	573.5	598.1	622.5	641.9	659.7	673.1	680.2	681.0
150°	564.5	586.2	605.9	623.8	637.9	648.2	653.8	653.8
152.5°	556.2	574.9	592.4	607.2	618.3	627.9	631.3	631.3
155°	543.8	558.8	573.0	584.3	592.8	600.2	602.1	603.0
157.5°	530.7	543.2	554.1	563.0	570.3	576.0	577.5	577.3
160°	523.1	533.5	542.8	549.4	556.0	561.7	561.7	560.7
162.5°	514.1	522.9	531.6	537.4	541.8	546.6	546.6	545.6
165°	502.4	508.0	514.6	519.3	523.1	526.9	525.9	525.9
167.5°	492.2	496.5	500.3	503.7	505.4	508.0	507.1	507.1
170°	485.5	488.3	492.0	493.9	494.8	496.7	495.8	495.8
172.5°	479.5	481.5	484.6	485.7	485.9	487.8	486.1	485.3
175°	471.4	472.3	474.2	474.2	474.2	475.1	474.2	473.3
177.5°	466.3	467.0	467.8	467.8	467.0	467.8	466.3	466.3
180°	464.8	464.8	464.8	464.8	464.8	464.8	464.8	464.8

(END OF REPORT)