

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831183

Luminaire Tested: S123DIP-S1165D1025U835-4F0-1E-UDD-G

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831183
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-5)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-S1165D1025U835-4F0-1E-UDD-G
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1025 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9422.8 lumens
Efficiency: N/A
Efficacy: 138.4 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

Luminous Intensity Polar Plot

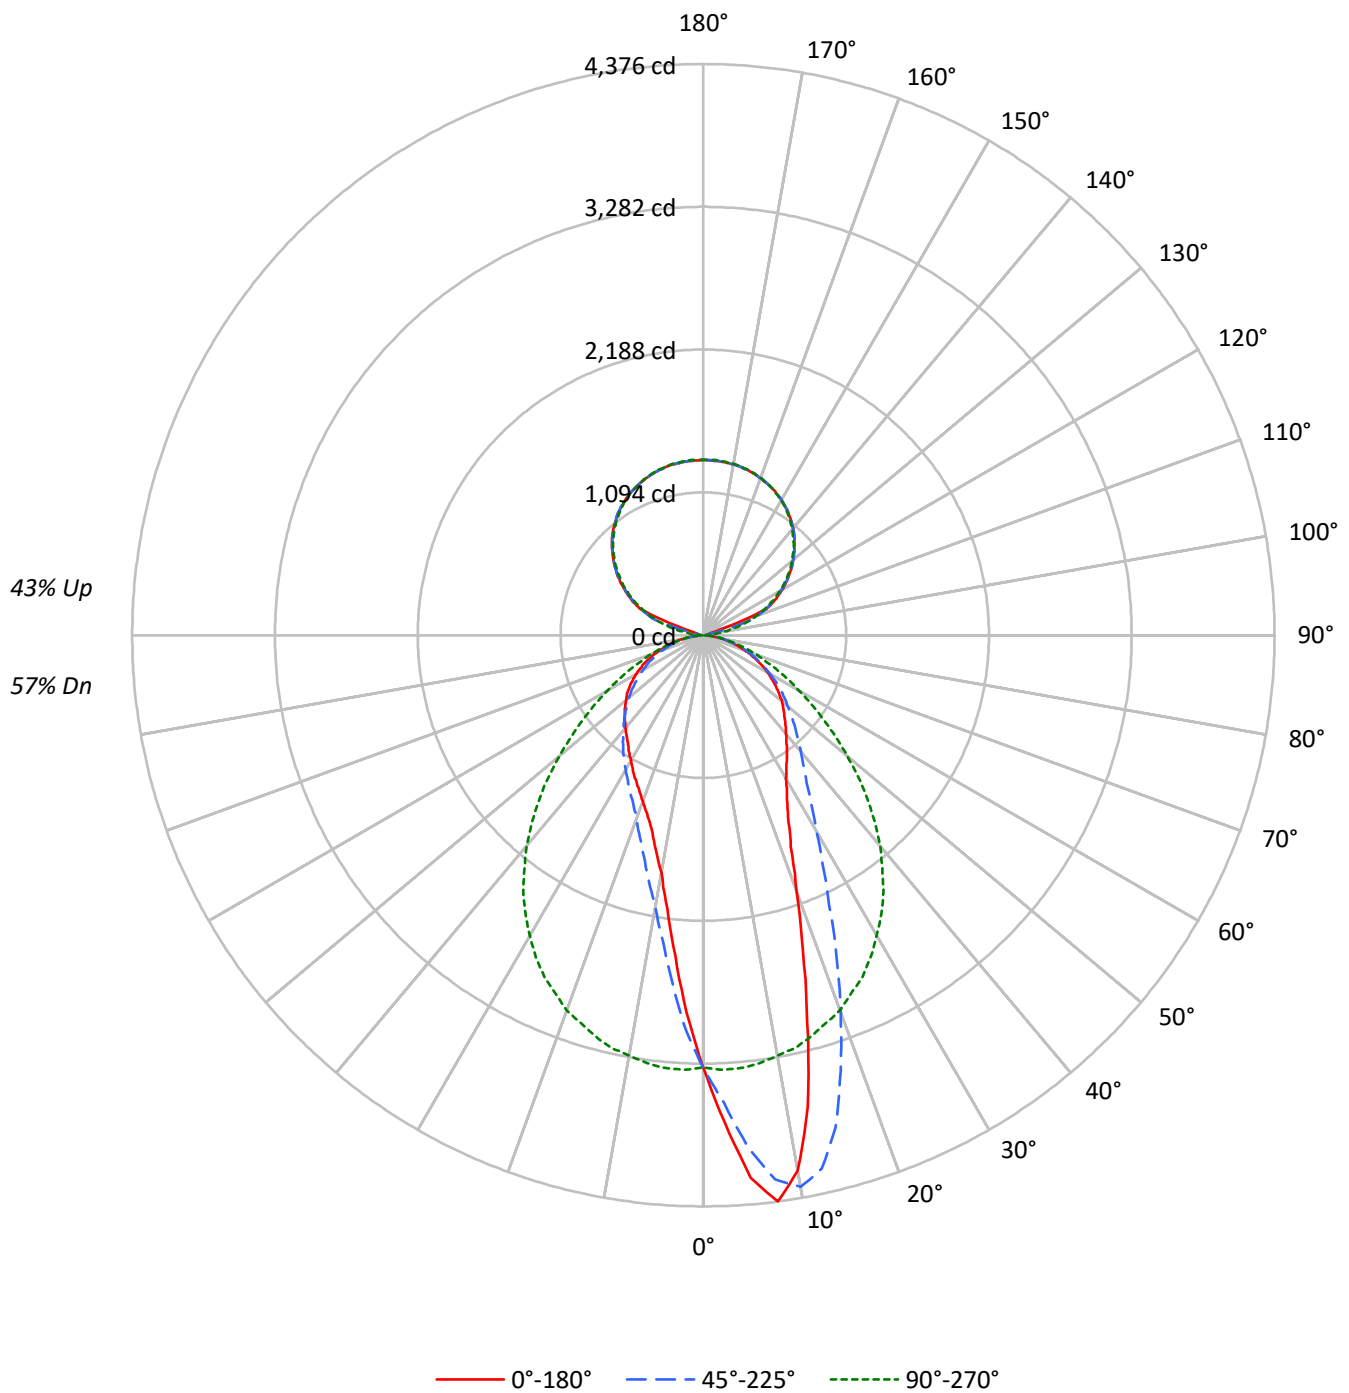

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62			57
1	100	96	92	89	93	89	86	83	77	75	73	66	64	63	56	55	54			49
2	91	84	78	73	85	79	74	69	68	65	61	59	56	53	50	48	46			42
3	84	75	68	62	78	70	64	59	61	56	52	53	49	46	45	42	40			36
4	77	67	59	53	72	63	56	51	55	49	45	47	43	40	41	38	35			32
5	71	60	52	46	66	56	49	44	49	44	40	43	39	35	37	34	31			28
6	66	54	46	41	61	51	44	39	45	39	35	39	35	32	34	31	28			25
7	61	49	42	36	57	46	39	35	41	35	31	36	32	28	31	28	25			23
8	57	45	38	32	53	43	36	31	38	32	28	33	29	26	29	26	23			21
9	53	41	34	29	50	39	33	28	35	29	26	31	27	23	27	24	21			19
10	50	38	31	27	47	36	30	26	32	27	23	29	24	21	25	22	19			18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	35652	35652	35652	35652	35652
5°	45089	42557	35971	28988	26639
10°	45527	46904	35732	23107	20193
15°	34290	43547	35489	19568	17076
20°	23891	35238	35035	17113	15511
25°	18218	27099	34264	15745	14549
30°	15760	21530	33030	14777	13774
35°	14623	18177	31608	14077	13228
40°	13843	16305	29609	13412	13045
45°	13384	15092	27070	12892	12962
50°	13152	14130	24065	12419	12894
55°	12662	13427	21114	11971	12951
60°	12211	12673	18200	11548	12738
65°	11469	11961	15697	11097	12488
70°	10593	11053	13350	10351	11755
75°	9590	9906	11441	9619	10738
80°	7910	8672	9050	8387	9050
85°	6262	7027	6644	7114	7213

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°

Vertical Angle: 45°

Luminance: 30908 cd/sqm

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	313.1	3.3
10°-20°	779.0	8.3
20°-30°	922.4	9.8
30°-40°	927.4	9.8
40°-50°	850.9	9.0
50°-60°	702.3	7.5
60°-70°	496.8	5.3
70°-80°	265.2	2.8
80°-90°	70.0	0.7
90°-100°	47.4	0.5
100°-110°	229.0	2.4
110°-120°	561.3	6.0
120°-130°	712.6	7.6
130°-140°	761.2	8.1
140°-150°	711.8	7.6
150°-160°	574.2	6.1
160°-170°	370.5	3.9
170°-180°	127.7	1.4
0°-30°	2014.6	21.4
0°-40°	2942.0	31.2
0°-60°	4495.2	47.7
0°-90°	5327.2	56.5
90°-120°	837.6	8.9
90°-150°	3023.2	32.1
90°-180°	4096.0	43.5
0°-180°	9422.8	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	3312	3312	3312	3312	3312	
5°	4173	3939	3329	2683	2465	398
15°	3077	3908	3185	1756	1532	850
25°	1534	2282	2885	1326	1225	724
35°	1113	1383	2405	1071	1007	699
45°	879	991	1778	847	852	681
55°	675	716	1125	638	690	604
65°	450	470	616	436	490	447
75°	231	238	275	231	258	242
85°	51	57	54	58	58	57
90°	30	24	1	24	30	16
95°	38	31	61	31	38	32
105°	44	219	297	219	44	91
115°	587	573	558	573	587	552
125°	802	798	786	798	802	717
135°	989	989	979	989	989	763
145°	1141	1139	1130	1139	1141	712
155°	1243	1244	1245	1244	1243	573
165°	1310	1309	1313	1309	1310	370
175°	1338	1340	1344	1340	1338	127
180°	1344	1344	1344	1344	1344	

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2
2.5°	3733.4	3729.5	3725.7	3706.5	3687.3	3678.0	3668.8	3641.2	3613.5	3582.8	3552.0
5°	4173.0	4183.7	4194.5	4182.2	4169.9	4132.2	4094.6	4044.6	3994.7	3938.6	3882.5
7.5°	4375.8	4382.0	4388.1	4380.5	4372.8	4362.8	4352.8	4308.2	4263.6	4206.0	4148.4
10°	4165.3	4179.1	4192.9	4222.9	4252.9	4286.7	4320.5	4314.4	4308.2	4291.3	4274.4
12.5°	3702.6	3719.5	3736.5	3796.4	3856.3	3933.2	4010.0	4076.1	4142.2	4188.3	4234.4
15°	3077.1	3124.0	3170.8	3225.4	3280.0	3392.9	3505.9	3645.0	3784.1	3907.8	4031.6
17.5°	2534.5	2552.2	2569.9	2628.3	2686.7	2828.9	2971.0	3131.6	3292.3	3497.5	3702.6
20°	2085.7	2101.9	2118.0	2194.8	2271.7	2383.1	2494.6	2675.2	2855.8	3076.3	3296.9
22.5°	1752.2	1777.5	1802.9	1845.9	1889.0	1995.8	2102.6	2263.2	2423.9	2667.5	2911.1
25°	1533.9	1552.4	1570.8	1596.9	1623.1	1708.4	1793.7	1925.9	2058.0	2281.7	2505.3
27.5°	1384.8	1392.5	1400.2	1426.3	1452.5	1507.8	1563.1	1676.9	1790.6	1980.4	2170.2
30°	1268.0	1273.4	1278.8	1301.8	1324.9	1362.6	1400.2	1482.4	1564.7	1732.2	1899.7
32.5°	1186.6	1190.4	1194.3	1211.9	1229.6	1256.5	1283.4	1343.3	1403.3	1541.6	1679.9
35°	1112.8	1115.1	1117.4	1130.5	1143.5	1163.5	1183.5	1228.8	1274.2	1383.3	1492.4
37.5°	1048.2	1051.3	1054.4	1062.1	1069.8	1087.4	1105.1	1141.2	1177.3	1261.1	1344.9
40°	985.2	990.6	996.0	1001.4	1006.7	1021.3	1035.9	1063.6	1091.3	1160.4	1229.6
42.5°	931.4	936.8	942.2	944.5	946.8	955.2	963.7	989.1	1014.4	1065.9	1117.4
45°	879.2	881.5	883.8	886.1	888.4	895.3	902.2	924.5	946.8	991.4	1035.9
47.5°	831.5	831.5	831.5	833.1	834.6	840.7	846.9	863.0	879.2	913.7	948.3
50°	785.4	785.4	785.4	783.1	780.8	784.6	788.5	800.8	813.1	843.8	874.6
52.5°	730.1	730.1	730.1	730.8	731.6	731.6	731.6	742.4	753.1	780.8	808.5
55°	674.7	677.8	680.9	678.6	676.3	677.8	679.4	686.3	693.2	715.5	737.8
57.5°	619.4	620.9	622.5	621.7	620.9	621.7	622.5	628.6	634.8	651.7	668.6
60°	567.2	567.2	567.2	565.6	564.1	565.6	567.2	570.2	573.3	588.7	604.0
62.5°	508.7	509.5	510.3	511.1	511.8	510.3	508.7	512.6	516.4	528.0	539.5
65°	450.3	451.1	451.9	454.2	456.5	455.0	453.4	457.3	461.1	469.6	478.0
67.5°	398.1	396.5	395.0	395.8	396.5	398.9	401.2	401.9	402.7	411.9	421.1
70°	336.6	338.1	339.7	338.9	338.1	338.9	339.7	342.0	344.3	351.2	358.1
72.5°	281.3	282.0	282.8	282.8	282.8	284.3	285.9	288.2	290.5	294.3	298.2
75°	230.6	230.6	230.6	232.1	233.6	234.4	235.2	235.2	235.2	238.2	241.3
77.5°	175.2	179.1	182.9	182.1	181.4	182.9	184.4	186.7	189.1	190.6	192.1
80°	127.6	127.6	127.6	128.3	129.1	131.4	133.7	135.3	136.8	139.9	142.9
82.5°	81.5	82.2	83.0	85.3	87.6	89.1	90.7	93.0	95.3	95.3	95.3
85°	50.7	49.2	47.6	49.2	50.7	52.3	53.8	54.6	55.3	56.9	58.4
87.5°	24.6	24.6	24.6	24.6	24.6	25.4	26.1	26.1	26.1	26.1	26.1
90°	29.9	29.5	29.1	28.6	28.2	27.5	26.6	25.7	24.8	24.0	21.1
92.5°	33.9	33.7	33.5	33.3	33.0	32.2	30.6	29.1	27.5	26.0	24.0
95°	37.9	37.9	37.9	37.9	37.9	37.2	35.6	34.0	32.5	30.9	28.5
97.5°	40.9	40.7	40.5	40.3	40.0	39.0	37.3	35.5	33.7	31.9	43.3
100°	41.9	41.7	41.5	41.3	41.0	40.0	38.3	36.5	34.7	32.9	67.5
102.5°	42.9	42.5	42.0	41.6	41.1	44.6	51.9	59.2	66.5	73.9	112.5
105°	43.9	43.5	43.0	42.6	42.1	61.6	100.8	140.1	179.3	218.6	238.6
107.5°	103.8	132.9	161.9	191.0	220.0	251.6	285.8	320.0	354.1	388.3	385.0
110°	274.5	306.2	337.9	369.6	401.4	420.9	428.2	435.5	442.8	450.2	447.7

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	520.0	520.5	520.9	521.4	521.8	521.0	519.0	517.0	515.0	513.0	510.6
115°	586.9	586.0	585.1	584.2	583.4	581.8	579.6	577.4	575.2	572.9	570.9
117.5°	640.8	640.6	640.4	640.1	639.9	638.9	637.2	635.4	633.6	631.8	630.7
120°	696.7	696.7	696.7	696.7	696.7	695.8	694.0	692.3	690.5	688.7	688.1
122.5°	751.6	751.4	751.2	750.9	750.7	750.1	748.9	747.8	746.7	745.6	744.7
125°	802.5	802.1	801.6	801.2	800.7	800.3	799.8	799.4	799.0	798.5	797.6
127.5°	852.4	852.9	853.3	853.7	854.2	854.1	853.4	852.8	852.1	851.4	850.3
130°	900.3	900.8	901.2	901.7	902.1	901.9	901.0	900.1	899.2	898.3	897.4
132.5°	944.2	944.9	945.6	946.2	946.9	946.8	945.9	945.0	944.1	943.2	942.6
135°	989.2	989.8	990.5	991.2	991.8	991.8	991.2	990.5	989.8	989.2	988.3
137.5°	1032.1	1032.5	1033.0	1033.4	1033.9	1033.5	1032.4	1031.3	1030.2	1029.1	1028.6
140°	1070.0	1070.5	1070.9	1071.3	1071.8	1071.6	1070.7	1069.8	1068.9	1068.0	1067.4
142.5°	1104.9	1105.6	1106.3	1106.9	1107.6	1107.6	1106.9	1106.3	1105.6	1104.9	1104.3
145°	1140.9	1140.9	1140.9	1140.9	1140.9	1140.7	1140.2	1139.8	1139.3	1138.9	1138.4
147.5°	1166.8	1167.9	1169.1	1170.2	1171.3	1171.6	1171.2	1170.7	1170.3	1169.8	1169.4
150°	1196.8	1197.4	1198.1	1198.8	1199.4	1199.6	1199.1	1198.7	1198.2	1197.8	1197.3
152.5°	1220.7	1221.8	1223.0	1224.1	1225.2	1225.3	1224.4	1223.5	1222.6	1221.7	1221.5
155°	1242.7	1244.0	1245.4	1246.7	1248.0	1248.1	1247.0	1245.9	1244.8	1243.7	1243.5
157.5°	1261.7	1263.4	1265.2	1267.0	1268.8	1269.0	1267.6	1266.3	1265.0	1263.7	1263.9
160°	1279.6	1281.2	1282.7	1284.3	1285.8	1285.9	1284.6	1283.3	1282.0	1280.6	1280.8
162.5°	1296.6	1297.9	1299.3	1300.6	1301.9	1301.8	1300.3	1298.7	1297.1	1295.6	1295.8
165°	1309.6	1311.1	1312.7	1314.2	1315.8	1315.7	1313.9	1312.1	1310.3	1308.6	1308.8
167.5°	1319.6	1321.3	1323.1	1324.9	1326.6	1326.6	1324.9	1323.1	1321.3	1319.6	1319.6
170°	1328.5	1330.3	1332.1	1333.9	1335.6	1335.6	1333.9	1332.1	1330.3	1328.5	1328.5
172.5°	1333.5	1335.5	1337.5	1339.5	1341.5	1341.6	1339.8	1338.1	1336.3	1334.5	1334.3
175°	1338.5	1340.3	1342.1	1343.8	1345.6	1345.7	1344.2	1342.6	1341.1	1339.5	1339.3
177.5°	1339.5	1341.7	1343.9	1346.2	1348.4	1348.6	1346.8	1345.1	1343.3	1341.5	1341.3
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2
2.5°	3542.8	3533.6	3499.8	3465.9	3427.5	3389.1	3360.7	3332.2	3290.0	3247.7	3213.1
5°	3839.4	3796.4	3724.9	3653.5	3556.6	3459.8	3394.5	3329.1	3241.5	3153.9	3084.0
7.5°	4074.6	4000.8	3900.9	3801.0	3674.2	3547.4	3427.5	3307.6	3173.9	3040.2	2931.1
10°	4224.5	4174.5	4059.2	3944.0	3774.1	3604.3	3436.7	3269.2	3097.1	2924.9	2780.4
12.5°	4239.1	4243.7	4137.6	4031.6	3839.4	3647.3	3443.7	3240.0	3023.3	2806.6	2638.3
15°	4110.7	4189.9	4131.5	4073.1	3879.4	3685.7	3435.2	3184.7	2934.9	2685.1	2490.7
17.5°	3872.5	4042.3	4050.8	4059.2	3865.6	3671.9	3394.5	3117.0	2834.2	2551.4	2347.0
20°	3547.4	3797.9	3884.0	3970.1	3812.5	3655.0	3356.8	3058.6	2742.0	2425.4	2211.0
22.5°	3215.4	3519.7	3677.3	3834.8	3718.0	3601.2	3283.8	2966.4	2632.1	2297.8	2080.3
25°	2837.3	3169.3	3411.4	3653.5	3582.0	3510.5	3197.7	2885.0	2529.1	2173.3	1951.2
27.5°	2507.6	2845.0	3137.0	3429.1	3413.7	3398.3	3087.8	2777.4	2413.1	2048.8	1834.4
30°	2214.1	2528.4	2855.0	3181.6	3219.3	3256.9	2957.2	2657.5	2292.4	1927.4	1720.7
32.5°	1954.3	2228.7	2579.1	2929.5	3003.3	3077.1	2806.6	2536.1	2174.9	1813.7	1614.6
35°	1741.4	1990.4	2340.9	2691.3	2783.5	2875.7	2640.6	2405.4	2053.4	1701.5	1511.6
37.5°	1553.1	1761.4	2103.4	2445.4	2558.3	2671.3	2460.7	2250.2	1920.5	1590.8	1416.3
40°	1397.1	1564.7	1879.0	2193.3	2323.9	2454.6	2280.9	2107.2	1794.5	1481.7	1321.1
42.5°	1266.5	1415.6	1700.7	1985.8	2111.1	2236.3	2089.6	1942.8	1664.6	1386.4	1239.6
45°	1155.1	1274.2	1533.2	1792.1	1911.3	2030.4	1904.3	1778.3	1533.2	1288.0	1151.2
47.5°	1050.5	1152.8	1374.1	1595.4	1701.5	1807.5	1709.1	1610.8	1403.3	1195.8	1072.1
50°	956.8	1039.0	1232.7	1426.3	1518.6	1610.8	1523.9	1437.1	1266.5	1095.9	988.3
52.5°	875.3	942.2	1104.3	1266.5	1345.6	1424.8	1350.3	1275.7	1140.5	1005.2	911.4
55°	794.6	851.5	992.1	1132.8	1186.6	1240.4	1182.7	1125.1	1016.0	906.8	827.7
57.5°	719.3	770.0	885.3	1000.6	1042.1	1083.6	1031.3	979.1	896.8	814.6	748.5
60°	645.5	687.0	783.1	879.2	904.5	929.9	887.6	845.4	787.7	730.1	670.9
62.5°	577.1	614.8	686.3	757.7	774.6	791.6	759.3	727.0	683.2	639.4	593.3
65°	506.4	534.9	593.3	651.7	662.4	673.2	644.8	616.3	583.3	550.2	516.4
67.5°	441.1	461.1	508.7	556.4	557.2	557.9	534.9	511.8	493.4	474.9	448.0
70°	377.3	396.5	428.1	459.6	460.3	461.1	442.7	424.2	410.4	396.5	376.6
72.5°	312.0	325.8	349.7	373.5	372.0	370.4	358.9	347.4	336.6	325.8	311.2
75°	252.8	264.4	280.5	296.6	292.0	287.4	281.3	275.1	265.9	256.7	247.5
77.5°	199.0	206.0	215.2	224.4	221.3	218.3	212.9	207.5	200.6	193.7	189.8
80°	146.0	149.1	155.2	161.4	159.8	158.3	152.2	146.0	144.5	142.9	137.6
82.5°	99.1	103.0	104.5	106.1	105.3	104.5	99.9	95.3	93.8	92.2	91.5
85°	59.2	59.9	60.7	61.5	59.2	56.9	55.3	53.8	53.8	53.8	53.0
87.5°	26.9	27.7	27.7	27.7	26.9	26.1	24.6	23.1	23.8	24.6	24.6
90°	18.2	15.3	12.4	9.9	7.7	5.4	3.2	1.0	3.2	5.4	7.7
92.5°	22.0	20.0	18.0	17.6	19.0	20.3	21.6	23.0	21.6	20.3	19.0
95°	26.1	23.6	21.2	24.5	33.6	42.7	51.8	60.9	51.8	42.7	33.6
97.5°	54.6	65.9	77.2	86.0	92.2	98.4	104.6	110.8	104.6	98.4	92.2
100°	102.1	136.7	171.3	186.4	182.0	177.6	173.1	168.7	173.1	177.6	182.0
102.5°	151.1	189.6	228.2	246.1	243.2	240.3	237.4	234.6	237.4	240.3	243.2
105°	258.5	278.5	298.4	307.2	304.8	302.3	299.9	297.4	299.9	302.3	304.8
107.5°	381.6	378.3	375.0	372.3	370.3	368.3	366.3	364.3	366.3	368.3	370.3
110°	445.3	442.8	440.4	438.3	436.5	434.7	433.0	431.2	433.0	434.7	436.5

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	508.2	505.7	503.3	501.3	499.7	498.2	496.6	495.1	496.6	498.2	499.7
115°	568.9	566.9	565.0	563.3	562.0	560.6	559.3	558.0	559.3	560.6	562.0
117.5°	629.6	628.5	627.4	626.1	624.5	623.0	621.4	619.8	621.4	623.0	624.5
120°	687.4	686.7	686.1	684.7	682.7	680.7	678.7	676.7	678.7	680.7	682.7
122.5°	743.8	743.0	742.1	740.8	739.3	737.7	736.2	734.6	736.2	737.7	739.3
125°	796.7	795.9	795.0	793.6	791.9	790.1	788.3	786.5	788.3	790.1	791.9
127.5°	849.2	848.1	847.0	845.5	843.8	842.0	840.2	838.4	840.2	842.0	843.8
130°	896.6	895.7	894.8	893.5	891.7	889.9	888.1	886.4	888.1	889.9	891.7
132.5°	941.9	941.3	940.6	939.4	937.6	935.8	934.0	932.3	934.0	935.8	937.6
135°	987.4	986.5	985.6	984.5	983.2	981.8	980.5	979.2	980.5	981.8	983.2
137.5°	1028.2	1027.8	1027.3	1026.2	1024.4	1022.7	1020.9	1019.1	1020.9	1022.7	1024.4
140°	1066.7	1066.0	1065.4	1064.4	1063.0	1061.7	1060.4	1059.0	1060.4	1061.7	1063.0
142.5°	1103.6	1103.0	1102.3	1101.3	1100.0	1098.6	1097.3	1096.0	1097.3	1098.6	1100.0
145°	1138.0	1137.6	1137.1	1136.1	1134.6	1133.0	1131.5	1129.9	1131.5	1133.0	1134.6
147.5°	1168.9	1168.5	1168.1	1167.3	1166.2	1165.1	1164.0	1162.8	1164.0	1165.1	1166.2
150°	1196.9	1196.4	1196.0	1195.4	1194.8	1194.1	1193.5	1192.8	1193.5	1194.1	1194.8
152.5°	1221.3	1221.1	1220.8	1220.6	1220.4	1220.2	1220.0	1219.7	1220.0	1220.2	1220.4
155°	1243.2	1243.0	1242.8	1242.9	1243.4	1243.8	1244.2	1244.7	1244.2	1243.8	1243.4
157.5°	1264.1	1264.3	1264.5	1264.7	1264.7	1264.7	1264.7	1264.7	1264.7	1264.7	1264.7
160°	1281.1	1281.3	1281.5	1281.7	1282.0	1282.2	1282.4	1282.6	1282.4	1282.2	1282.0
162.5°	1296.0	1296.3	1296.5	1296.9	1297.6	1298.3	1298.9	1299.6	1298.9	1298.3	1297.6
165°	1309.0	1309.2	1309.5	1309.9	1310.6	1311.2	1311.9	1312.6	1311.9	1311.2	1310.6
167.5°	1319.6	1319.6	1319.6	1320.0	1320.9	1321.8	1322.7	1323.5	1322.7	1321.8	1320.9
170°	1328.5	1328.5	1328.5	1329.0	1329.9	1330.8	1331.6	1332.5	1331.6	1330.8	1329.9
172.5°	1334.1	1333.9	1333.6	1334.1	1335.2	1336.3	1337.4	1338.5	1337.4	1336.3	1335.2
175°	1339.1	1338.8	1338.6	1339.1	1340.2	1341.3	1342.4	1343.5	1342.4	1341.3	1340.2
177.5°	1341.1	1340.8	1340.6	1341.1	1342.2	1343.3	1344.4	1345.5	1344.4	1343.3	1342.2
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2	3312.2
2.5°	3178.5	3148.6	3118.6	3095.5	3072.5	3033.3	2994.1	2984.9	2975.6	2962.6	2949.5
5°	3014.1	2940.3	2866.5	2800.4	2734.3	2682.8	2631.4	2597.5	2563.7	2539.1	2514.5
7.5°	2821.9	2711.3	2600.6	2522.2	2443.8	2369.3	2294.7	2270.9	2247.1	2214.8	2182.5
10°	2636.0	2513.8	2391.6	2289.4	2187.2	2114.1	2041.1	2011.9	1982.7	1942.0	1901.3
12.5°	2470.0	2336.2	2202.5	2099.5	1996.6	1925.9	1855.2	1812.9	1770.6	1747.6	1724.5
15°	2296.3	2153.3	2010.4	1915.1	1819.8	1756.0	1692.2	1655.4	1618.5	1596.2	1573.9
17.5°	2142.6	2001.2	1859.8	1768.3	1676.9	1618.5	1560.1	1527.8	1495.5	1478.6	1461.7
20°	1996.6	1858.2	1719.9	1630.8	1541.6	1494.0	1446.3	1425.6	1404.8	1391.0	1377.2
22.5°	1862.8	1726.8	1590.8	1514.7	1438.6	1400.2	1361.8	1347.2	1332.6	1321.1	1309.5
25°	1729.1	1607.7	1486.3	1421.7	1357.2	1325.7	1294.2	1279.6	1265.0	1253.4	1241.9
27.5°	1620.0	1504.0	1387.9	1332.6	1277.2	1252.7	1228.1	1216.5	1205.0	1194.3	1183.5
30°	1513.9	1410.2	1306.5	1258.8	1211.2	1188.9	1166.6	1155.1	1143.5	1133.5	1123.5
32.5°	1415.6	1326.4	1237.3	1193.5	1149.7	1131.2	1112.8	1099.0	1085.1	1077.4	1069.8
35°	1321.8	1241.9	1162.0	1125.9	1089.7	1071.3	1052.8	1041.3	1029.8	1023.6	1017.5
37.5°	1241.9	1170.4	1099.0	1064.4	1029.8	1012.1	994.4	984.5	974.5	972.2	969.8
40°	1160.4	1099.0	1037.5	1003.7	969.8	954.5	939.1	933.0	926.8	925.3	923.7
42.5°	1092.8	1032.9	972.9	942.2	911.4	898.4	885.3	882.2	879.2	881.5	883.8
45°	1014.4	964.5	914.5	886.1	857.6	846.9	836.1	833.8	831.5	836.1	840.7
47.5°	948.3	902.2	856.1	829.2	802.3	794.6	786.9	786.2	785.4	791.6	797.7
50°	880.7	836.1	791.6	770.0	748.5	741.6	734.7	737.0	739.3	749.3	759.3
52.5°	817.7	776.2	734.7	714.7	694.7	690.1	685.5	690.9	696.3	707.0	717.8
55°	748.5	710.9	673.2	657.8	642.5	637.9	633.2	644.0	654.8	664.8	674.7
57.5°	682.4	649.4	616.3	602.5	588.7	587.9	587.1	597.1	607.1	617.9	628.6
60°	611.7	584.1	556.4	545.6	534.9	536.4	538.0	549.5	561.0	569.5	577.9
62.5°	547.2	524.1	501.1	491.1	481.1	484.9	488.8	500.3	511.8	521.8	531.8
65°	482.6	463.4	444.2	437.3	430.4	435.7	441.1	451.1	461.1	468.0	474.9
67.5°	421.1	405.0	388.9	383.5	378.1	383.5	388.9	398.9	408.8	415.8	422.7
70°	356.6	343.5	330.5	326.6	322.8	328.9	335.1	343.5	352.0	358.9	365.8
72.5°	296.6	286.7	276.7	275.9	275.1	280.5	285.9	294.3	302.8	307.4	312.0
75°	238.2	232.9	227.5	226.7	225.9	231.3	236.7	241.3	245.9	249.8	253.6
77.5°	186.0	181.4	176.8	177.5	178.3	182.1	186.0	190.6	195.2	197.5	199.8
80°	132.2	130.6	129.1	130.6	132.2	135.3	138.3	141.4	144.5	146.0	147.6
82.5°	90.7	89.1	87.6	89.9	92.2	94.5	96.8	99.1	101.4	102.2	103.0
85°	52.3	54.6	56.9	56.9	56.9	57.6	58.4	59.2	59.9	59.2	58.4
87.5°	24.6	25.4	26.1	26.1	26.1	26.9	27.7	27.7	27.7	26.9	26.1
90°	9.9	12.4	15.3	18.2	21.1	24.0	24.8	25.7	26.6	27.5	28.2
92.5°	17.6	18.0	20.0	22.0	24.0	26.0	27.5	29.1	30.6	32.2	33.0
95°	24.5	21.2	23.6	26.1	28.5	30.9	32.5	34.0	35.6	37.2	37.9
97.5°	86.0	77.2	65.9	54.6	43.3	31.9	33.7	35.5	37.3	39.0	40.0
100°	186.4	171.3	136.7	102.1	67.5	32.9	34.7	36.5	38.3	40.0	41.0
102.5°	246.1	228.2	189.6	151.1	112.5	73.9	66.5	59.2	51.9	44.6	41.1
105°	307.2	298.4	278.5	258.5	238.6	218.6	179.3	140.1	100.8	61.6	42.1
107.5°	372.3	375.0	378.3	381.6	385.0	388.3	354.1	320.0	285.8	251.6	220.0
110°	438.3	440.4	442.8	445.3	447.7	450.2	442.8	435.5	428.2	420.9	401.4

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	501.3	503.3	505.7	508.2	510.6	513.0	515.0	517.0	519.0	521.0	521.8
115°	563.3	565.0	566.9	568.9	570.9	572.9	575.2	577.4	579.6	581.8	583.4
117.5°	626.1	627.4	628.5	629.6	630.7	631.8	633.6	635.4	637.2	638.9	639.9
120°	684.7	686.1	686.7	687.4	688.1	688.7	690.5	692.3	694.0	695.8	696.7
122.5°	740.8	742.1	743.0	743.8	744.7	745.6	746.7	747.8	748.9	750.1	750.7
125°	793.6	795.0	795.9	796.7	797.6	798.5	799.0	799.4	799.8	800.3	800.7
127.5°	845.5	847.0	848.1	849.2	850.3	851.4	852.1	852.8	853.4	854.1	854.2
130°	893.5	894.8	895.7	896.6	897.4	898.3	899.2	900.1	901.0	901.9	902.1
132.5°	939.4	940.6	941.3	941.9	942.6	943.2	944.1	945.0	945.9	946.8	946.9
135°	984.5	985.6	986.5	987.4	988.3	989.2	989.8	990.5	991.2	991.8	991.8
137.5°	1026.2	1027.3	1027.8	1028.2	1028.6	1029.1	1030.2	1031.3	1032.4	1033.5	1033.9
140°	1064.4	1065.4	1066.0	1066.7	1067.4	1068.0	1068.9	1069.8	1070.7	1071.6	1071.8
142.5°	1101.3	1102.3	1103.0	1103.6	1104.3	1104.9	1105.6	1106.3	1106.9	1107.6	1107.6
145°	1136.1	1137.1	1137.6	1138.0	1138.4	1138.9	1139.3	1139.8	1140.2	1140.7	1140.9
147.5°	1167.3	1168.1	1168.5	1168.9	1169.4	1169.8	1170.3	1170.7	1171.2	1171.6	1171.3
150°	1195.4	1196.0	1196.4	1196.9	1197.3	1197.8	1198.2	1198.7	1199.1	1199.6	1199.4
152.5°	1220.6	1220.8	1221.1	1221.3	1221.5	1221.7	1222.6	1223.5	1224.4	1225.3	1225.2
155°	1242.9	1242.8	1243.0	1243.2	1243.5	1243.7	1244.8	1245.9	1247.0	1248.1	1248.0
157.5°	1264.7	1264.5	1264.3	1264.1	1263.9	1263.7	1265.0	1266.3	1267.6	1269.0	1268.8
160°	1281.7	1281.5	1281.3	1281.1	1280.8	1280.6	1282.0	1283.3	1284.6	1285.9	1285.8
162.5°	1296.9	1296.5	1296.3	1296.0	1295.8	1295.6	1297.1	1298.7	1300.3	1301.8	1301.9
165°	1309.9	1309.5	1309.2	1309.0	1308.8	1308.6	1310.3	1312.1	1313.9	1315.7	1315.8
167.5°	1320.0	1319.6	1319.6	1319.6	1319.6	1319.6	1321.3	1323.1	1324.9	1326.6	1326.6
170°	1329.0	1328.5	1328.5	1328.5	1328.5	1328.5	1330.3	1332.1	1333.9	1335.6	1335.6
172.5°	1334.1	1333.6	1333.9	1334.1	1334.3	1334.5	1336.3	1338.1	1339.8	1341.6	1341.5
175°	1339.1	1338.6	1338.8	1339.1	1339.3	1339.5	1341.1	1342.6	1344.2	1345.7	1345.6
177.5°	1341.1	1340.6	1340.8	1341.1	1341.3	1341.5	1343.3	1345.1	1346.8	1348.6	1348.4
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	3312.2	3312.2	3312.2	3312.2
2.5°	2944.1	2938.8	2917.2	2895.7
5°	2496.1	2477.6	2471.5	2465.4
7.5°	2181.0	2179.5	2147.2	2114.9
10°	1903.6	1905.9	1876.7	1847.5
12.5°	1705.3	1686.1	1683.8	1681.5
15°	1556.2	1538.5	1535.5	1532.4
17.5°	1450.9	1440.2	1437.1	1434.0
20°	1371.0	1364.9	1359.5	1354.1
22.5°	1301.8	1294.2	1289.5	1284.9
25°	1235.0	1228.1	1226.5	1225.0
27.5°	1175.0	1166.6	1166.6	1166.6
30°	1118.2	1112.8	1110.5	1108.2
32.5°	1065.1	1060.5	1060.5	1060.5
35°	1015.2	1012.9	1009.8	1006.7
37.5°	969.8	969.8	968.3	966.8
40°	926.0	928.4	928.4	928.4
42.5°	886.1	888.4	888.4	888.4
45°	844.6	848.4	850.0	851.5
47.5°	803.9	810.0	811.5	813.1
50°	763.9	768.5	769.3	770.0
52.5°	723.2	728.5	732.4	736.2
55°	680.1	685.5	687.8	690.1
57.5°	634.0	639.4	640.2	640.9
60°	583.3	588.7	590.2	591.7
62.5°	534.9	538.0	539.5	541.0
65°	479.5	484.2	487.2	490.3
67.5°	426.5	430.4	430.4	430.4
70°	367.3	368.9	371.2	373.5
72.5°	312.8	313.5	313.5	313.5
75°	255.1	256.7	257.4	258.2
77.5°	200.6	201.3	201.3	201.3
80°	146.8	146.0	146.0	146.0
82.5°	100.7	98.4	98.4	98.4
85°	57.6	56.9	57.6	58.4
87.5°	26.1	26.1	26.1	26.1
90°	28.6	29.1	29.5	29.9
92.5°	33.3	33.5	33.7	33.9
95°	37.9	37.9	37.9	37.9
97.5°	40.3	40.5	40.7	40.9
100°	41.3	41.5	41.7	41.9
102.5°	41.6	42.0	42.5	42.9
105°	42.6	43.0	43.5	43.9
107.5°	191.0	161.9	132.9	103.8
110°	369.6	337.9	306.2	274.5

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	521.4	520.9	520.5	520.0
115°	584.2	585.1	586.0	586.9
117.5°	640.1	640.4	640.6	640.8
120°	696.7	696.7	696.7	696.7
122.5°	750.9	751.2	751.4	751.6
125°	801.2	801.6	802.1	802.5
127.5°	853.7	853.3	852.9	852.4
130°	901.7	901.2	900.8	900.3
132.5°	946.2	945.6	944.9	944.2
135°	991.2	990.5	989.8	989.2
137.5°	1033.4	1033.0	1032.5	1032.1
140°	1071.3	1070.9	1070.5	1070.0
142.5°	1106.9	1106.3	1105.6	1104.9
145°	1140.9	1140.9	1140.9	1140.9
147.5°	1170.2	1169.1	1167.9	1166.8
150°	1198.8	1198.1	1197.4	1196.8
152.5°	1224.1	1223.0	1221.8	1220.7
155°	1246.7	1245.4	1244.0	1242.7
157.5°	1267.0	1265.2	1263.4	1261.7
160°	1284.3	1282.7	1281.2	1279.6
162.5°	1300.6	1299.3	1297.9	1296.6
165°	1314.2	1312.7	1311.1	1309.6
167.5°	1324.9	1323.1	1321.3	1319.6
170°	1333.9	1332.1	1330.3	1328.5
172.5°	1339.5	1337.5	1335.5	1333.5
175°	1343.8	1342.1	1340.3	1338.5
177.5°	1346.2	1343.9	1341.7	1339.5
180°	1343.5	1343.5	1343.5	1343.5

TEST NUMBER: P831183

CATALOG NUMBER: S123DIP-S1165D1025U835-4F0-1E-UDD-G

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.57	17.46	17.48	18.38	19.55	18.81	19.69	19.72	20.61	21.79
	3H	18.22	19.01	19.14	19.94	21.15	20.24	21.03	21.16	21.96	23.16
	4H	18.80	19.55	19.74	20.48	21.69	20.69	21.43	21.62	22.37	23.58
	6H	19.17	19.86	20.12	20.80	22.03	20.97	21.65	21.91	22.59	23.82
	8H	19.27	19.92	20.22	20.88	22.10	21.03	21.68	21.98	22.64	23.86
	12H	19.32	19.94	20.27	20.89	22.14	21.05	21.67	22.01	22.62	23.87
4H	2H	17.15	17.90	18.09	18.83	20.04	18.98	19.72	19.92	20.66	21.87
	3H	18.98	19.60	19.93	20.57	21.80	20.60	21.22	21.55	22.18	23.41
	4H	19.68	20.25	20.64	21.21	22.46	21.18	21.75	22.14	22.71	23.96
	6H	20.16	20.65	21.13	21.63	22.88	21.59	22.08	22.56	23.06	24.31
	8H	20.30	20.75	21.27	21.73	22.99	21.70	22.16	22.67	23.13	24.40
	12H	20.36	20.77	21.35	21.77	23.04	21.75	22.16	22.74	23.15	24.42
8H	4H	19.95	20.40	20.92	21.38	22.65	21.29	21.74	22.26	22.72	23.99
	6H	20.54	20.91	21.54	21.93	23.20	21.79	22.17	22.79	23.19	24.45
	8H	20.75	21.08	21.75	22.08	23.37	21.97	22.30	22.98	23.31	24.59
	12H	20.87	21.16	21.88	22.16	23.49	22.08	22.37	23.09	23.37	24.69
12H	4H	19.95	20.36	20.94	21.35	22.62	21.27	21.68	22.26	22.67	23.94
	6H	20.59	20.92	21.60	21.93	23.21	21.81	22.14	22.81	23.15	24.43
	8H	20.83	21.12	21.83	22.12	23.44	22.01	22.30	23.02	23.30	24.63

END OF REPORT