

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332351

Luminaire Tested: **S123RDIP-S1000D1025U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332351
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1000D1025U835-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1025 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7891.9 lumens
Efficiency: N/A
Efficacy: 130.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332351

CATALOG NUMBER: S123RDIP-S1000D1025U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

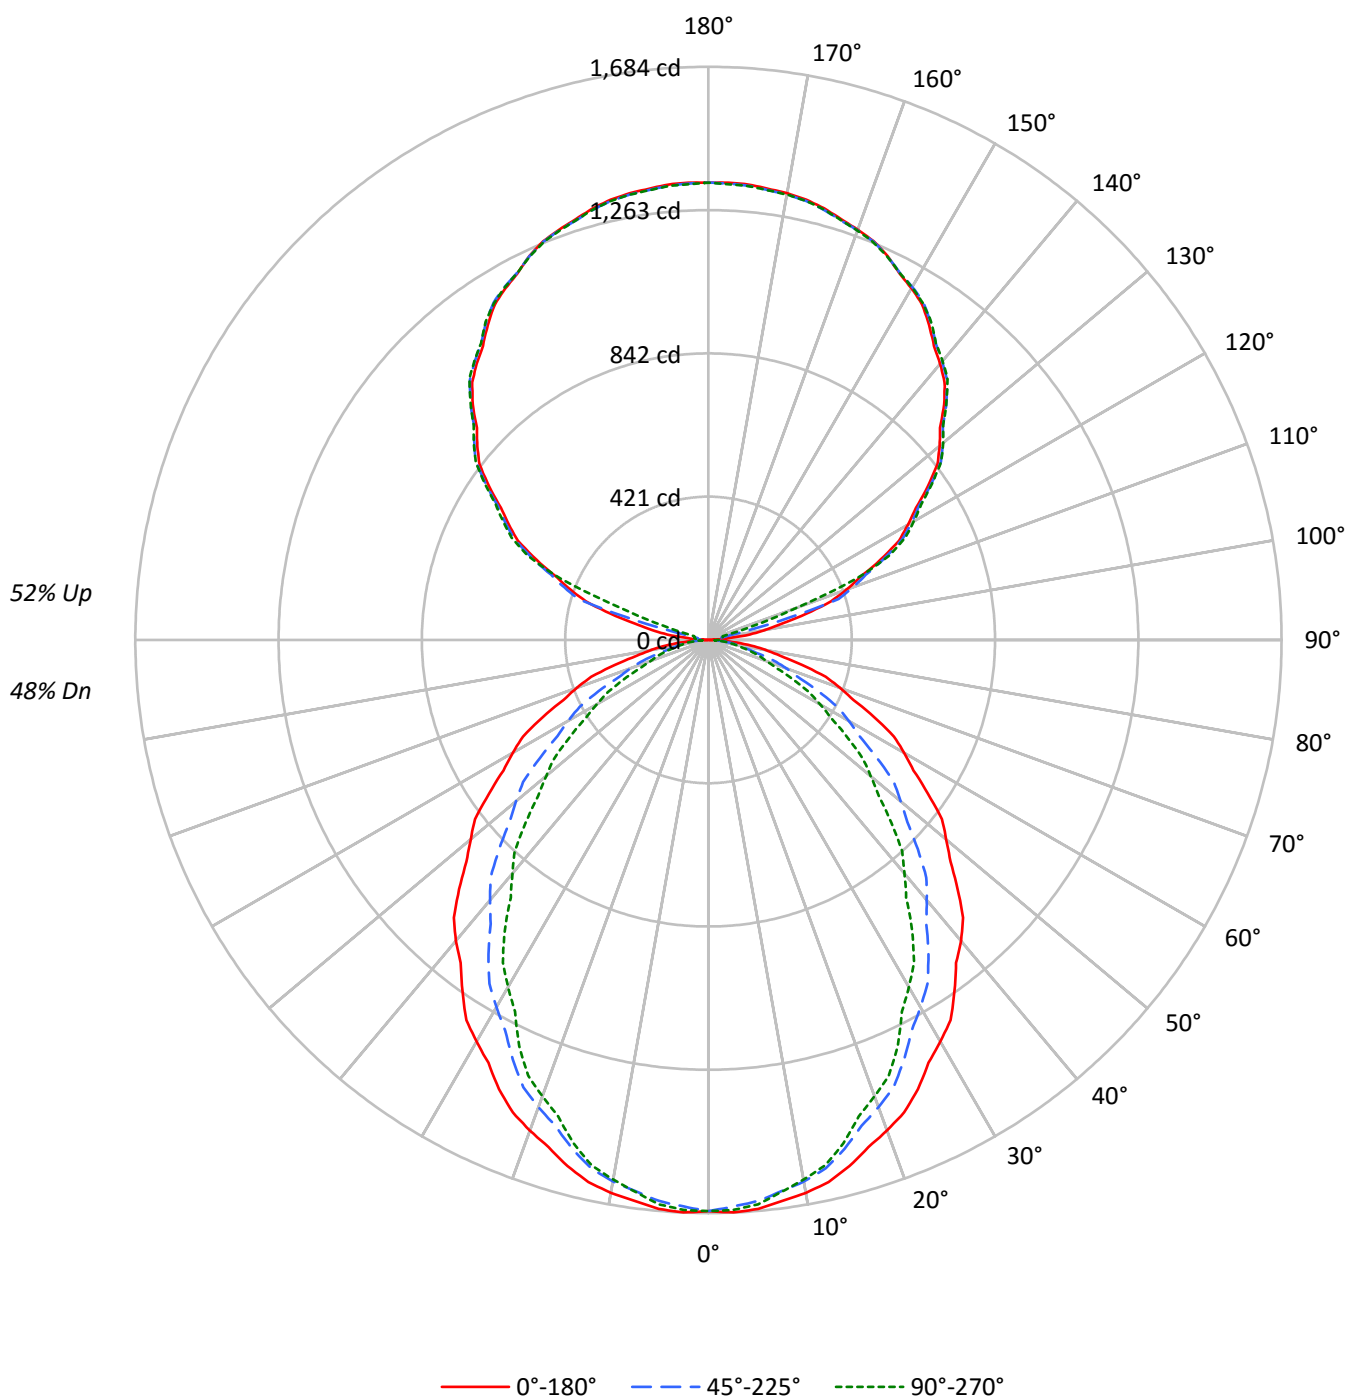

TEST NUMBER: P332351

CATALOG NUMBER: S123RDIP-S1000D1025U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	107	107	107	107	98	98	98	98	82	82	82		68	68	68		54
1	98	93	90	86	90	86	83	80	73	70	68		60	58	57		49
2	89	82	76	71	82	76	71	66	64	60	57		53	50	48		43
3	82	72	65	59	75	67	61	56	57	52	48		47	44	41		38
4	75	64	56	51	69	59	53	47	51	45	41		42	38	35		35
5	69	57	49	43	63	53	46	41	45	40	36		38	34	31		31
6	63	51	44	38	58	48	41	36	41	35	31		34	30	27		28
7	59	47	39	33	54	43	36	31	37	32	28		31	27	24		26
8	54	42	35	29	50	39	33	28	34	29	25		29	25	22		24
9	51	39	31	26	47	36	29	25	31	26	22		27	22	19		22
10	47	35	28	24	44	33	27	22	29	24	20		25	20	18		21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	18064	18064	18064
5°	18133	17882	17986
10°	18030	17658	17598
15°	17836	17245	17063
20°	17570	16728	16339
25°	17296	16149	15631
30°	16933	15479	14633
35°	16561	14808	13717
40°	16218	14018	12584
45°	15767	13239	11561
50°	15270	12353	10416
55°	14763	11340	9348
60°	14299	10256	8174
65°	13692	9082	7002
70°	12935	7626	5655
75°	11832	6001	5319
80°	10544	5312	4891
85°	8904	4705	4372

TEST NUMBER: P332351

CATALOG NUMBER: S123RDIP-S1000D1025U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.6	2.0
10°-20°	438.5	5.6
20°-30°	631.4	8.0
30°-40°	711.2	9.0
40°-50°	680.4	8.6
50°-60°	557.2	7.1
60°-70°	375.9	4.8
70°-80°	189.1	2.4
80°-90°	53.8	0.7
90°-100°	48.8	0.6
100°-110°	232.8	2.9
110°-120°	559.2	7.1
120°-130°	712.1	9.0
130°-140°	760.8	9.6
140°-150°	711.5	9.0
150°-160°	573.9	7.3
160°-170°	370.4	4.7
170°-180°	127.6	1.6
0°-30°	1227.4	15.6
0°-40°	1938.6	24.6
0°-60°	3176.1	40.2
0°-90°	3794.9	48.1
90°-120°	840.8	10.7
90°-150°	3025.2	38.3
90°-180°	4097.0	51.9
0°-180°	7891.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1678	1678	1678	1678	1678	
5°	1678	1671	1655	1666	1665	159
15°	1601	1584	1548	1541	1531	451
25°	1456	1421	1360	1332	1316	669
35°	1260	1209	1127	1070	1044	788
45°	1036	972	870	795	760	799
55°	787	717	604	528	498	705
65°	538	461	357	293	275	532
75°	284	219	144	131	128	303
85°	72	44	38	36	35	81
90°	1	11	24	28	30	6
95°	61	23	31	38	38	75
105°	297	303	219	52	44	315
115°	558	564	573	583	587	551
125°	786	794	798	800	802	702
135°	979	985	989	992	989	754
145°	1130	1137	1139	1141	1141	707
155°	1245	1243	1244	1248	1243	573
165°	1313	1310	1309	1316	1310	371
175°	1344	1339	1340	1346	1338	128
180°	1344	1344	1344	1344	1344	

TEST NUMBER: P332351

CATALOG NUMBER: S123RDIP-S1000D1025U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1678.2	1678.2	1678.2	1678.2	1678.2	1678.2	1678.2	1678.2	1678.2	1678.2	1678.2
2.5°	1683.6	1682.6	1681.7	1680.7	1679.7	1677.8	1674.9	1672.0	1669.1	1666.2	1668.8
5°	1678.2	1676.6	1675.1	1673.6	1672.1	1669.5	1665.9	1662.3	1658.7	1655.0	1657.7
7.5°	1662.6	1661.0	1659.4	1657.7	1656.1	1652.9	1648.2	1643.5	1638.8	1634.1	1635.6
10°	1649.6	1647.5	1645.3	1643.2	1641.1	1637.3	1631.9	1626.4	1621.0	1615.6	1615.9
12.5°	1631.1	1628.7	1626.4	1624.0	1621.6	1617.1	1610.5	1603.8	1597.2	1590.5	1590.3
15°	1600.6	1597.3	1593.9	1590.6	1587.3	1581.4	1572.9	1564.4	1556.0	1547.5	1546.0
17.5°	1562.2	1558.3	1554.5	1550.6	1546.7	1539.4	1528.6	1517.9	1507.1	1496.3	1493.1
20°	1533.9	1529.1	1524.2	1519.4	1514.5	1506.4	1494.9	1483.4	1471.9	1460.4	1456.5
22.5°	1502.3	1496.8	1491.2	1485.6	1480.1	1471.2	1458.9	1446.7	1434.5	1422.3	1417.4
25°	1456.3	1448.8	1441.2	1433.6	1426.1	1415.3	1401.4	1387.5	1373.6	1359.7	1353.3
27.5°	1400.5	1392.2	1383.8	1375.5	1367.1	1355.2	1339.7	1324.2	1308.7	1293.3	1284.4
30°	1362.4	1353.3	1344.3	1335.2	1326.1	1313.1	1296.2	1279.2	1262.3	1245.4	1235.1
32.5°	1324.3	1314.0	1303.7	1293.4	1283.2	1269.1	1251.2	1233.3	1215.3	1197.4	1186.2
35°	1260.3	1249.4	1238.5	1227.7	1216.8	1201.9	1183.2	1164.4	1145.7	1126.9	1113.9
37.5°	1195.5	1183.4	1171.3	1159.2	1147.1	1131.1	1111.1	1091.0	1071.0	1051.0	1036.2
40°	1154.2	1140.9	1127.5	1114.2	1100.9	1083.5	1062.1	1040.6	1019.1	997.6	981.9
42.5°	1107.3	1094.0	1080.7	1067.4	1054.1	1036.4	1014.2	992.0	969.8	947.6	930.4
45°	1035.8	1022.1	1008.5	994.9	981.3	962.9	939.6	916.3	893.0	869.7	852.5
47.5°	964.2	949.2	934.3	919.3	904.4	885.3	862.0	838.7	815.4	792.1	773.4
50°	911.9	897.7	883.5	869.3	855.0	835.7	811.2	786.7	762.2	737.7	718.9
52.5°	865.1	849.7	834.2	818.8	803.4	783.5	759.3	735.0	710.8	686.5	667.0
55°	786.7	771.9	757.0	742.2	727.4	707.1	681.4	655.7	630.0	604.3	586.8
57.5°	714.3	698.1	682.0	665.8	649.7	628.7	602.8	577.0	551.2	525.4	508.8
60°	664.2	647.6	630.9	614.3	597.6	576.8	551.7	526.6	501.5	476.4	460.0
62.5°	614.1	597.5	580.8	564.2	547.6	526.7	501.6	476.5	451.4	426.3	410.9
65°	537.6	521.0	504.3	487.7	471.1	451.0	427.4	403.8	380.2	356.6	341.8
67.5°	461.1	444.3	427.5	410.7	393.9	374.1	351.5	328.9	306.3	283.6	272.6
70°	411.0	394.7	378.4	362.0	345.7	327.0	305.8	284.6	263.4	242.3	231.7
72.5°	360.9	344.9	328.8	312.7	296.6	278.9	259.7	240.5	221.2	202.0	193.3
75°	284.5	269.9	255.4	240.9	226.4	210.8	194.2	177.5	160.9	144.3	141.2
77.5°	214.8	201.6	188.5	175.4	162.3	150.3	139.6	128.9	118.2	107.5	105.9
80°	170.1	157.7	145.3	132.9	120.5	111.2	104.8	98.4	92.1	85.7	84.8
82.5°	127.7	117.0	106.3	95.5	84.8	78.0	75.0	72.1	69.1	66.1	65.2
85°	72.1	65.5	58.8	52.2	45.5	41.7	40.8	39.9	39.0	38.1	37.5
87.5°	26.3	24.1	21.9	19.7	17.5	16.6	17.2	17.8	18.4	18.9	18.9
90°	1.0	3.2	5.4	7.7	9.9	12.4	15.3	18.2	21.1	24.0	24.8
92.5°	18.6	17.9	17.3	16.7	16.1	16.9	19.0	21.2	23.4	25.6	27.0
95°	60.9	51.8	42.7	33.6	24.5	21.2	23.6	26.1	28.5	30.9	32.5
97.5°	122.4	118.3	114.2	110.1	106.0	96.0	80.1	64.1	48.1	32.1	33.9
100°	168.7	173.1	177.6	182.0	186.4	171.3	136.7	102.1	67.5	32.9	34.7
102.5°	221.4	224.6	227.8	231.0	234.2	216.9	179.1	141.3	103.5	65.7	60.2
105°	297.4	299.9	302.3	304.8	307.2	298.4	278.5	258.5	238.6	218.6	179.3
107.5°	377.7	379.7	381.6	383.6	385.5	388.1	391.2	394.4	397.5	400.7	371.9
110°	431.2	433.0	434.7	436.5	438.3	440.4	442.8	445.3	447.7	450.2	442.8

TEST NUMBER: P332351

CATALOG NUMBER: S123RDIP-S1000D1025U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	482.3	483.9	485.5	487.1	488.7	490.7	493.2	495.6	498.0	500.5	500.6
115°	558.0	559.3	560.6	562.0	563.3	565.0	566.9	568.9	570.9	572.9	575.2
117.5°	631.2	632.9	634.5	636.2	637.8	639.1	640.1	641.2	642.2	643.2	645.0
120°	676.7	678.7	680.7	682.7	684.7	686.1	686.7	687.4	688.1	688.7	690.5
122.5°	723.1	724.7	726.3	728.0	729.6	730.9	731.7	732.6	733.4	734.2	735.5
125°	786.5	788.3	790.1	791.9	793.6	795.0	795.9	796.7	797.6	798.5	799.0
127.5°	848.0	849.8	851.6	853.3	855.1	856.5	857.6	858.7	859.7	860.8	861.5
130°	886.4	888.1	889.9	891.7	893.5	894.8	895.7	896.6	897.4	898.3	899.2
132.5°	923.1	924.9	926.6	928.4	930.2	931.4	932.1	932.8	933.6	934.3	935.2
135°	979.2	980.5	981.8	983.2	984.5	985.6	986.5	987.4	988.3	989.2	989.8
137.5°	1027.1	1028.8	1030.5	1032.2	1033.8	1034.9	1035.4	1035.9	1036.4	1036.9	1037.9
140°	1059.0	1060.4	1061.7	1063.0	1064.4	1065.4	1066.0	1066.7	1067.4	1068.0	1068.9
142.5°	1088.6	1089.9	1091.2	1092.6	1093.9	1094.9	1095.6	1096.2	1096.9	1097.6	1098.3
145°	1129.9	1131.5	1133.0	1134.6	1136.1	1137.1	1137.6	1138.0	1138.4	1138.9	1139.3
147.5°	1168.8	1169.9	1170.9	1171.9	1172.9	1173.6	1174.1	1174.5	1175.0	1175.4	1175.9
150°	1192.8	1193.5	1194.1	1194.8	1195.4	1196.0	1196.4	1196.9	1197.3	1197.8	1198.2
152.5°	1214.3	1214.7	1215.0	1215.3	1215.6	1215.9	1216.1	1216.4	1216.7	1216.9	1217.7
155°	1244.7	1244.2	1243.8	1243.4	1242.9	1242.8	1243.0	1243.2	1243.5	1243.7	1244.8
157.5°	1268.2	1268.2	1268.2	1268.1	1268.1	1267.9	1267.7	1267.5	1267.3	1267.0	1268.4
160°	1282.6	1282.4	1282.2	1282.0	1281.7	1281.5	1281.3	1281.1	1280.8	1280.6	1282.0
162.5°	1296.2	1295.6	1295.0	1294.5	1293.9	1293.5	1293.3	1293.0	1292.8	1292.6	1294.1
165°	1312.6	1311.9	1311.2	1310.6	1309.9	1309.5	1309.2	1309.0	1308.8	1308.6	1310.3
167.5°	1325.3	1324.5	1323.6	1322.7	1321.8	1321.3	1321.3	1321.3	1321.3	1321.3	1323.1
170°	1332.5	1331.6	1330.8	1329.9	1329.0	1328.5	1328.5	1328.5	1328.5	1328.5	1330.3
172.5°	1337.3	1336.3	1335.2	1334.1	1333.1	1332.6	1332.8	1333.0	1333.1	1333.3	1335.1
175°	1343.5	1342.4	1341.3	1340.2	1339.1	1338.6	1338.8	1339.1	1339.3	1339.5	1341.1
177.5°	1345.1	1344.2	1343.3	1342.4	1341.6	1341.2	1341.4	1341.6	1341.7	1341.9	1343.3
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5

TEST NUMBER: P332351

CATALOG NUMBER: S123RDIP-S1000D1025U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1678.2	1678.2	1678.2	1678.2	1678.2	1678.2	1678.2	1678.2
2.5°	1671.5	1674.2	1676.8	1677.9	1677.4	1677.0	1676.5	1676.0
5°	1660.5	1663.2	1665.9	1667.0	1666.4	1665.8	1665.2	1664.6
7.5°	1637.1	1638.6	1640.1	1640.4	1639.3	1638.3	1637.3	1636.2
10°	1616.2	1616.5	1616.8	1616.2	1614.6	1613.1	1611.6	1610.1
12.5°	1590.1	1590.0	1589.8	1588.8	1587.1	1585.3	1583.6	1581.8
15°	1544.5	1543.0	1541.5	1539.6	1537.5	1535.4	1533.3	1531.2
17.5°	1489.9	1486.7	1483.5	1480.3	1477.2	1474.0	1470.9	1467.7
20°	1452.5	1448.6	1444.7	1440.9	1437.3	1433.6	1430.0	1426.4
22.5°	1412.5	1407.6	1402.7	1398.5	1395.2	1391.8	1388.4	1385.0
25°	1347.0	1340.6	1334.3	1329.4	1326.1	1322.8	1319.5	1316.1
27.5°	1275.6	1266.8	1257.9	1251.0	1245.9	1240.8	1235.7	1230.7
30°	1224.8	1214.5	1204.2	1196.7	1191.8	1187.0	1182.1	1177.3
32.5°	1174.9	1163.7	1152.4	1144.3	1139.2	1134.1	1129.0	1123.9
35°	1100.9	1087.9	1074.9	1065.7	1060.3	1054.8	1049.4	1043.9
37.5°	1021.5	1006.7	992.0	981.2	974.5	967.8	961.1	954.4
40°	966.2	950.5	934.7	923.4	916.4	909.5	902.5	895.6
42.5°	913.2	896.0	878.8	867.1	860.9	854.7	848.4	842.2
45°	835.2	818.0	800.7	788.5	781.2	774.0	766.7	759.5
47.5°	754.6	735.9	717.1	704.5	698.0	691.6	685.1	678.6
50°	700.2	681.4	662.7	649.8	642.9	635.9	629.0	622.0
52.5°	647.6	628.1	608.6	595.7	589.5	583.3	577.1	570.8
55°	569.2	551.7	534.1	522.3	516.3	510.2	504.2	498.1
57.5°	492.2	475.6	459.1	448.2	443.1	437.9	432.8	427.6
60°	443.7	427.4	411.0	400.3	395.2	390.0	384.9	379.7
62.5°	395.5	380.2	364.8	354.4	349.1	343.7	338.3	332.9
65°	327.0	312.1	297.3	288.2	284.9	281.6	278.3	274.9
67.5°	261.5	250.4	239.4	232.0	228.5	224.9	221.3	217.8
70°	221.1	210.5	199.9	193.0	189.6	186.3	183.0	179.7
72.5°	184.7	176.0	167.4	162.4	161.0	159.6	158.2	156.8
75°	138.2	135.2	132.2	130.4	129.8	129.1	128.5	127.9
77.5°	104.3	102.6	101.0	99.9	99.3	98.7	98.1	97.5
80°	83.9	83.0	82.1	81.4	80.8	80.2	79.5	78.9
82.5°	64.3	63.4	62.5	62.0	61.9	61.8	61.6	61.5
85°	36.9	36.3	35.7	35.4	35.4	35.4	35.4	35.4
87.5°	18.8	18.8	18.7	18.6	18.4	18.3	18.1	18.0
90°	25.7	26.6	27.5	28.2	28.6	29.1	29.5	29.9
92.5°	28.4	29.8	31.2	32.1	32.3	32.6	32.9	33.1
95°	34.0	35.6	37.2	37.9	37.9	37.9	37.9	37.9
97.5°	35.7	37.5	39.2	40.2	40.5	40.7	40.9	41.1
100°	36.5	38.3	40.0	41.0	41.3	41.5	41.7	41.9
102.5°	54.7	49.2	43.7	41.1	41.5	41.9	42.3	42.7
105°	140.1	100.8	61.6	42.1	42.6	43.0	43.5	43.9
107.5°	343.1	314.3	285.5	256.3	226.7	197.1	167.5	137.9
110°	435.5	428.2	420.9	401.4	369.6	337.9	306.2	274.5

TEST NUMBER: P332351

CATALOG NUMBER: S123RDIP-S1000D1025U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	500.7	500.9	501.0	497.7	491.0	484.3	477.6	470.9
115°	577.4	579.6	581.8	583.4	584.2	585.1	586.0	586.9
117.5°	646.8	648.5	650.3	651.3	651.5	651.6	651.8	652.0
120°	692.3	694.0	695.8	696.7	696.7	696.7	696.7	696.7
122.5°	736.7	738.0	739.2	739.9	740.1	740.3	740.4	740.6
125°	799.4	799.8	800.3	800.7	801.2	801.6	802.1	802.5
127.5°	862.2	862.9	863.6	863.8	863.3	862.9	862.4	862.0
130°	900.1	901.0	901.9	902.1	901.7	901.2	900.8	900.3
132.5°	936.0	936.9	937.8	937.9	937.3	936.7	936.1	935.5
135°	990.5	991.2	991.8	991.8	991.2	990.5	989.8	989.2
137.5°	1039.0	1040.1	1041.1	1041.4	1041.0	1040.6	1040.1	1039.7
140°	1069.8	1070.7	1071.6	1071.8	1071.3	1070.9	1070.5	1070.0
142.5°	1099.0	1099.7	1100.4	1100.4	1099.8	1099.2	1098.6	1098.0
145°	1139.8	1140.2	1140.7	1140.9	1140.9	1140.9	1140.9	1140.9
147.5°	1176.3	1176.7	1177.2	1176.9	1175.9	1174.9	1173.8	1172.8
150°	1198.7	1199.1	1199.6	1199.4	1198.8	1198.1	1197.4	1196.8
152.5°	1218.5	1219.3	1220.1	1220.0	1219.0	1218.0	1217.0	1215.9
155°	1245.9	1247.0	1248.1	1248.0	1246.7	1245.4	1244.0	1242.7
157.5°	1269.7	1271.0	1272.4	1272.2	1270.4	1268.7	1267.0	1265.3
160°	1283.3	1284.6	1285.9	1285.8	1284.3	1282.7	1281.2	1279.6
162.5°	1295.6	1297.1	1298.6	1298.7	1297.3	1295.9	1294.6	1293.2
165°	1312.1	1313.9	1315.7	1315.8	1314.2	1312.7	1311.1	1309.6
167.5°	1324.9	1326.7	1328.4	1328.4	1326.7	1324.9	1323.1	1321.3
170°	1332.1	1333.9	1335.6	1335.6	1333.9	1332.1	1330.3	1328.5
172.5°	1336.9	1338.6	1340.4	1340.3	1338.4	1336.4	1334.5	1332.5
175°	1342.6	1344.2	1345.7	1345.6	1343.8	1342.1	1340.3	1338.5
177.5°	1344.7	1346.2	1347.6	1347.4	1345.6	1343.9	1342.1	1340.3
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5

(END OF REPORT)