

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831200

Luminaire Tested: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831200
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-17)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-S1165D1025U935-4F0-1E-UDD-G4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7780.3 lumens
Efficiency: N/A
Efficacy: 114.2 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

Luminous Intensity Polar Plot

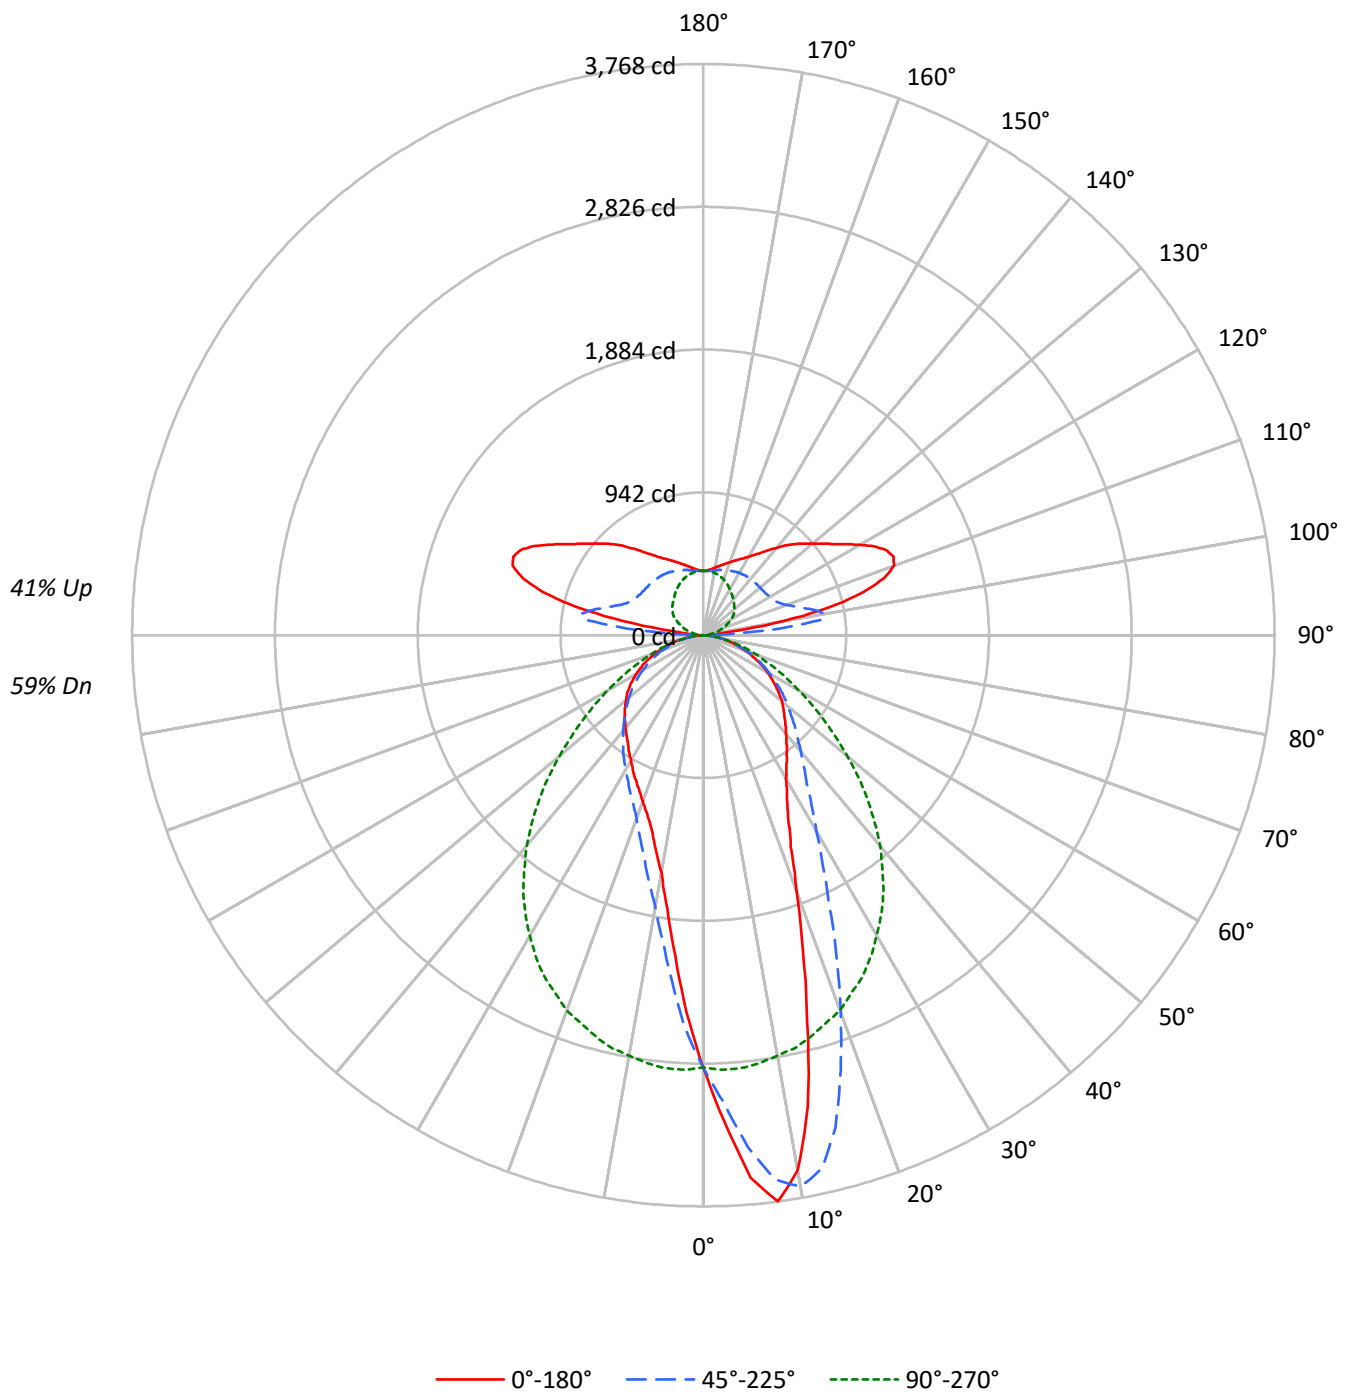

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64
1	100	96	92	89	94	90	87	84	78	76	74	68	66	64	58	57	56
2	92	85	79	74	86	79	74	70	69	66	62	60	57	55	52	50	48
3	84	75	68	63	79	71	64	59	62	57	53	54	50	47	46	44	42
4	78	67	60	54	72	63	56	51	56	50	46	49	45	41	42	39	36
5	72	60	52	47	67	57	50	45	50	45	40	44	40	36	38	35	32
6	66	55	47	41	62	52	44	39	46	40	36	40	36	32	35	32	29
7	62	50	42	37	58	47	40	35	42	36	32	37	32	29	32	29	26
8	58	45	38	33	54	43	36	31	38	33	29	34	30	26	30	27	24
9	54	42	35	30	50	40	33	28	36	30	26	32	27	24	28	24	22
10	50	39	32	27	47	37	30	26	33	28	24	30	25	22	26	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	30697	30697	30697	30697	30697
5°	38821	36641	30972	24959	22936
10°	39198	40384	30766	19896	17386
15°	29524	37494	30556	16848	14703
20°	20570	30340	30166	14734	13355
25°	15686	23332	29500	13556	12526
30°	13570	18537	28439	12722	11859
35°	12590	15650	27215	12121	11390
40°	11920	14039	25493	11547	11231
45°	11523	12994	23307	11100	11160
50°	11323	12166	20719	10692	11102
55°	10903	11560	18179	10306	11151
60°	10512	10910	15668	9944	10968
65°	9875	10297	13517	9556	10753
70°	9120	9517	11493	8913	10121
75°	8255	8530	9852	8284	9245
80°	6806	7463	7792	7221	7792
85°	5397	6052	5718	6126	6212

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°

Vertical Angle: 45°

Luminance: 26612 cd/sqm

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	269.6	3.5
10°-20°	670.7	8.6
20°-30°	794.2	10.2
30°-40°	798.5	10.3
40°-50°	732.6	9.4
50°-60°	604.7	7.8
60°-70°	427.7	5.5
70°-80°	228.3	2.9
80°-90°	60.3	0.8
90°-100°	230.4	3.0
100°-110°	674.5	8.7
110°-120°	658.7	8.5
120°-130°	524.6	6.7
130°-140°	413.9	5.3
140°-150°	308.7	4.0
150°-160°	215.3	2.8
160°-170°	126.5	1.6
170°-180°	41.1	0.5
0°-30°	1734.5	22.3
0°-40°	2533.1	32.6
0°-60°	3870.4	49.7
0°-90°	4586.7	59.0
90°-120°	1563.5	20.1
90°-150°	2810.7	36.1
90°-180°	3194.0	41.1
0°-180°	7780.3	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	2852	2852	2852	2852	2852	
5°	3593	3391	2866	2310	2123	342
15°	2649	3365	2742	1512	1319	732
25°	1321	1964	2484	1141	1055	623
35°	958	1191	2071	922	867	602
45°	757	854	1531	729	733	586
55°	581	616	969	549	594	520
65°	388	404	531	375	422	385
75°	198	205	237	199	222	209
85°	44	49	46	50	50	49
90°	25	22	2	22	25	16
95°	100	510	29	510	100	162
105°	1093	691	100	691	1093	1091
115°	1330	528	176	528	1330	1297
125°	1048	493	245	493	1048	949
135°	850	486	287	486	850	659
145°	664	480	327	480	664	422
155°	551	465	372	465	551	257
165°	480	445	406	445	480	137
175°	432	427	424	427	432	42
180°	425	425	425	425	425	

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8
2.5°	3214.4	3211.1	3207.8	3191.3	3174.7	3166.8	3158.9	3135.0	3111.2	3084.7	3058.3
5°	3592.9	3602.2	3611.4	3600.9	3590.3	3557.8	3525.4	3482.4	3439.4	3391.1	3342.8
7.5°	3767.6	3772.9	3778.2	3771.6	3764.9	3756.3	3747.7	3709.4	3671.0	3621.4	3571.7
10°	3586.3	3598.2	3610.1	3635.9	3661.7	3690.8	3720.0	3714.7	3709.4	3694.8	3680.3
12.5°	3188.0	3202.5	3217.1	3268.7	3320.3	3386.5	3452.6	3509.5	3566.4	3606.1	3645.8
15°	2649.4	2689.7	2730.1	2777.1	2824.0	2921.3	3018.6	3138.3	3258.1	3364.6	3471.2
17.5°	2182.2	2197.4	2212.7	2262.9	2313.2	2435.6	2558.0	2696.3	2834.6	3011.3	3188.0
20°	1795.8	1809.7	1823.6	1889.8	1955.9	2051.9	2147.8	2303.3	2458.8	2648.7	2838.6
22.5°	1508.6	1530.5	1552.3	1589.4	1626.4	1718.4	1810.4	1948.6	2086.9	2296.7	2506.4
25°	1320.7	1336.6	1352.5	1375.0	1397.5	1470.9	1544.4	1658.2	1772.0	1964.5	2157.1
27.5°	1192.3	1199.0	1205.6	1228.1	1250.6	1298.2	1345.9	1443.8	1541.7	1705.1	1868.6
30°	1091.8	1096.4	1101.0	1120.9	1140.7	1173.2	1205.6	1276.4	1347.2	1491.4	1635.7
32.5°	1021.6	1024.9	1028.2	1043.5	1058.7	1081.8	1105.0	1156.6	1208.2	1327.3	1446.4
35°	958.1	960.1	962.1	973.3	984.6	1001.8	1019.0	1058.0	1097.1	1191.0	1285.0
37.5°	902.5	905.2	907.8	914.4	921.1	936.3	951.5	982.6	1013.7	1085.8	1157.9
40°	848.3	852.9	857.5	862.2	866.8	879.4	891.9	915.8	939.6	999.1	1058.7
42.5°	802.0	806.6	811.2	813.2	815.2	822.5	829.7	851.6	873.4	917.7	962.1
45°	757.0	758.9	760.9	762.9	764.9	770.9	776.8	796.0	815.2	853.6	891.9
47.5°	715.9	715.9	715.9	717.3	718.6	723.9	729.2	743.1	757.0	786.7	816.5
50°	676.2	676.2	676.2	674.3	672.3	675.6	678.9	689.5	700.1	726.5	753.0
52.5°	628.6	628.6	628.6	629.3	629.9	629.9	629.9	639.2	648.4	672.3	696.1
55°	581.0	583.6	586.2	584.3	582.3	583.6	584.9	590.9	596.8	616.0	635.2
57.5°	533.3	534.6	536.0	535.3	534.6	535.3	536.0	541.3	546.5	561.1	575.7
60°	488.3	488.3	488.3	487.0	485.7	487.0	488.3	491.0	493.6	506.8	520.1
62.5°	438.0	438.7	439.4	440.0	440.7	439.4	438.0	441.3	444.6	454.6	464.5
65°	387.7	388.4	389.1	391.1	393.0	391.7	390.4	393.7	397.0	404.3	411.6
67.5°	342.7	341.4	340.1	340.8	341.4	343.4	345.4	346.1	346.7	354.7	362.6
70°	289.8	291.1	292.5	291.8	291.1	291.8	292.5	294.4	296.4	302.4	308.3
72.5°	242.2	242.8	243.5	243.5	243.5	244.8	246.1	248.1	250.1	253.4	256.7
75°	198.5	198.5	198.5	199.8	201.2	201.8	202.5	202.5	202.5	205.1	207.8
77.5°	150.9	154.2	157.5	156.8	156.2	157.5	158.8	160.8	162.8	164.1	165.4
80°	109.8	109.8	109.8	110.5	111.2	113.1	115.1	116.5	117.8	120.4	123.1
82.5°	70.1	70.8	71.5	73.4	75.4	76.8	78.1	80.1	82.0	82.0	82.0
85°	43.7	42.3	41.0	42.3	43.7	45.0	46.3	47.0	47.6	49.0	50.3
87.5°	21.2	21.2	21.2	21.2	21.2	21.8	22.5	22.5	22.5	22.5	22.5
90°	24.9	25.8	24.9	24.1	24.9	23.2	22.3	21.5	20.6	21.5	18.9
92.5°	45.5	47.3	46.4	49.8	51.6	57.6	66.2	85.1	119.5	159.9	177.0
95°	99.7	103.1	109.1	116.9	133.2	164.2	209.7	309.4	413.4	509.6	453.8
97.5°	204.5	214.0	234.6	267.3	324.9	422.8	536.3	710.7	810.4	783.8	585.3
100°	538.9	538.0	571.5	634.3	721.1	843.1	943.7	1013.3	983.2	813.9	550.0
102.5°	853.4	878.3	905.0	951.4	1014.1	1080.3	1128.4	1113.8	991.8	758.0	498.5
105°	1093.2	1097.5	1125.0	1157.7	1197.2	1219.5	1203.2	1117.3	937.6	691.0	458.1
107.5°	1249.6	1259.1	1270.2	1285.7	1290.9	1267.7	1200.6	1065.7	860.3	631.7	428.9
110°	1339.0	1340.7	1342.4	1335.6	1311.5	1251.3	1143.0	984.9	788.1	582.7	413.4

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	1357.0	1356.2	1347.6	1322.7	1273.7	1192.0	1067.4	905.0	725.4	550.0	404.8
115°	1329.5	1325.2	1308.1	1270.2	1205.8	1112.1	985.8	836.2	677.2	528.5	403.9
117.5°	1269.4	1263.4	1237.6	1195.5	1128.4	1031.3	915.3	782.9	645.4	513.9	404.8
120°	1190.3	1185.2	1164.5	1116.4	1048.5	961.7	858.6	742.5	621.4	504.5	408.2
122.5°	1116.4	1109.5	1086.3	1044.2	985.8	906.7	813.0	710.7	601.6	498.5	414.2
125°	1048.5	1042.5	1021.0	983.2	928.2	859.4	776.9	683.2	585.3	493.3	420.3
127.5°	990.1	984.9	965.1	932.5	882.6	819.0	743.4	658.3	569.8	490.7	427.1
130°	941.9	935.1	917.0	886.1	840.5	782.1	712.5	635.1	557.8	488.2	434.0
132.5°	894.7	890.4	874.9	844.0	801.8	746.8	683.2	613.6	546.6	487.3	439.2
135°	850.0	844.0	828.5	802.7	760.6	711.6	655.7	594.7	537.1	486.4	444.3
137.5°	802.7	797.6	784.7	758.0	721.9	678.1	628.2	576.7	528.5	484.7	447.8
140°	752.9	753.7	740.0	715.9	683.2	646.3	605.0	561.2	520.8	483.9	451.2
142.5°	706.5	707.3	695.3	674.7	648.0	617.1	582.7	546.6	513.9	482.1	453.8
145°	664.3	662.6	655.7	637.7	616.2	591.3	563.8	535.4	507.9	480.4	454.6
147.5°	628.2	627.4	620.5	607.6	590.4	572.4	549.2	526.0	501.9	477.8	454.6
150°	597.3	597.3	592.1	582.7	569.8	553.5	535.4	515.7	495.9	474.4	454.6
152.5°	571.5	571.5	568.9	560.3	550.9	538.0	522.5	506.2	489.0	470.1	452.1
155°	550.9	550.0	548.3	541.4	533.7	523.4	510.5	496.8	482.1	465.0	450.3
157.5°	531.1	531.1	529.4	524.3	517.4	508.8	498.5	486.4	474.4	460.7	447.8
160°	512.2	513.1	513.1	507.9	501.9	495.9	487.3	477.8	466.7	455.5	446.0
162.5°	495.0	495.9	495.9	491.6	488.2	483.0	475.3	467.5	458.9	450.3	442.6
165°	480.4	480.4	481.3	477.8	474.4	470.1	464.1	458.9	452.1	445.2	439.2
167.5°	465.8	465.8	466.7	464.1	462.4	458.9	455.5	451.2	445.2	440.0	435.7
170°	452.9	452.9	453.8	452.1	451.2	449.5	446.0	443.5	439.2	434.9	432.3
172.5°	440.9	441.7	443.5	441.7	441.7	440.9	438.3	436.6	433.2	430.6	429.7
175°	432.3	433.2	434.0	433.2	433.2	433.2	431.4	430.6	428.9	427.1	427.1
177.5°	426.3	426.3	428.0	427.1	428.0	428.0	427.1	426.3	425.4	424.6	425.4
180°	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8
2.5°	3050.3	3042.4	3013.3	2984.2	2951.1	2918.0	2893.5	2869.0	2832.6	2796.3	2766.5
5°	3305.7	3268.7	3207.2	3145.6	3062.2	2978.9	2922.6	2866.4	2791.0	2715.5	2655.3
7.5°	3508.2	3444.7	3358.7	3272.7	3163.5	3054.3	2951.1	2847.9	2732.7	2617.6	2523.6
10°	3637.2	3594.2	3495.0	3395.7	3249.5	3103.3	2959.0	2814.8	2666.6	2518.3	2394.0
12.5°	3649.8	3653.8	3562.5	3471.2	3305.7	3140.3	2965.0	2789.6	2603.0	2416.4	2271.5
15°	3539.3	3607.5	3557.2	3506.9	3340.2	3173.4	2957.7	2742.0	2526.9	2311.9	2144.5
17.5°	3334.2	3480.4	3487.7	3495.0	3328.2	3161.5	2922.6	2683.8	2440.3	2196.8	2020.8
20°	3054.3	3270.0	3344.1	3418.2	3282.6	3146.9	2890.2	2633.5	2360.9	2088.3	1903.6
22.5°	2768.5	3030.5	3166.1	3301.8	3201.2	3100.6	2827.4	2554.1	2266.2	1978.4	1791.2
25°	2442.9	2728.8	2937.2	3145.6	3084.1	3022.5	2753.2	2483.9	2177.6	1871.2	1680.0
27.5°	2159.1	2449.5	2701.0	2952.4	2939.2	2925.9	2658.6	2391.3	2077.7	1764.0	1579.4
30°	1906.3	2176.9	2458.1	2739.3	2771.8	2804.2	2546.1	2288.1	1973.8	1659.5	1481.5
32.5°	1682.6	1918.9	2220.6	2522.3	2585.8	2649.4	2416.4	2183.5	1872.5	1561.6	1390.2
35°	1499.4	1713.7	2015.5	2317.2	2396.6	2476.0	2273.5	2071.1	1768.0	1465.0	1301.5
37.5°	1337.3	1516.6	1811.0	2105.5	2202.7	2300.0	2118.7	1937.4	1653.5	1369.7	1219.5
40°	1202.9	1347.2	1617.8	1888.4	2000.9	2113.4	1963.9	1814.3	1545.0	1275.7	1137.4
42.5°	1090.4	1218.8	1464.3	1709.8	1817.6	1925.5	1799.1	1672.7	1433.2	1193.7	1067.3
45°	994.5	1097.1	1320.0	1543.0	1645.6	1748.2	1639.6	1531.1	1320.0	1109.0	991.2
47.5°	904.5	992.5	1183.1	1373.6	1465.0	1556.3	1471.6	1386.9	1208.2	1029.6	923.0
50°	823.8	894.6	1061.3	1228.1	1307.5	1386.9	1312.1	1237.3	1090.4	943.6	850.9
52.5°	753.7	811.2	950.8	1090.4	1158.6	1226.8	1162.6	1098.4	981.9	865.5	784.8
55°	684.2	733.1	854.2	975.3	1021.6	1067.9	1018.3	968.7	874.7	780.8	712.6
57.5°	619.3	663.0	762.3	861.5	897.2	933.0	888.0	843.0	772.2	701.4	644.5
60°	555.8	591.5	674.3	757.0	778.8	800.6	764.2	727.8	678.2	628.6	577.6
62.5°	496.9	529.3	590.9	652.4	667.0	681.5	653.7	625.9	588.2	550.5	510.8
65°	436.0	460.5	510.8	561.1	570.4	579.6	555.1	530.7	502.2	473.8	444.6
67.5°	379.8	397.0	438.0	479.1	479.7	480.4	460.5	440.7	424.8	408.9	385.8
70°	324.9	341.4	368.6	395.7	396.3	397.0	381.1	365.2	353.3	341.4	324.2
72.5°	268.6	280.6	301.1	321.6	320.3	318.9	309.0	299.1	289.8	280.6	268.0
75°	217.7	227.6	241.5	255.4	251.4	247.5	242.2	236.9	228.9	221.0	213.1
77.5°	171.4	177.3	185.3	193.2	190.6	187.9	183.3	178.7	172.7	166.7	163.4
80°	125.7	128.4	133.7	139.0	137.6	136.3	131.0	125.7	124.4	123.1	118.4
82.5°	85.4	88.7	90.0	91.3	90.6	90.0	86.0	82.0	80.7	79.4	78.7
85°	50.9	51.6	52.3	52.9	50.9	49.0	47.6	46.3	46.3	46.3	45.7
87.5°	23.2	23.8	23.8	23.8	23.2	22.5	21.2	19.9	20.5	21.2	21.2
90°	16.3	13.8	11.2	9.5	7.7	5.2	3.4	1.7	3.4	5.2	7.7
92.5°	132.4	86.8	59.3	43.8	35.2	27.5	18.9	12.9	18.9	27.5	35.2
95°	312.8	184.8	111.7	78.2	55.9	41.3	31.8	29.2	31.8	41.3	55.9
97.5°	348.1	199.4	127.2	90.2	67.9	55.0	47.3	46.4	47.3	55.0	67.9
100°	324.0	196.8	136.6	103.1	82.5	70.5	64.5	63.6	64.5	70.5	82.5
102.5°	303.4	200.2	147.8	117.7	99.7	88.5	83.4	81.6	83.4	88.5	99.7
105°	295.6	207.1	160.7	134.1	117.7	107.4	102.3	99.7	102.3	107.4	117.7
107.5°	293.9	218.3	177.0	152.1	136.6	126.3	121.2	118.6	121.2	126.3	136.6
110°	298.2	232.9	194.2	170.2	155.6	146.1	141.8	139.2	141.8	146.1	155.6

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	306.8	247.5	212.3	189.1	174.5	165.0	160.7	158.1	160.7	165.0	174.5
115°	316.3	263.8	231.2	208.0	193.4	184.8	179.6	176.2	179.6	184.8	193.4
117.5°	328.3	281.0	248.4	226.9	210.6	202.8	198.5	194.2	198.5	202.8	210.6
120°	342.1	297.4	266.4	244.9	228.6	220.0	215.7	213.1	215.7	220.0	228.6
122.5°	354.9	314.6	284.5	261.3	245.8	236.3	232.0	229.5	232.0	236.3	245.8
125°	368.7	330.9	300.8	277.6	261.3	251.8	246.7	244.9	246.7	251.8	261.3
127.5°	379.9	345.5	316.3	293.1	275.0	265.6	259.5	257.0	259.5	265.6	275.0
130°	391.0	358.4	330.0	306.8	288.8	278.5	270.7	268.1	270.7	278.5	288.8
132.5°	401.4	369.6	342.1	319.7	301.7	288.8	280.2	276.7	280.2	288.8	301.7
135°	409.9	380.7	354.1	330.9	312.8	299.9	290.5	287.0	290.5	299.9	312.8
137.5°	416.8	388.5	362.7	341.2	323.1	309.4	299.9	296.5	299.9	309.4	323.1
140°	422.0	396.2	371.3	349.8	332.6	318.8	310.3	306.0	310.3	318.8	332.6
142.5°	427.1	402.2	378.1	358.4	341.2	329.2	319.7	316.3	319.7	329.2	341.2
145°	430.6	407.4	385.0	365.3	350.6	337.8	330.0	327.4	330.0	337.8	350.6
147.5°	433.2	411.7	391.0	373.9	359.2	348.1	340.3	338.6	340.3	348.1	359.2
150°	434.0	416.0	396.2	380.7	368.7	357.5	350.6	349.8	350.6	357.5	368.7
152.5°	435.7	418.5	402.2	387.6	377.3	367.8	361.0	361.0	361.0	367.8	377.3
155°	435.7	422.0	407.4	395.3	385.9	377.3	372.1	372.1	372.1	377.3	385.9
157.5°	436.6	423.7	411.7	402.2	393.6	385.9	381.6	380.7	381.6	385.9	393.6
160°	436.6	426.3	416.0	407.4	401.4	394.5	391.0	391.0	391.0	394.5	401.4
162.5°	435.7	427.1	418.5	411.7	406.5	401.4	398.8	398.8	398.8	401.4	406.5
165°	434.0	428.0	421.1	415.1	411.7	407.4	405.7	406.5	405.7	407.4	411.7
167.5°	433.2	428.0	422.8	418.5	416.0	412.5	411.7	412.5	411.7	412.5	416.0
170°	430.6	427.1	422.8	421.1	419.4	416.8	416.0	417.7	416.0	416.8	419.4
172.5°	429.7	427.1	423.7	422.8	422.0	420.3	420.3	421.1	420.3	420.3	422.0
175°	428.0	426.3	424.6	423.7	423.7	422.0	422.8	423.7	422.8	422.0	423.7
177.5°	427.1	425.4	424.6	424.6	424.6	423.7	424.6	425.4	424.6	423.7	424.6
180°	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8	2851.8
2.5°	2736.7	2710.9	2685.1	2665.2	2645.4	2611.6	2577.9	2570.0	2562.0	2550.8	2539.5
5°	2595.1	2531.6	2468.1	2411.2	2354.3	2309.9	2265.6	2236.5	2207.4	2186.2	2165.0
7.5°	2429.7	2334.4	2239.1	2171.6	2104.1	2040.0	1975.8	1955.3	1934.7	1907.0	1879.2
10°	2269.6	2164.3	2059.1	1971.1	1883.1	1820.3	1757.4	1732.3	1707.1	1672.1	1637.0
12.5°	2126.6	2011.5	1896.4	1807.7	1719.0	1658.2	1597.3	1560.9	1524.5	1504.7	1484.8
15°	1977.1	1854.0	1731.0	1648.9	1566.9	1511.9	1457.0	1425.3	1393.5	1374.3	1355.1
17.5°	1844.8	1723.0	1601.3	1522.5	1443.8	1393.5	1343.2	1315.4	1287.6	1273.1	1258.5
20°	1719.0	1599.9	1480.8	1404.1	1327.3	1286.3	1245.3	1227.4	1209.5	1197.6	1185.7
22.5°	1603.9	1486.8	1369.7	1304.2	1238.7	1205.6	1172.5	1159.9	1147.4	1137.4	1127.5
25°	1488.8	1384.2	1279.7	1224.1	1168.5	1141.4	1114.3	1101.7	1089.1	1079.2	1069.3
27.5°	1394.8	1294.9	1195.0	1147.4	1099.7	1078.5	1057.4	1047.4	1037.5	1028.2	1019.0
30°	1303.5	1214.2	1124.9	1083.8	1042.8	1023.6	1004.4	994.5	984.6	976.0	967.4
32.5°	1218.8	1142.1	1065.3	1027.6	989.9	974.0	958.1	946.2	934.3	927.7	921.1
35°	1138.1	1069.3	1000.5	969.4	938.3	922.4	906.5	896.6	886.6	881.4	876.1
37.5°	1069.3	1007.7	946.2	916.4	886.6	871.4	856.2	847.6	839.0	837.0	835.0
40°	999.1	946.2	893.3	864.2	835.0	821.8	808.6	803.3	798.0	796.7	795.3
42.5°	940.9	889.3	837.7	811.2	784.8	773.5	762.3	759.6	757.0	758.9	760.9
45°	873.4	830.4	787.4	762.9	738.4	729.2	719.9	717.9	715.9	719.9	723.9
47.5°	816.5	776.8	737.1	714.0	690.8	684.2	677.6	676.9	676.2	681.5	686.8
50°	758.3	719.9	681.5	663.0	644.5	638.5	632.6	634.5	636.5	645.1	653.7
52.5°	704.0	668.3	632.6	615.4	598.2	594.2	590.2	594.8	599.5	608.7	618.0
55°	644.5	612.1	579.6	566.4	553.2	549.2	545.2	554.5	563.7	572.4	581.0
57.5°	587.6	559.1	530.7	518.8	506.8	506.2	505.5	514.1	522.7	532.0	541.3
60°	526.7	502.9	479.1	469.8	460.5	461.9	463.2	473.1	483.0	490.3	497.6
62.5°	471.1	451.3	431.4	422.8	414.2	417.5	420.8	430.8	440.7	449.3	457.9
65°	415.5	399.0	382.5	376.5	370.5	375.2	379.8	388.4	397.0	403.0	408.9
67.5°	362.6	348.7	334.8	330.2	325.5	330.2	334.8	343.4	352.0	358.0	363.9
70°	307.0	295.8	284.5	281.2	277.9	283.2	288.5	295.8	303.0	309.0	315.0
72.5°	255.4	246.8	238.2	237.5	236.9	241.5	246.1	253.4	260.7	264.7	268.6
75°	205.1	200.5	195.9	195.2	194.5	199.2	203.8	207.8	211.7	215.0	218.4
77.5°	160.1	156.2	152.2	152.8	153.5	156.8	160.1	164.1	168.1	170.1	172.0
80°	113.8	112.5	111.2	112.5	113.8	116.5	119.1	121.7	124.4	125.7	127.0
82.5°	78.1	76.8	75.4	77.4	79.4	81.4	83.4	85.4	87.3	88.0	88.7
85°	45.0	47.0	49.0	49.0	49.0	49.6	50.3	50.9	51.6	50.9	50.3
87.5°	21.2	21.8	22.5	22.5	22.5	23.2	23.8	23.8	23.8	23.2	22.5
90°	9.5	11.2	13.8	16.3	18.9	21.5	20.6	21.5	22.3	23.2	24.9
92.5°	43.8	59.3	86.8	132.4	177.0	159.9	119.5	85.1	66.2	57.6	51.6
95°	78.2	111.7	184.8	312.8	453.8	509.6	413.4	309.4	209.7	164.2	133.2
97.5°	90.2	127.2	199.4	348.1	585.3	783.8	810.4	710.7	536.3	422.8	324.9
100°	103.1	136.6	196.8	324.0	550.0	813.9	983.2	1013.3	943.7	843.1	721.1
102.5°	117.7	147.8	200.2	303.4	498.5	758.0	991.8	1113.8	1128.4	1080.3	1014.1
105°	134.1	160.7	207.1	295.6	458.1	691.0	937.6	1117.3	1203.2	1219.5	1197.2
107.5°	152.1	177.0	218.3	293.9	428.9	631.7	860.3	1065.7	1200.6	1267.7	1290.9
110°	170.2	194.2	232.9	298.2	413.4	582.7	788.1	984.9	1143.0	1251.3	1311.5

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	189.1	212.3	247.5	306.8	404.8	550.0	725.4	905.0	1067.4	1192.0	1273.7
115°	208.0	231.2	263.8	316.3	403.9	528.5	677.2	836.2	985.8	1112.1	1205.8
117.5°	226.9	248.4	281.0	328.3	404.8	513.9	645.4	782.9	915.3	1031.3	1128.4
120°	244.9	266.4	297.4	342.1	408.2	504.5	621.4	742.5	858.6	961.7	1048.5
122.5°	261.3	284.5	314.6	354.9	414.2	498.5	601.6	710.7	813.0	906.7	985.8
125°	277.6	300.8	330.9	368.7	420.3	493.3	585.3	683.2	776.9	859.4	928.2
127.5°	293.1	316.3	345.5	379.9	427.1	490.7	569.8	658.3	743.4	819.0	882.6
130°	306.8	330.0	358.4	391.0	434.0	488.2	557.8	635.1	712.5	782.1	840.5
132.5°	319.7	342.1	369.6	401.4	439.2	487.3	546.6	613.6	683.2	746.8	801.8
135°	330.9	354.1	380.7	409.9	444.3	486.4	537.1	594.7	655.7	711.6	760.6
137.5°	341.2	362.7	388.5	416.8	447.8	484.7	528.5	576.7	628.2	678.1	721.9
140°	349.8	371.3	396.2	422.0	451.2	483.9	520.8	561.2	605.0	646.3	683.2
142.5°	358.4	378.1	402.2	427.1	453.8	482.1	513.9	546.6	582.7	617.1	648.0
145°	365.3	385.0	407.4	430.6	454.6	480.4	507.9	535.4	563.8	591.3	616.2
147.5°	373.9	391.0	411.7	433.2	454.6	477.8	501.9	526.0	549.2	572.4	590.4
150°	380.7	396.2	416.0	434.0	454.6	474.4	495.9	515.7	535.4	553.5	569.8
152.5°	387.6	402.2	418.5	435.7	452.1	470.1	489.0	506.2	522.5	538.0	550.9
155°	395.3	407.4	422.0	435.7	450.3	465.0	482.1	496.8	510.5	523.4	533.7
157.5°	402.2	411.7	423.7	436.6	447.8	460.7	474.4	486.4	498.5	508.8	517.4
160°	407.4	416.0	426.3	436.6	446.0	455.5	466.7	477.8	487.3	495.9	501.9
162.5°	411.7	418.5	427.1	435.7	442.6	450.3	458.9	467.5	475.3	483.0	488.2
165°	415.1	421.1	428.0	434.0	439.2	445.2	452.1	458.9	464.1	470.1	474.4
167.5°	418.5	422.8	428.0	433.2	435.7	440.0	445.2	451.2	455.5	458.9	462.4
170°	421.1	422.8	427.1	430.6	432.3	434.9	439.2	443.5	446.0	449.5	451.2
172.5°	422.8	423.7	427.1	429.7	429.7	430.6	433.2	436.6	438.3	440.9	441.7
175°	423.7	424.6	426.3	428.0	427.1	427.1	428.9	430.6	431.4	433.2	433.2
177.5°	424.6	424.6	425.4	427.1	425.4	424.6	425.4	426.3	427.1	428.0	428.0
180°	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	2851.8	2851.8	2851.8	2851.8
2.5°	2534.9	2530.3	2511.7	2493.2
5°	2149.1	2133.3	2128.0	2122.7
7.5°	1877.8	1876.5	1848.7	1820.9
10°	1639.0	1641.0	1615.8	1590.7
12.5°	1468.3	1451.7	1449.7	1447.8
15°	1339.9	1324.7	1322.0	1319.4
17.5°	1249.2	1240.0	1237.3	1234.7
20°	1180.4	1175.1	1170.5	1165.9
22.5°	1120.9	1114.3	1110.3	1106.3
25°	1063.3	1057.4	1056.0	1054.7
27.5°	1011.7	1004.4	1004.4	1004.4
30°	962.7	958.1	956.1	954.1
32.5°	917.1	913.1	913.1	913.1
35°	874.1	872.1	869.4	866.8
37.5°	835.0	835.0	833.7	832.4
40°	797.3	799.3	799.3	799.3
42.5°	762.9	764.9	764.9	764.9
45°	727.2	730.5	731.8	733.1
47.5°	692.1	697.4	698.7	700.1
50°	657.7	661.7	662.3	663.0
52.5°	622.6	627.3	630.6	633.9
55°	585.6	590.2	592.2	594.2
57.5°	545.9	550.5	551.2	551.8
60°	502.2	506.8	508.2	509.5
62.5°	460.5	463.2	464.5	465.8
65°	412.9	416.9	419.5	422.2
67.5°	367.2	370.5	370.5	370.5
70°	316.3	317.6	319.6	321.6
72.5°	269.3	270.0	270.0	270.0
75°	219.7	221.0	221.7	222.3
77.5°	172.7	173.4	173.4	173.4
80°	126.4	125.7	125.7	125.7
82.5°	86.7	84.7	84.7	84.7
85°	49.6	49.0	49.6	50.3
87.5°	22.5	22.5	22.5	22.5
90°	24.1	24.9	25.8	24.9
92.5°	49.8	46.4	47.3	45.5
95°	116.9	109.1	103.1	99.7
97.5°	267.3	234.6	214.0	204.5
100°	634.3	571.5	538.0	538.9
102.5°	951.4	905.0	878.3	853.4
105°	1157.7	1125.0	1097.5	1093.2
107.5°	1285.7	1270.2	1259.1	1249.6
110°	1335.6	1342.4	1340.7	1339.0

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	1322.7	1347.6	1356.2	1357.0
115°	1270.2	1308.1	1325.2	1329.5
117.5°	1195.5	1237.6	1263.4	1269.4
120°	1116.4	1164.5	1185.2	1190.3
122.5°	1044.2	1086.3	1109.5	1116.4
125°	983.2	1021.0	1042.5	1048.5
127.5°	932.5	965.1	984.9	990.1
130°	886.1	917.0	935.1	941.9
132.5°	844.0	874.9	890.4	894.7
135°	802.7	828.5	844.0	850.0
137.5°	758.0	784.7	797.6	802.7
140°	715.9	740.0	753.7	752.9
142.5°	674.7	695.3	707.3	706.5
145°	637.7	655.7	662.6	664.3
147.5°	607.6	620.5	627.4	628.2
150°	582.7	592.1	597.3	597.3
152.5°	560.3	568.9	571.5	571.5
155°	541.4	548.3	550.0	550.9
157.5°	524.3	529.4	531.1	531.1
160°	507.9	513.1	513.1	512.2
162.5°	491.6	495.9	495.9	495.0
165°	477.8	481.3	480.4	480.4
167.5°	464.1	466.7	465.8	465.8
170°	452.1	453.8	452.9	452.9
172.5°	441.7	443.5	441.7	440.9
175°	433.2	434.0	433.2	432.3
177.5°	427.1	428.0	426.3	426.3
180°	424.6	424.6	424.6	424.6

TEST NUMBER: P831200

CATALOG NUMBER: S123DIP-S1165D1025U935-4F0-1E-UDD-G4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.26	17.17	17.15	18.07	19.21	18.50	19.40	19.38	20.30	21.44
	3H	17.91	18.72	18.81	19.63	20.80	19.93	20.74	20.82	21.64	22.81
	4H	18.49	19.26	19.40	20.17	21.35	20.38	21.14	21.29	22.06	23.23
	6H	18.86	19.57	19.79	20.49	21.68	20.66	21.36	21.58	22.28	23.47
	8H	18.96	19.63	19.89	20.57	21.76	20.72	21.39	21.65	22.33	23.51
	12H	19.01	19.65	19.95	20.58	21.79	20.74	21.38	21.68	22.31	23.52
4H	2H	16.84	17.61	17.76	18.52	19.70	18.67	19.43	19.59	20.35	21.52
	3H	18.68	19.31	19.60	20.26	21.45	20.29	20.93	21.22	21.87	23.06
	4H	19.38	19.95	20.31	20.89	22.11	20.88	21.46	21.81	22.40	23.61
	6H	19.85	20.35	20.80	21.32	22.53	21.28	21.78	22.23	22.75	23.96
	8H	19.99	20.46	20.94	21.41	22.64	21.40	21.86	22.35	22.82	24.05
	12H	20.06	20.48	21.03	21.45	22.69	21.44	21.86	22.41	22.84	24.07
8H	4H	19.64	20.11	20.60	21.07	22.30	20.98	21.45	21.94	22.41	23.64
	6H	20.23	20.62	21.21	21.62	22.85	21.49	21.87	22.47	22.87	24.10
	8H	20.44	20.78	21.43	21.77	23.02	21.67	22.01	22.66	23.00	24.24
	12H	20.57	20.87	21.56	21.85	23.14	21.77	22.07	22.76	23.05	24.35
12H	4H	19.65	20.07	20.62	21.04	22.28	20.96	21.38	21.93	22.36	23.59
	6H	20.29	20.62	21.27	21.61	22.86	21.50	21.84	22.49	22.83	24.08
	8H	20.52	20.82	21.51	21.80	23.10	21.70	22.00	22.69	22.98	24.28

END OF REPORT