

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331945-940

Luminaire Tested: **S123DIP-S560D1025U940-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331945-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S560D1025U940-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5378.6 lumens
Efficiency: N/A
Efficacy: 120.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 44.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331945-940

CATALOG NUMBER: S123DIP-S560D1025U940-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

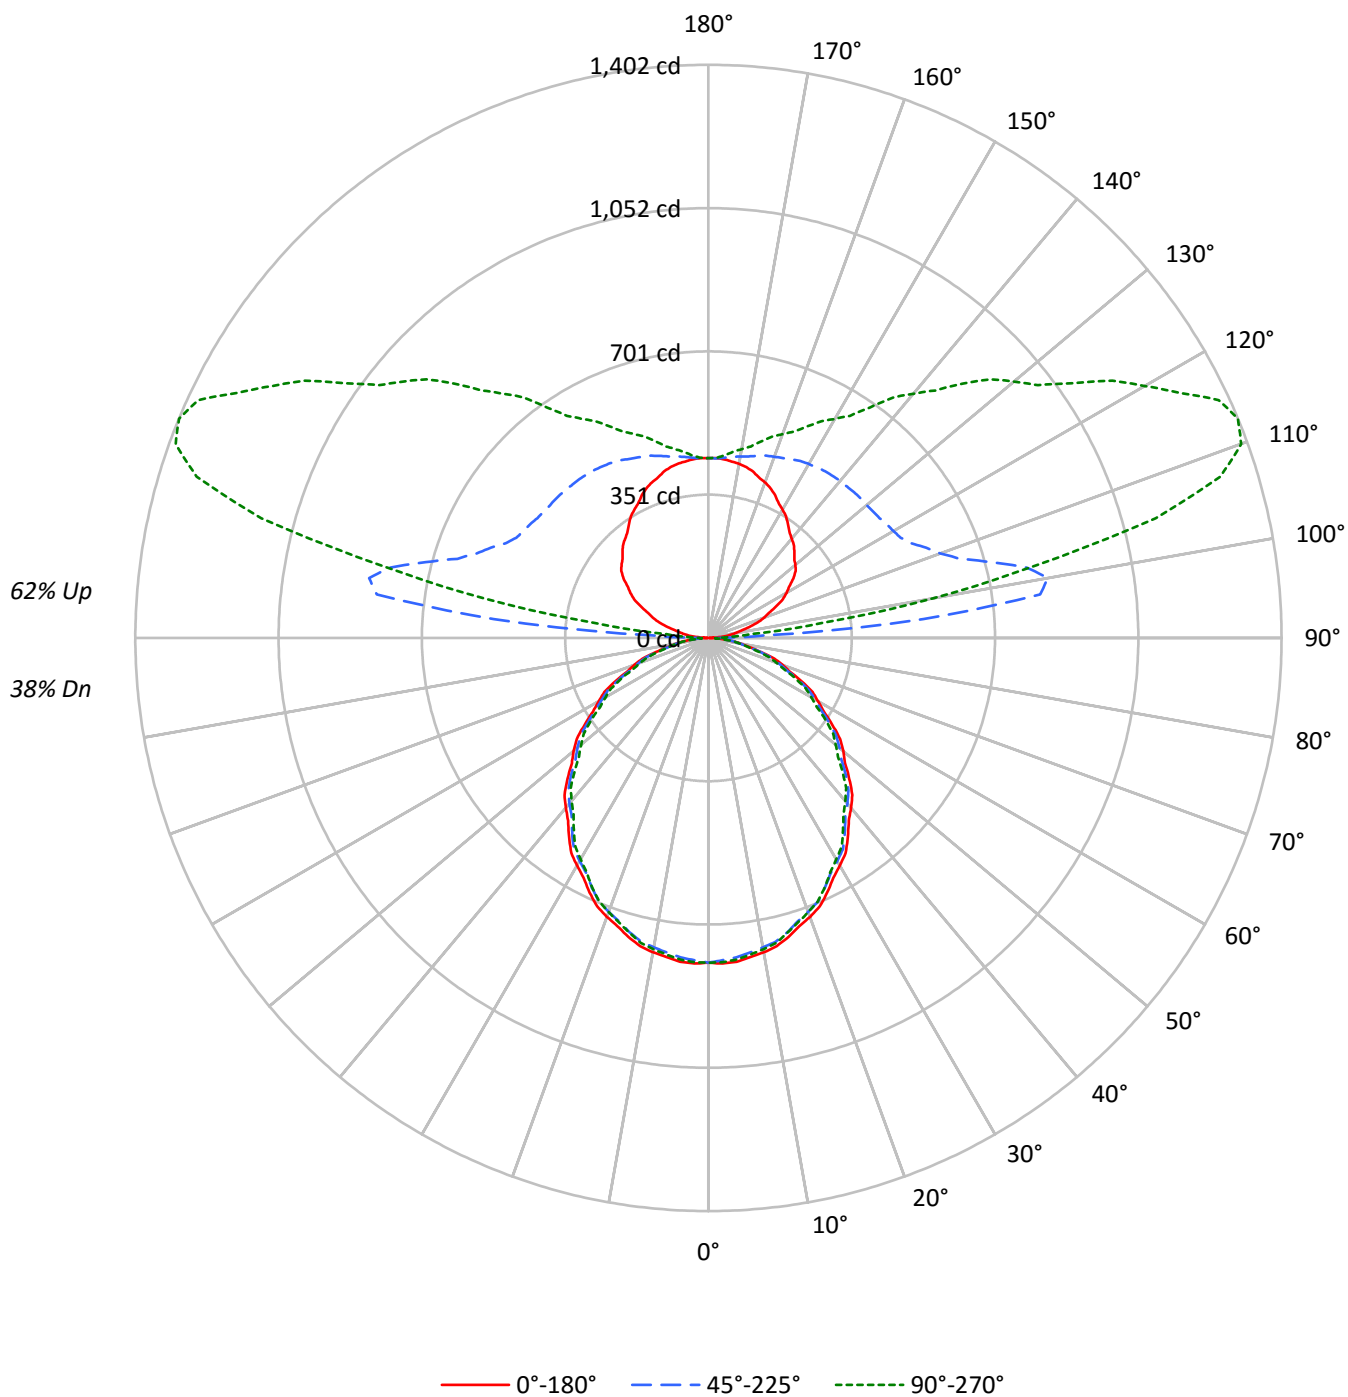

TEST NUMBER: P331945-940

CATALOG NUMBER: S123DIP-S560D1025U940-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46
1	95	91	87	84	86	83	79	76	67	65	63	53	52	50	40	39	38
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32
3	79	70	62	57	71	63	57	52	52	47	44	41	38	35	31	29	27
4	72	62	54	48	65	56	49	44	46	41	37	37	33	30	28	26	24
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	20
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18
7	56	44	36	31	51	40	34	29	33	28	24	27	23	20	21	18	16
8	52	40	32	27	47	37	30	25	30	25	22	25	21	18	19	16	14
9	48	36	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13
10	45	33	26	22	41	31	24	20	26	21	17	21	17	14	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8551	8551	8551
5°	8590	8473	8532
10°	8534	8400	8451
15°	8433	8304	8320
20°	8317	8168	8176
25°	8162	8007	7991
30°	7988	7828	7768
35°	7808	7638	7540
40°	7620	7429	7314
45°	7415	7237	7060
50°	7206	7000	6805
55°	6934	6756	6549
60°	6661	6469	6265
65°	6421	6159	5968
70°	6061	5803	5545
75°	5540	5340	5115
80°	4996	4785	4742
85°	4384	4224	4051

TEST NUMBER: P331945-940

CATALOG NUMBER: S123DIP-S560D1025U940-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	74.8	1.4
10°-20°	211.3	3.9
20°-30°	312.1	5.8
30°-40°	364.6	6.8
40°-50°	366.5	6.8
50°-60°	322.0	6.0
60°-70°	239.9	4.5
70°-80°	136.7	2.5
80°-90°	42.6	0.8
90°-100°	244.7	4.5
100°-110°	692.9	12.9
110°-120°	681.6	12.7
120°-130°	543.7	10.1
130°-140°	428.7	8.0
140°-150°	319.9	5.9
150°-160°	223.0	4.1
160°-170°	131.0	2.4
170°-180°	42.6	0.8
0°-30°	598.2	11.1
0°-40°	962.8	17.9
0°-60°	1651.3	30.7
0°-90°	2070.5	38.5
90°-120°	1619.2	30.1
90°-150°	2911.5	54.1
90°-180°	3308.0	61.5
0°-180°	5378.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	794	794	794	794	794	
5°	795	791	784	791	790	75
15°	757	754	745	750	747	213
25°	687	683	674	675	673	316
35°	594	590	581	577	574	372
45°	487	484	475	467	464	376
55°	370	368	360	353	349	331
65°	252	248	242	236	234	249
75°	133	131	128	125	123	142
85°	36	34	34	33	33	39
90°	2	11	22	25	26	4
95°	30	98	528	154	103	33
105°	103	153	716	1251	1132	110
115°	182	227	547	1200	1377	181
125°	254	300	511	926	1086	225
135°	297	355	504	762	880	230
145°	339	389	498	625	688	213
155°	385	416	482	547	570	177
165°	421	433	461	489	498	119
175°	439	439	442	449	448	42
180°	440	440	440	440	440	

TEST NUMBER: P331945-940

CATALOG NUMBER: S123DIP-S560D1025U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4
2.5°	797.1	796.7	796.2	795.7	795.2	794.2	792.9	791.6	790.3	789.0	790.1
5°	795.0	794.3	793.5	792.8	792.0	790.9	789.2	787.5	785.9	784.2	785.7
7.5°	787.3	786.6	785.8	785.1	784.3	783.0	781.3	779.5	777.8	776.1	777.5
10°	780.8	780.0	779.3	778.5	777.8	776.3	774.4	772.4	770.4	768.5	769.8
12.5°	772.0	771.3	770.7	770.1	769.5	768.2	766.3	764.5	762.7	760.8	761.8
15°	756.8	756.3	755.6	755.0	754.4	753.1	751.2	749.2	747.2	745.2	746.5
17.5°	739.2	738.4	737.6	736.8	736.0	734.7	732.7	730.8	728.8	726.7	727.6
20°	726.1	725.2	724.2	723.4	722.5	721.0	719.1	717.1	715.1	713.1	713.7
22.5°	711.3	710.4	709.5	708.6	707.7	706.2	704.3	702.3	700.3	698.4	698.8
25°	687.2	686.3	685.4	684.5	683.5	682.1	680.1	678.1	676.2	674.2	674.3
27.5°	661.4	660.5	659.6	658.7	657.8	656.3	654.2	652.1	650.0	647.8	647.9
30°	642.7	642.0	641.2	640.5	639.7	638.3	636.1	634.0	632.0	629.8	629.8
32.5°	624.2	623.2	622.1	621.2	620.2	618.8	617.2	615.5	613.9	612.3	611.4
35°	594.2	593.3	592.5	591.6	590.7	589.2	587.2	585.2	583.3	581.3	580.4
37.5°	563.7	562.5	561.3	560.2	559.0	557.5	555.4	553.5	551.4	549.5	548.4
40°	542.3	541.4	540.6	539.7	538.7	537.2	535.0	533.0	530.8	528.7	527.4
42.5°	521.0	520.0	519.0	517.9	516.9	515.3	513.2	511.1	509.0	506.8	505.6
45°	487.1	486.4	485.8	485.2	484.6	483.3	481.3	479.4	477.4	475.4	473.6
47.5°	453.3	452.4	451.6	450.7	449.8	448.4	446.6	444.7	442.8	441.0	439.2
50°	430.3	429.5	428.8	428.0	427.3	426.0	423.9	422.0	420.0	418.0	416.3
52.5°	406.3	405.7	405.3	404.7	404.2	402.9	400.8	398.8	396.6	394.6	393.2
55°	369.5	369.3	369.3	369.1	368.9	367.8	365.9	363.9	361.9	360.0	358.3
57.5°	334.6	334.0	333.5	333.1	332.5	331.4	329.8	328.3	326.7	325.1	323.7
60°	309.4	309.2	309.2	309.0	308.8	307.8	306.0	304.2	302.4	300.5	299.2
62.5°	287.0	286.6	286.2	285.9	285.4	284.4	282.5	280.7	278.8	277.1	275.7
65°	252.1	251.3	250.6	249.8	249.1	247.9	246.4	244.9	243.3	241.8	240.6
67.5°	215.0	214.4	213.7	213.0	212.3	211.4	210.3	209.1	207.9	206.9	205.8
70°	192.6	191.7	190.8	189.9	189.0	188.1	187.2	186.3	185.3	184.4	183.3
72.5°	169.2	168.4	167.8	167.1	166.5	165.6	164.6	163.5	162.5	161.5	160.5
75°	133.2	132.6	132.0	131.3	130.8	130.3	129.7	129.3	128.9	128.4	127.7
77.5°	101.4	101.0	100.7	100.4	100.0	99.6	99.1	98.5	97.9	97.4	96.9
80°	80.6	80.2	79.7	79.3	78.7	78.4	78.1	77.8	77.5	77.2	77.0
82.5°	60.4	60.3	60.2	60.1	60.0	59.9	59.9	59.8	59.7	59.7	59.4
85°	35.5	35.2	35.0	34.6	34.3	34.2	34.2	34.2	34.2	34.2	33.9
87.5°	14.5	14.5	14.5	14.7	14.7	14.8	15.2	15.6	16.1	16.5	16.1
90°	1.8	3.6	5.4	8.0	9.8	11.6	14.3	16.9	19.6	22.3	21.4
92.5°	11.1	16.4	23.9	30.8	38.3	51.5	74.7	113.1	150.6	136.9	103.3
95°	30.2	32.9	42.7	57.9	81.0	115.7	191.4	324.0	469.9	527.8	428.1
97.5°	51.6	52.5	60.2	73.3	96.1	133.7	206.0	355.5	598.9	818.0	875.1
100°	65.9	66.8	73.0	85.4	106.8	141.5	203.8	335.6	569.6	842.9	1018.2
102.5°	80.8	82.4	87.9	99.7	119.0	150.8	206.7	318.4	526.9	796.7	1025.4
105°	103.3	105.9	111.3	122.0	138.8	166.5	214.5	306.2	474.4	715.6	971.1
107.5°	127.1	129.7	134.9	145.4	161.3	186.9	229.1	305.3	441.0	644.1	876.0
110°	144.2	146.9	151.3	161.1	176.2	201.2	241.2	308.9	428.1	603.5	816.2

TEST NUMBER: P331945-940

CATALOG NUMBER: S123DIP-S560D1025U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	159.9	162.6	167.0	176.7	191.9	216.2	253.3	316.0	421.0	576.4	764.2
115°	182.4	186.0	191.4	200.3	215.4	239.4	273.2	327.5	418.3	547.4	701.4
117.5°	205.1	209.2	213.7	221.8	238.7	261.0	294.4	342.9	419.9	530.3	663.4
120°	220.7	223.4	227.8	236.7	253.7	275.9	308.0	354.3	422.8	522.5	643.5
122.5°	234.3	236.9	241.4	251.0	267.2	290.9	322.2	365.0	427.8	517.5	627.1
125°	253.7	255.5	260.8	270.5	287.5	311.6	342.7	381.8	435.2	511.0	606.2
127.5°	268.5	271.1	277.7	287.7	306.4	330.4	360.5	395.7	443.8	507.7	587.6
130°	277.7	280.4	288.4	299.1	317.7	341.8	371.1	405.0	449.5	505.6	577.7
132.5°	284.8	288.2	296.9	309.8	328.4	351.8	380.4	413.6	453.8	504.9	568.4
135°	297.3	300.9	310.7	324.0	342.7	366.7	394.3	424.5	460.2	503.8	556.3
137.5°	309.1	312.8	322.4	336.6	355.2	377.4	403.9	432.7	464.4	501.9	545.8
140°	316.9	321.3	330.2	344.5	362.3	384.5	410.4	437.0	467.3	501.1	539.4
142.5°	325.4	329.1	338.8	351.6	369.3	390.2	415.4	441.3	469.4	499.7	533.7
145°	339.1	341.8	349.8	363.2	378.3	398.8	421.9	445.9	470.8	497.6	526.0
147.5°	353.0	354.6	362.5	374.0	388.6	406.1	427.2	448.8	470.8	494.2	518.5
150°	362.3	363.2	370.2	381.8	394.3	410.4	430.8	449.5	470.8	491.3	513.5
152.5°	371.5	371.7	378.8	389.0	400.0	415.4	432.9	450.9	468.7	487.8	507.9
155°	385.4	385.4	390.7	399.7	409.5	421.9	437.0	451.3	466.4	481.5	499.4
157.5°	396.5	397.2	401.4	409.3	417.6	427.2	439.3	452.2	463.4	476.0	489.7
160°	405.0	405.0	408.6	415.6	421.9	430.8	441.5	452.2	462.0	471.7	483.3
162.5°	411.4	411.4	414.3	419.9	425.4	432.9	442.2	451.5	459.1	467.4	476.9
165°	421.0	420.1	421.9	426.3	429.9	436.1	443.3	449.5	454.9	461.1	468.1
167.5°	428.3	427.2	428.1	431.5	434.0	437.9	443.1	448.1	450.6	454.7	459.9
170°	432.6	430.8	431.7	434.4	436.1	437.9	442.4	445.9	447.7	450.4	454.9
172.5°	435.4	434.4	434.5	436.5	437.6	438.6	442.4	445.2	445.6	446.8	449.9
175°	438.8	437.9	437.0	438.8	438.8	439.7	441.5	443.3	442.4	442.4	444.2
177.5°	440.4	439.7	439.0	439.7	439.7	439.7	440.4	441.8	440.4	439.7	440.4
180°	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7

TEST NUMBER: P331945-940

CATALOG NUMBER: S123DIP-S560D1025U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4
2.5°	791.4	792.6	793.8	794.3	794.2	794.1	794.0	793.9
5°	787.2	788.7	790.2	790.9	790.5	790.2	790.0	789.6
7.5°	778.8	780.2	781.6	782.1	781.9	781.8	781.6	781.4
10°	771.2	772.6	773.9	774.5	774.2	773.8	773.6	773.2
12.5°	762.8	763.8	764.8	765.2	765.0	764.8	764.6	764.5
15°	747.7	748.9	750.1	750.2	749.3	748.4	747.5	746.6
17.5°	728.5	729.3	730.2	730.4	730.1	729.8	729.4	729.1
20°	714.3	715.0	715.5	715.6	715.2	714.7	714.3	713.8
22.5°	699.4	699.8	700.3	700.3	699.7	699.1	698.6	697.9
25°	674.5	674.7	674.8	674.7	674.2	673.8	673.2	672.8
27.5°	648.1	648.2	648.3	648.1	647.5	646.9	646.3	645.8
30°	629.8	629.8	629.8	629.3	628.2	627.1	626.1	625.0
32.5°	610.6	609.8	608.9	608.1	607.6	607.1	606.5	605.9
35°	579.4	578.5	577.7	576.8	576.0	575.3	574.5	573.8
37.5°	547.2	546.2	545.1	544.3	543.9	543.3	542.9	542.3
40°	526.3	525.0	523.9	522.9	522.3	521.7	521.1	520.5
42.5°	504.4	503.2	501.9	501.1	500.4	499.9	499.3	498.6
45°	471.8	469.9	468.1	466.8	466.1	465.3	464.6	463.8
47.5°	437.4	435.6	433.8	432.6	431.9	431.2	430.6	429.9
50°	414.7	413.0	411.3	410.1	409.1	408.2	407.3	406.4
52.5°	391.7	390.3	388.9	387.6	386.7	385.8	385.0	384.1
55°	356.6	355.0	353.3	352.0	351.3	350.5	349.8	349.0
57.5°	322.2	320.7	319.2	318.0	317.1	316.3	315.4	314.5
60°	297.8	296.5	295.1	294.0	293.3	292.5	291.8	291.0
62.5°	274.3	273.0	271.6	270.6	270.1	269.7	269.1	268.6
65°	239.3	238.2	236.9	236.1	235.7	235.2	234.8	234.3
67.5°	204.7	203.7	202.6	201.7	201.1	200.5	199.8	199.2
70°	182.3	181.3	180.2	179.2	178.5	177.7	177.0	176.2
72.5°	159.6	158.6	157.7	157.0	156.7	156.2	155.9	155.4
75°	126.9	126.2	125.4	124.8	124.3	123.9	123.4	123.0
77.5°	96.4	95.9	95.3	95.1	95.1	95.1	95.1	95.1
80°	76.9	76.7	76.6	76.5	76.5	76.5	76.5	76.5
82.5°	59.1	58.9	58.6	58.4	58.3	58.1	58.1	58.0
85°	33.5	33.3	32.9	32.8	32.8	32.8	32.8	32.8
87.5°	16.2	16.3	16.3	16.7	16.5	16.7	16.9	16.7
90°	22.3	23.2	24.1	25.8	24.9	25.8	26.7	25.8
92.5°	74.9	59.5	52.5	47.9	46.3	43.6	44.5	42.9
95°	320.4	217.2	170.0	137.9	121.1	113.1	106.8	103.3
97.5°	798.8	639.8	525.0	418.5	352.8	312.8	288.7	281.1
100°	1049.5	977.3	873.2	746.8	656.9	591.9	557.2	558.1
102.5°	1132.7	1130.4	1069.7	989.6	919.6	868.2	839.2	818.7
105°	1157.1	1246.2	1263.0	1239.9	1198.9	1165.1	1136.7	1132.2
107.5°	1087.0	1231.5	1309.5	1341.2	1341.9	1330.5	1320.9	1312.7
110°	1020.0	1183.8	1295.9	1358.3	1383.2	1390.4	1388.6	1386.8

TEST NUMBER: P331945-940

CATALOG NUMBER: S123DIP-S560D1025U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	953.8	1121.1	1246.8	1327.0	1372.5	1394.5	1401.3	1401.7
115°	866.0	1020.9	1151.7	1248.8	1315.5	1354.7	1372.5	1377.0
117.5°	802.5	936.2	1053.6	1152.1	1221.7	1266.6	1292.3	1298.2
120°	769.0	889.2	996.0	1085.9	1156.2	1206.0	1227.4	1232.8
122.5°	742.7	851.5	950.5	1033.9	1096.4	1141.3	1164.8	1171.5
125°	707.7	804.7	890.1	961.3	1018.2	1057.4	1079.7	1085.9
127.5°	677.0	763.5	840.6	905.4	956.1	989.6	1009.7	1015.4
130°	657.8	737.9	809.9	870.5	917.7	949.8	968.4	975.5
132.5°	640.0	713.6	780.8	838.5	882.8	914.8	931.4	936.4
135°	615.9	679.1	737.0	787.7	831.3	858.0	874.1	880.3
137.5°	594.1	645.9	695.7	739.7	776.3	803.4	816.9	821.0
140°	581.2	626.6	669.3	707.7	741.5	766.3	780.6	779.7
142.5°	569.1	608.1	645.2	678.4	707.3	729.3	742.2	741.3
145°	554.6	583.9	612.3	638.2	660.4	679.1	686.3	688.0
147.5°	542.6	565.9	588.9	607.3	624.1	636.8	643.5	644.3
150°	534.0	554.6	573.2	590.1	603.5	613.2	618.6	618.6
152.5°	526.2	543.9	560.4	574.4	585.0	594.1	597.3	597.3
155°	514.4	528.7	542.1	552.8	560.8	567.8	569.6	570.5
157.5°	502.0	513.9	524.2	532.6	539.6	544.9	546.4	546.2
160°	494.9	504.7	513.5	519.8	526.0	531.4	531.4	530.5
162.5°	486.3	494.7	502.9	508.5	512.6	517.1	517.1	516.2
165°	475.3	480.6	486.9	491.3	494.9	498.5	497.6	497.6
167.5°	465.7	469.8	473.3	476.5	478.1	480.6	479.7	479.7
170°	459.3	462.0	465.5	467.3	468.1	469.9	469.0	469.0
172.5°	453.6	455.6	458.4	459.5	459.7	461.5	459.9	459.1
175°	445.9	446.8	448.6	448.6	448.6	449.5	448.6	447.7
177.5°	441.1	441.8	442.6	442.6	441.8	442.6	441.1	441.1
180°	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7

(END OF REPORT)