

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331991-940

Luminaire Tested: **S123DIP-S775D1195U940-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331991-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D1195U940-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1195 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7164.4 lumens
Efficiency: N/A
Efficacy: 125.9 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

Luminous Intensity Polar Plot

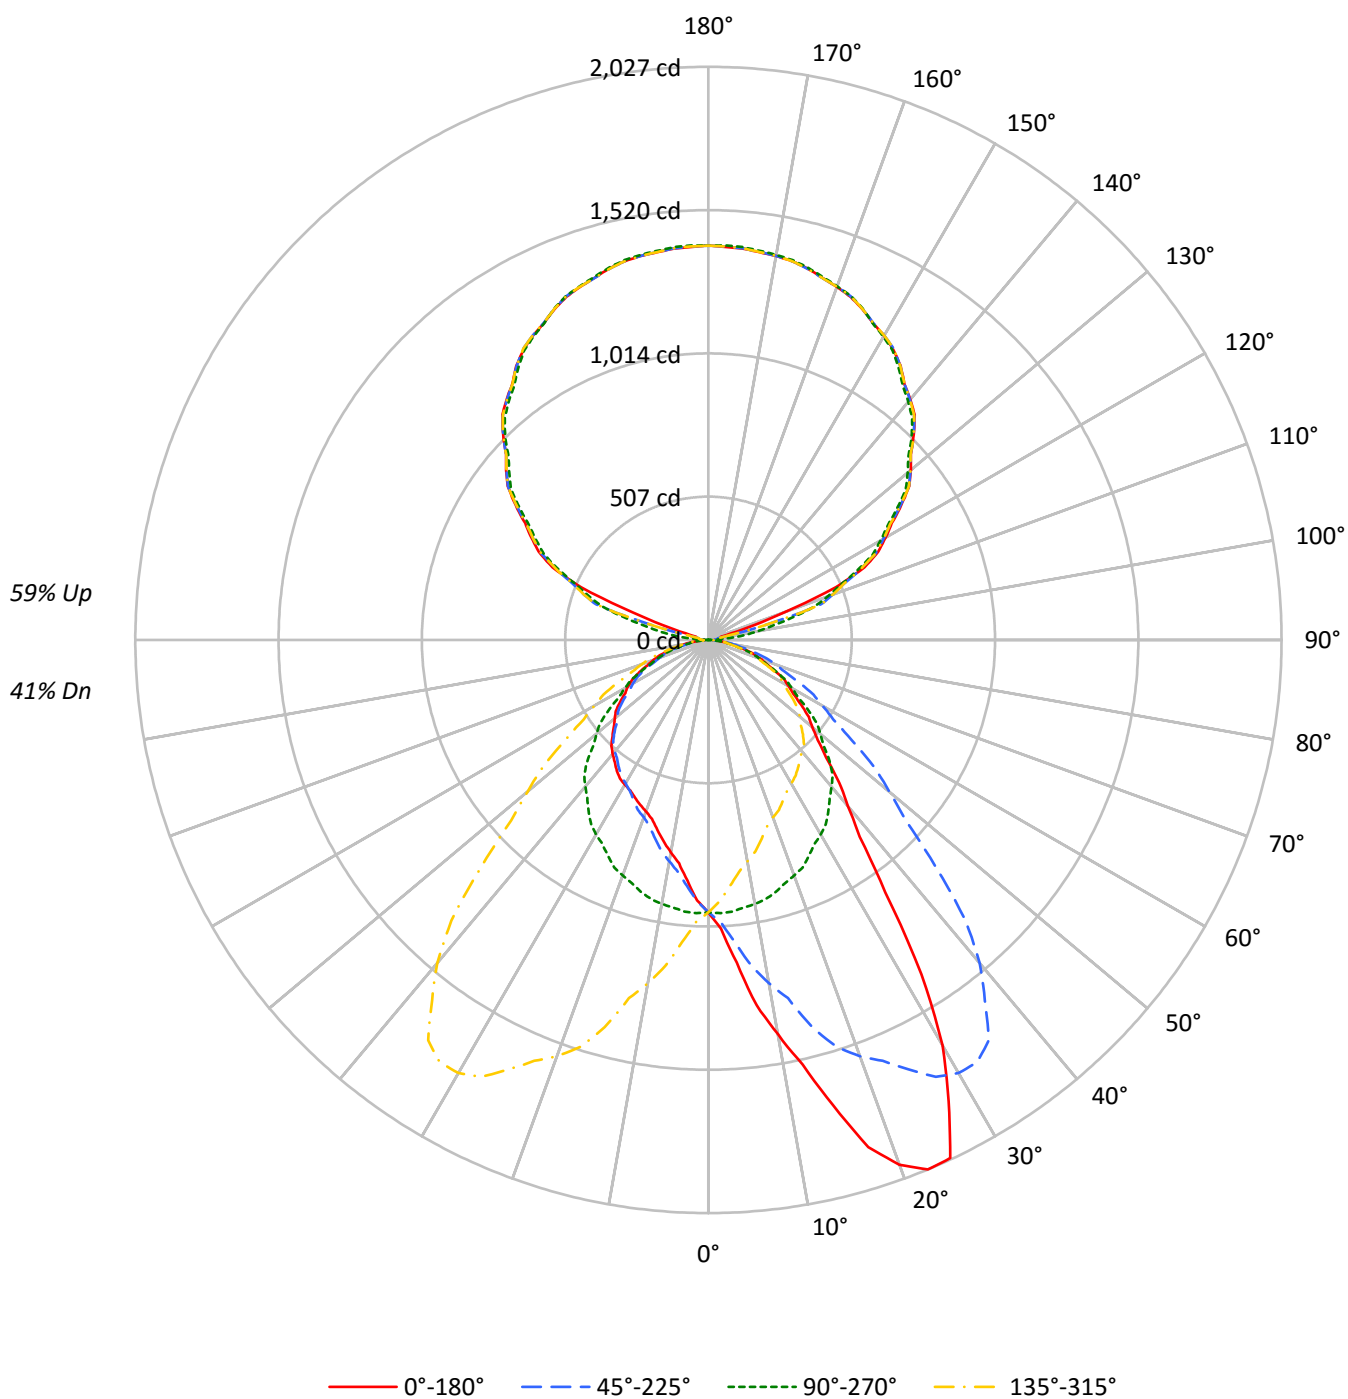

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48
1	96	92	88	85	87	84	81	78	69	67	65	55	54	52	42	41	41
2	87	80	74	69	79	73	68	64	60	57	54	49	46	44	37	36	34
3	80	71	64	58	73	65	59	54	53	49	45	43	40	37	33	31	30
4	73	63	55	49	66	57	51	46	48	43	39	38	35	32	30	28	26
5	67	56	48	42	61	51	44	39	43	37	33	35	31	28	27	24	22
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20
7	57	45	37	32	52	42	35	30	35	29	26	28	24	22	22	20	18
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14
10	46	34	27	22	42	32	25	21	27	22	18	22	18	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10371	10371	10371	10371
5°	12369	10416	9231	10416
10°	15481	10364	8337	10364
15°	18988	10280	7762	10280
20°	22620	10149	7391	10149
25°	24018	9991	7308	9991
30°	20586	9875	7346	9875
35°	14318	9711	7423	9711
40°	10784	9517	7399	9517
45°	8954	9232	7305	9232
50°	8020	8646	7239	8646
55°	7499	8015	7148	8015
60°	7035	7356	7076	7356
65°	6612	6706	6849	6706
70°	6200	5964	6521	5964
75°	5552	5224	5976	5224
80°	4866	4283	5151	4283
85°	3816	3112	3458	3112

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.9	1.3
10°-20°	304.3	4.2
20°-30°	510.8	7.1
30°-40°	578.4	8.1
40°-50°	518.7	7.2
50°-60°	418.6	5.8
60°-70°	291.7	4.1
70°-80°	153.3	2.1
80°-90°	41.4	0.6
90°-100°	50.7	0.7
100°-110°	241.6	3.4
110°-120°	580.4	8.1
120°-130°	739.1	10.3
130°-140°	789.7	11.0
140°-150°	738.4	10.3
150°-160°	595.6	8.3
160°-170°	384.4	5.4
170°-180°	132.5	1.8
0°-30°	910.1	12.7
0°-40°	1488.4	20.8
0°-60°	2425.7	33.9
0°-90°	2912.0	40.6
90°-120°	872.7	12.2
90°-150°	3139.9	43.8
90°-180°	4252.0	59.3
0°-180°	7164.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	964	964	964	964	964	
5°	1145	964	854	964	1145	119
15°	1704	922	696	922	1704	492
25°	2022	841	615	841	2022	887
35°	1090	739	565	739	1090	708
45°	588	606	480	606	588	465
55°	400	427	381	427	400	359
65°	260	263	269	263	260	259
75°	134	126	144	126	134	143
85°	31	25	28	25	31	37
90°	31	1	31	1	31	16
95°	39	63	39	63	39	33
105°	46	309	46	309	46	104
115°	609	579	609	579	609	563
125°	833	816	833	816	833	744
135°	1027	1016	1027	1016	1027	792
145°	1184	1173	1184	1173	1184	739
155°	1290	1292	1290	1292	1290	595
165°	1359	1362	1359	1362	1359	384
175°	1389	1394	1389	1394	1389	132
180°	1394	1394	1394	1394	1394	

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	1022.5	1021.8	1019.9	1021.5	1018.4	1014.3	1014.0	1010.2	999.3	998.6	995.7
5°	1144.7	1140.9	1140.5	1140.0	1133.5	1124.6	1107.8	1106.3	1084.0	1072.7	1059.3
7.5°	1302.8	1304.8	1298.0	1292.0	1272.0	1258.8	1240.8	1217.7	1190.3	1162.3	1143.7
10°	1416.4	1431.7	1412.6	1399.5	1387.4	1364.5	1337.9	1304.8	1271.7	1232.9	1203.5
12.5°	1538.1	1545.7	1541.9	1529.6	1510.6	1475.9	1428.7	1392.1	1361.6	1297.1	1271.0
15°	1703.9	1732.4	1714.2	1672.1	1673.1	1639.9	1578.3	1510.6	1474.7	1418.2	1341.2
17.5°	1880.5	1884.1	1876.3	1841.4	1818.0	1772.5	1715.6	1650.7	1577.9	1509.5	1427.8
20°	1974.7	1971.8	1955.5	1937.3	1897.2	1861.7	1799.7	1727.2	1633.9	1566.6	1477.5
22.5°	2026.9	2022.3	2014.6	1999.3	1965.9	1927.8	1872.1	1793.0	1704.1	1611.5	1508.5
25°	2022.3	2028.4	2029.3	2025.1	2013.4	1990.6	1946.7	1883.6	1794.9	1675.9	1568.5
27.5°	1839.3	1847.9	1872.9	1895.0	1919.7	1944.9	1941.5	1910.2	1844.6	1741.9	1610.5
30°	1656.3	1637.6	1683.8	1742.2	1781.9	1851.9	1891.1	1893.5	1856.5	1768.4	1640.4
32.5°	1402.3	1422.9	1443.3	1515.1	1601.9	1680.5	1758.5	1821.4	1828.5	1769.9	1658.0
35°	1089.6	1115.3	1152.6	1189.9	1283.4	1363.6	1500.8	1620.3	1715.6	1728.2	1659.6
37.5°	878.0	890.7	914.4	951.7	1012.8	1108.0	1214.2	1365.3	1503.2	1605.9	1610.3
40°	767.5	771.2	797.8	826.3	875.7	954.2	1049.9	1183.4	1348.6	1492.0	1551.8
42.5°	684.6	692.8	704.1	731.4	770.8	829.8	918.8	1029.1	1180.6	1345.6	1462.5
45°	588.2	597.5	604.6	622.8	650.8	690.5	752.5	853.4	968.7	1139.1	1296.4
47.5°	524.5	525.3	530.5	544.2	563.3	593.1	636.9	701.8	807.6	945.7	1107.3
50°	478.9	486.4	488.3	499.0	514.0	535.9	572.3	627.4	714.3	835.6	984.1
52.5°	446.8	449.1	454.3	462.1	475.1	492.2	523.8	566.9	635.1	738.5	875.0
55°	399.6	399.6	404.7	410.8	418.3	433.6	454.7	486.4	538.2	618.6	731.6
57.5°	355.9	358.2	361.9	363.7	370.1	380.3	397.8	422.0	460.6	522.4	612.2
60°	326.8	331.0	330.6	334.2	339.8	347.8	362.7	382.4	416.9	466.4	542.0
62.5°	301.4	301.1	301.0	305.5	311.1	318.7	328.3	345.4	374.7	418.6	483.0
65°	259.6	258.6	261.9	264.7	266.5	272.2	279.6	294.5	314.1	346.9	396.8
67.5°	222.4	219.7	221.5	222.4	225.6	230.0	236.9	246.2	261.8	288.0	325.7
70°	197.0	194.7	194.2	195.1	198.0	201.2	206.3	215.2	229.7	250.7	278.2
72.5°	170.9	169.2	169.2	171.2	172.5	174.7	178.3	186.5	198.0	213.7	239.4
75°	133.5	133.5	133.5	133.9	135.4	137.2	140.1	144.3	153.1	164.3	181.6
77.5°	100.0	100.0	99.4	99.3	101.4	102.3	102.9	106.8	111.7	119.3	131.9
80°	78.5	76.1	77.0	78.5	79.4	79.8	81.2	82.1	86.4	90.6	99.4
82.5°	58.2	56.3	56.4	58.7	58.9	59.3	60.7	62.0	63.6	67.4	72.1
85°	30.9	30.9	31.3	31.3	31.7	31.3	32.6	33.2	33.2	35.5	38.3
87.5°	17.4	16.6	16.9	17.1	16.7	16.9	17.1	17.3	17.5	17.7	17.5
90°	31.1	30.6	30.1	29.7	29.2	28.5	27.6	26.7	25.8	24.9	21.8
92.5°	34.4	34.2	33.9	33.5	33.3	32.5	30.9	29.4	28.0	26.5	24.3
95°	39.3	39.3	39.3	39.3	39.3	38.5	36.9	35.3	33.7	32.1	29.6
97.5°	42.7	42.4	42.3	42.0	41.7	40.8	38.9	37.0	35.2	33.3	49.9
100°	43.5	43.2	43.1	42.8	42.6	41.6	39.7	37.9	36.0	34.2	70.1
102.5°	44.3	44.0	43.5	43.1	42.7	45.3	51.0	56.7	62.4	68.1	107.4
105°	45.6	45.1	44.7	44.2	43.8	63.8	104.6	145.3	186.1	226.9	247.6
107.5°	143.2	173.9	204.6	235.3	266.0	296.3	326.2	356.1	385.9	415.9	412.6
110°	284.9	317.8	350.7	383.7	416.6	436.8	444.4	452.0	459.7	467.3	464.7

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	488.7	495.7	502.7	509.6	516.6	520.0	519.9	519.7	519.6	519.4	516.9
115°	609.1	608.2	607.3	606.4	605.5	603.9	601.5	599.2	597.0	594.7	592.6
117.5°	676.7	676.5	676.4	676.2	676.0	674.9	673.2	671.3	669.4	667.6	666.6
120°	723.1	723.1	723.1	723.1	723.1	722.2	720.3	718.5	716.7	714.8	714.2
122.5°	768.7	768.6	768.3	768.1	767.9	767.2	766.0	764.6	763.4	762.1	761.2
125°	832.9	832.5	832.1	831.5	831.1	830.6	830.2	829.7	829.3	828.8	827.9
127.5°	894.7	895.2	895.6	896.1	896.5	896.3	895.6	894.9	894.2	893.4	892.3
130°	934.5	935.0	935.4	935.9	936.3	936.1	935.1	934.2	933.4	932.4	931.5
132.5°	970.9	971.6	972.2	972.9	973.5	973.4	972.5	971.5	970.6	969.7	968.9
135°	1026.7	1027.3	1028.1	1028.8	1029.5	1029.5	1028.8	1028.1	1027.3	1026.7	1025.7
137.5°	1079.1	1079.6	1080.0	1080.5	1080.9	1080.6	1079.5	1078.4	1077.3	1076.2	1075.7
140°	1110.6	1111.1	1111.5	1112.0	1112.4	1112.2	1111.3	1110.4	1109.5	1108.5	1107.9
142.5°	1139.6	1140.2	1140.9	1141.6	1142.2	1142.1	1141.4	1140.7	1140.0	1139.2	1138.5
145°	1184.1	1184.1	1184.1	1184.1	1184.1	1183.9	1183.5	1183.0	1182.5	1182.1	1181.6
147.5°	1217.3	1218.3	1219.4	1220.5	1221.6	1221.8	1221.4	1220.9	1220.5	1219.9	1219.5
150°	1242.2	1242.9	1243.6	1244.2	1244.9	1245.0	1244.6	1244.1	1243.7	1243.2	1242.8
152.5°	1262.0	1263.1	1264.2	1265.2	1266.3	1266.4	1265.6	1264.7	1263.9	1263.1	1262.8
155°	1289.9	1291.2	1292.6	1294.0	1295.3	1295.5	1294.3	1293.2	1292.0	1290.8	1290.7
157.5°	1313.2	1315.0	1316.8	1318.7	1320.4	1320.6	1319.2	1317.9	1316.5	1315.1	1315.4
160°	1328.1	1329.7	1331.4	1333.0	1334.6	1334.7	1333.3	1331.9	1330.6	1329.2	1329.5
162.5°	1342.2	1343.6	1345.1	1346.5	1347.9	1347.9	1346.3	1344.8	1343.2	1341.6	1341.8
165°	1359.2	1360.8	1362.4	1364.1	1365.7	1365.6	1363.7	1361.9	1360.0	1358.2	1358.4
167.5°	1371.5	1373.3	1375.1	1377.0	1378.9	1378.9	1377.0	1375.1	1373.3	1371.5	1371.5
170°	1378.9	1380.7	1382.6	1384.5	1386.3	1386.3	1384.5	1382.6	1380.7	1378.9	1378.9
172.5°	1383.0	1385.1	1387.1	1389.1	1391.2	1391.2	1389.4	1387.6	1385.7	1383.8	1383.7
175°	1389.3	1391.2	1392.9	1394.8	1396.6	1396.8	1395.2	1393.6	1392.0	1390.3	1390.1
177.5°	1391.2	1392.9	1394.8	1396.7	1398.5	1398.6	1397.2	1395.7	1394.3	1392.8	1392.6
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	993.4	990.4	987.4	982.2	977.8	971.3	969.5	967.2	960.6	954.6	950.1
5°	1054.1	1042.9	1026.5	1011.6	999.5	983.1	973.8	964.0	950.0	937.4	927.1
7.5°	1117.6	1095.6	1070.1	1042.7	1017.1	992.5	972.6	954.8	935.2	916.7	902.2
10°	1168.0	1136.2	1100.8	1062.5	1029.8	998.1	971.4	948.2	922.9	901.0	882.8
12.5°	1225.5	1178.5	1129.5	1083.1	1044.4	1000.3	968.1	938.4	909.8	883.4	863.0
15°	1293.6	1233.9	1175.9	1112.0	1053.2	998.1	959.8	922.5	889.3	862.2	836.1
17.5°	1355.6	1287.9	1211.6	1133.8	1062.8	997.6	944.0	901.7	860.2	827.2	801.1
20°	1390.7	1313.7	1227.3	1146.6	1068.1	995.2	936.5	886.0	841.2	806.2	776.8
22.5°	1420.9	1330.8	1241.4	1155.1	1067.7	989.3	922.7	870.8	822.2	787.9	756.6
25°	1452.3	1344.4	1254.8	1153.5	1056.0	974.7	900.0	841.2	792.6	752.5	720.3
27.5°	1479.2	1343.5	1237.2	1128.2	1037.5	956.1	876.3	813.2	761.7	718.1	685.4
30°	1497.1	1345.4	1218.9	1111.1	1019.6	935.5	858.0	794.5	740.4	696.1	665.2
32.5°	1508.3	1344.3	1202.1	1087.2	991.1	916.9	838.2	772.5	716.8	673.2	643.5
35°	1514.8	1336.1	1173.1	1037.8	945.3	873.0	807.2	739.0	680.6	640.0	606.5
37.5°	1501.8	1318.8	1139.5	990.2	888.9	817.7	762.3	704.3	648.5	603.7	574.8
40°	1481.2	1307.6	1113.4	956.5	850.1	781.5	734.3	677.3	622.2	579.8	552.7
42.5°	1442.0	1284.8	1084.6	919.2	809.8	741.1	697.8	650.1	598.0	558.1	531.1
45°	1346.3	1235.2	1041.5	863.2	750.2	679.2	641.0	606.5	559.3	520.5	497.1
47.5°	1213.5	1160.7	979.1	804.1	688.0	619.7	580.0	552.1	517.7	486.4	464.0
50°	1121.3	1099.4	936.9	763.8	646.6	579.8	541.5	516.3	491.6	460.3	439.8
52.5°	1014.9	1028.4	887.6	721.9	604.3	538.7	502.7	482.7	460.2	434.5	416.6
55°	865.0	914.0	802.5	651.7	541.5	478.9	444.9	427.1	414.1	394.9	379.5
57.5°	724.7	787.1	710.4	579.3	479.8	425.9	393.2	373.8	365.4	355.4	343.3
60°	641.4	703.0	644.7	530.7	438.4	387.0	358.0	341.7	333.3	326.3	316.0
62.5°	567.1	629.5	580.4	481.5	397.6	350.0	324.9	308.9	302.3	298.6	289.9
65°	464.9	518.6	486.0	404.7	339.4	297.4	274.5	263.3	257.3	255.8	250.2
67.5°	378.4	419.3	395.5	335.7	284.3	248.0	228.5	219.0	214.4	213.9	209.7
70°	321.6	359.9	341.7	287.6	243.3	214.7	198.0	189.5	186.7	186.3	184.0
72.5°	277.6	304.3	289.8	244.6	210.4	184.5	172.2	163.4	160.2	160.9	159.3
75°	205.4	225.5	217.0	185.8	158.3	141.4	131.2	125.6	122.8	124.2	122.3
77.5°	147.8	160.5	152.9	131.3	114.3	102.1	94.6	91.1	88.6	88.5	87.7
80°	111.6	119.0	114.9	101.7	87.7	77.5	71.4	69.1	67.7	67.2	66.8
82.5°	79.5	85.8	80.9	71.9	62.3	56.2	52.8	49.7	48.7	49.0	48.4
85°	40.1	42.4	40.6	35.0	31.3	28.4	26.6	25.2	24.3	24.7	23.8
87.5°	17.6	17.4	15.7	13.6	12.4	10.9	10.3	9.2	8.9	9.4	9.5
90°	18.9	15.9	12.9	10.3	7.9	5.6	3.3	1.1	3.3	5.6	7.9
92.5°	22.0	19.8	17.5	16.7	17.3	18.0	18.6	19.3	18.6	18.0	17.3
95°	27.0	24.5	22.0	25.4	34.9	44.3	53.8	63.2	53.8	44.3	34.9
97.5°	66.5	83.1	99.7	110.0	114.3	118.5	122.8	127.0	122.8	118.5	114.3
100°	106.0	142.0	177.8	193.5	188.9	184.3	179.7	175.0	179.7	184.3	188.9
102.5°	146.6	185.8	225.1	243.1	239.7	236.4	233.1	229.8	233.1	236.4	239.7
105°	268.3	289.0	309.8	318.9	316.3	313.8	311.3	308.7	311.3	313.8	316.3
107.5°	409.3	406.1	402.8	400.1	398.1	396.1	394.0	392.0	394.0	396.1	398.1
110°	462.2	459.7	457.1	455.0	453.1	451.2	449.4	447.5	449.4	451.2	453.1

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	514.4	511.8	509.3	507.2	505.6	503.9	502.2	500.6	502.2	503.9	505.6
115°	590.5	588.4	586.4	584.6	583.3	581.8	580.5	579.2	580.5	581.8	583.3
117.5°	665.5	664.4	663.3	662.0	660.3	658.5	656.8	655.1	656.8	658.5	660.3
120°	713.5	712.7	712.1	710.7	708.6	706.6	704.5	702.4	704.5	706.6	708.6
122.5°	760.4	759.5	758.6	757.3	755.5	753.9	752.2	750.5	752.2	753.9	755.5
125°	827.0	826.0	825.1	823.8	821.9	820.0	818.2	816.4	818.2	820.0	821.9
127.5°	891.3	890.1	889.0	887.5	885.7	883.9	882.0	880.2	882.0	883.9	885.7
130°	930.6	929.6	928.7	927.3	925.5	923.6	921.9	920.0	921.9	923.6	925.5
132.5°	968.2	967.5	966.7	965.5	963.6	961.8	959.9	958.1	959.9	961.8	963.6
135°	1024.8	1024.0	1023.0	1021.8	1020.5	1019.0	1017.7	1016.3	1017.7	1019.0	1020.5
137.5°	1075.2	1074.7	1074.2	1073.1	1071.3	1069.5	1067.8	1066.0	1067.8	1069.5	1071.3
140°	1107.1	1106.4	1105.7	1104.7	1103.3	1102.0	1100.5	1099.2	1100.5	1102.0	1103.3
142.5°	1137.8	1137.1	1136.4	1135.4	1134.0	1132.7	1131.2	1129.9	1131.2	1132.7	1134.0
145°	1181.2	1180.7	1180.3	1179.2	1177.6	1176.0	1174.4	1172.8	1174.4	1176.0	1177.6
147.5°	1219.1	1218.6	1218.2	1217.4	1216.3	1215.3	1214.2	1213.2	1214.2	1215.3	1216.3
150°	1242.2	1241.8	1241.4	1240.8	1240.1	1239.4	1238.7	1238.1	1238.7	1239.4	1240.1
152.5°	1262.6	1262.2	1261.9	1261.7	1261.3	1261.1	1260.7	1260.4	1260.7	1261.1	1261.3
155°	1290.4	1290.1	1289.9	1290.0	1290.5	1290.9	1291.5	1291.9	1291.5	1290.9	1290.5
157.5°	1315.5	1315.8	1316.0	1316.2	1316.2	1316.3	1316.3	1316.3	1316.3	1316.3	1316.2
160°	1329.6	1329.9	1330.1	1330.3	1330.6	1330.8	1331.1	1331.2	1331.1	1330.8	1330.6
162.5°	1342.1	1342.3	1342.6	1342.9	1343.5	1344.2	1344.8	1345.3	1344.8	1344.2	1343.5
165°	1358.6	1358.9	1359.1	1359.6	1360.3	1360.9	1361.6	1362.4	1361.6	1360.9	1360.3
167.5°	1371.5	1371.5	1371.5	1371.9	1372.9	1373.8	1374.7	1375.6	1374.7	1373.8	1372.9
170°	1378.9	1378.9	1378.9	1379.4	1380.3	1381.3	1382.2	1383.0	1382.2	1381.3	1380.3
172.5°	1383.5	1383.3	1383.1	1383.6	1384.7	1385.8	1387.0	1388.0	1387.0	1385.8	1384.7
175°	1389.8	1389.6	1389.4	1389.8	1391.0	1392.1	1393.3	1394.5	1393.3	1392.1	1391.0
177.5°	1392.4	1392.2	1392.0	1392.4	1393.4	1394.3	1395.2	1396.2	1395.2	1394.3	1393.4
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	947.4	944.9	941.1	935.5	931.0	923.9	923.9	925.1	925.1	924.7	923.9
5°	918.7	911.7	903.3	893.5	883.2	873.0	871.1	867.4	864.6	862.7	860.3
7.5°	888.4	875.9	863.7	850.0	837.5	827.2	819.9	814.0	810.1	806.0	803.1
10°	867.8	852.4	837.9	823.5	807.6	795.0	787.1	781.5	777.3	773.6	771.7
12.5°	843.6	825.9	809.9	796.2	778.8	765.9	758.3	755.7	750.7	742.9	738.8
15°	808.1	791.8	772.6	751.6	743.2	727.3	718.5	714.3	711.4	705.3	703.5
17.5°	777.8	756.3	734.9	719.2	703.6	690.7	685.7	680.6	676.8	671.8	670.4
20°	753.5	734.3	714.7	697.9	681.5	667.5	663.3	659.6	655.9	653.5	651.7
22.5°	728.8	709.7	693.4	677.7	660.3	651.1	646.6	642.5	639.8	638.3	636.4
25°	694.2	677.3	659.2	645.2	631.2	625.1	622.2	619.9	618.0	615.7	615.3
27.5°	663.2	644.9	630.1	617.1	607.0	601.9	599.2	598.1	598.5	599.3	599.9
30°	640.0	623.2	611.1	599.9	590.6	585.9	585.4	585.4	587.3	587.7	588.7
32.5°	618.8	604.9	592.8	581.9	574.9	571.7	573.5	573.5	575.0	576.1	577.8
35°	587.7	575.6	566.2	557.0	550.9	552.2	553.2	554.1	556.4	559.3	561.2
37.5°	558.1	547.6	537.9	530.6	527.8	530.3	532.5	534.5	537.3	539.4	541.3
40°	536.8	528.9	519.6	513.0	514.0	515.4	517.3	519.6	521.9	523.3	525.2
42.5°	517.0	508.7	501.7	496.2	497.6	499.4	500.4	501.7	504.4	506.8	508.0
45°	486.9	480.4	473.9	470.6	471.5	472.4	473.3	474.7	477.1	478.9	479.5
47.5°	453.0	448.4	444.1	440.9	442.4	442.0	443.2	446.2	446.9	448.1	450.7
50°	431.3	427.1	422.0	421.1	421.1	421.1	421.5	425.3	425.3	427.1	429.0
52.5°	407.4	404.7	401.4	399.8	399.0	399.0	401.0	402.9	403.6	406.3	408.1
55°	372.0	369.3	366.5	365.1	364.1	365.1	368.8	369.7	372.0	373.4	374.9
57.5°	335.2	333.1	330.8	330.0	329.8	331.1	333.1	335.9	336.5	340.8	343.0
60°	310.9	307.6	305.8	305.8	304.9	309.1	308.1	312.8	313.7	316.5	319.8
62.5°	285.9	281.5	280.7	280.7	282.0	283.3	284.5	286.6	289.1	292.6	295.2
65°	245.6	243.3	246.5	246.0	245.0	247.9	247.9	250.2	253.0	256.3	261.4
67.5°	207.3	206.2	206.4	206.4	207.9	209.5	210.7	212.8	216.2	219.6	222.9
70°	181.6	183.0	180.7	182.5	184.0	184.4	185.3	188.2	191.9	194.2	198.0
72.5°	156.6	156.5	156.8	157.5	158.9	159.7	160.7	163.9	168.0	170.0	172.9
75°	120.5	119.9	121.4	121.4	123.7	124.7	125.6	127.0	130.7	133.5	135.8
77.5°	87.9	88.5	88.2	89.8	89.2	89.3	92.2	93.6	94.0	99.5	100.8
80°	66.3	67.2	67.7	68.1	68.7	67.7	71.0	72.3	72.3	75.6	77.9
82.5°	47.6	48.2	49.4	49.8	49.9	50.9	51.2	52.2	53.3	54.8	57.8
85°	23.8	25.2	25.7	25.2	25.7	24.7	26.1	26.6	27.1	27.1	27.1
87.5°	9.5	10.4	10.6	11.6	11.9	12.8	13.0	12.4	12.7	13.9	12.6
90°	10.3	12.9	15.9	18.9	21.8	24.9	25.8	26.7	27.6	28.5	29.2
92.5°	16.7	17.5	19.8	22.0	24.3	26.5	28.0	29.4	30.9	32.5	33.3
95°	25.4	22.0	24.5	27.0	29.6	32.1	33.7	35.3	36.9	38.5	39.3
97.5°	110.0	99.7	83.1	66.5	49.9	33.3	35.2	37.0	38.9	40.8	41.7
100°	193.5	177.8	142.0	106.0	70.1	34.2	36.0	37.9	39.7	41.6	42.6
102.5°	243.1	225.1	185.8	146.6	107.4	68.1	62.4	56.7	51.0	45.3	42.7
105°	318.9	309.8	289.0	268.3	247.6	226.9	186.1	145.3	104.6	63.8	43.8
107.5°	400.1	402.8	406.1	409.3	412.6	415.9	385.9	356.1	326.2	296.3	266.0
110°	455.0	457.1	459.7	462.2	464.7	467.3	459.7	452.0	444.4	436.8	416.6

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	507.2	509.3	511.8	514.4	516.9	519.4	519.6	519.7	519.9	520.0	516.6
115°	584.6	586.4	588.4	590.5	592.6	594.7	597.0	599.2	601.5	603.9	605.5
117.5°	662.0	663.3	664.4	665.5	666.6	667.6	669.4	671.3	673.2	674.9	676.0
120°	710.7	712.1	712.7	713.5	714.2	714.8	716.7	718.5	720.3	722.2	723.1
122.5°	757.3	758.6	759.5	760.4	761.2	762.1	763.4	764.6	766.0	767.2	767.9
125°	823.8	825.1	826.0	827.0	827.9	828.8	829.3	829.7	830.2	830.6	831.1
127.5°	887.5	889.0	890.1	891.3	892.3	893.4	894.2	894.9	895.6	896.3	896.5
130°	927.3	928.7	929.6	930.6	931.5	932.4	933.4	934.2	935.1	936.1	936.3
132.5°	965.5	966.7	967.5	968.2	968.9	969.7	970.6	971.5	972.5	973.4	973.5
135°	1021.8	1023.0	1024.0	1024.8	1025.7	1026.7	1027.3	1028.1	1028.8	1029.5	1029.5
137.5°	1073.1	1074.2	1074.7	1075.2	1075.7	1076.2	1077.3	1078.4	1079.5	1080.6	1080.9
140°	1104.7	1105.7	1106.4	1107.1	1107.9	1108.5	1109.5	1110.4	1111.3	1112.2	1112.4
142.5°	1135.4	1136.4	1137.1	1137.8	1138.5	1139.2	1140.0	1140.7	1141.4	1142.1	1142.2
145°	1179.2	1180.3	1180.7	1181.2	1181.6	1182.1	1182.5	1183.0	1183.5	1183.9	1184.1
147.5°	1217.4	1218.2	1218.6	1219.1	1219.5	1219.9	1220.5	1220.9	1221.4	1221.8	1221.6
150°	1240.8	1241.4	1241.8	1242.2	1242.8	1243.2	1243.7	1244.1	1244.6	1245.0	1244.9
152.5°	1261.7	1261.9	1262.2	1262.6	1262.8	1263.1	1263.9	1264.7	1265.6	1266.4	1266.3
155°	1290.0	1289.9	1290.1	1290.4	1290.7	1290.8	1292.0	1293.2	1294.3	1295.5	1295.3
157.5°	1316.2	1316.0	1315.8	1315.5	1315.4	1315.1	1316.5	1317.9	1319.2	1320.6	1320.4
160°	1330.3	1330.1	1329.9	1329.6	1329.5	1329.2	1330.6	1331.9	1333.3	1334.7	1334.6
162.5°	1342.9	1342.6	1342.3	1342.1	1341.8	1341.6	1343.2	1344.8	1346.3	1347.9	1347.9
165°	1359.6	1359.1	1358.9	1358.6	1358.4	1358.2	1360.0	1361.9	1363.7	1365.6	1365.7
167.5°	1371.9	1371.5	1371.5	1371.5	1371.5	1371.5	1373.3	1375.1	1377.0	1378.9	1378.9
170°	1379.4	1378.9	1378.9	1378.9	1378.9	1378.9	1380.7	1382.6	1384.5	1386.3	1386.3
172.5°	1383.6	1383.1	1383.3	1383.5	1383.7	1383.8	1385.7	1387.6	1389.4	1391.2	1391.2
175°	1389.8	1389.4	1389.6	1389.8	1390.1	1390.3	1392.0	1393.6	1395.2	1396.8	1396.6
177.5°	1392.4	1392.0	1392.2	1392.4	1392.6	1392.8	1394.3	1395.7	1397.2	1398.6	1398.5
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	921.3	921.0	923.5	921.7	923.5	921.0	921.3	923.9	924.7	925.1	925.1
5°	857.6	859.0	854.3	854.3	854.3	859.0	857.6	860.3	862.7	864.6	867.4
7.5°	800.8	798.7	798.9	796.4	798.9	798.7	800.8	803.1	806.0	810.1	814.0
10°	766.1	763.3	762.3	762.8	762.3	763.3	766.1	771.7	773.6	777.3	781.5
12.5°	737.3	736.7	730.6	730.7	730.6	736.7	737.3	738.8	742.9	750.7	755.7
15°	703.5	694.6	693.7	696.5	693.7	694.6	703.5	703.5	705.3	711.4	714.3
17.5°	669.6	664.9	665.2	663.8	665.2	664.9	669.6	670.4	671.8	676.8	680.6
20°	651.7	648.9	648.5	645.2	648.5	648.9	651.7	651.7	653.5	655.9	659.6
22.5°	635.3	634.4	634.6	631.0	634.6	634.4	635.3	636.4	638.3	639.8	642.5
25°	614.8	617.2	615.3	615.3	615.3	617.2	614.8	615.3	615.7	618.0	619.9
27.5°	601.0	600.9	599.9	599.9	599.9	600.9	601.0	599.9	599.3	598.5	598.1
30°	590.6	590.0	591.0	591.0	591.0	590.0	590.6	588.7	587.7	587.3	585.4
32.5°	580.1	580.8	580.9	581.3	580.9	580.8	580.1	577.8	576.1	575.0	573.5
35°	563.9	564.4	565.8	564.9	565.8	564.4	563.9	561.2	559.3	556.4	554.1
37.5°	542.1	544.2	543.8	544.5	543.8	544.2	542.1	541.3	539.4	537.3	534.5
40°	525.7	527.1	526.6	526.6	526.6	527.1	525.7	525.2	523.3	521.9	519.6
42.5°	508.8	509.9	508.6	507.9	508.6	509.9	508.8	508.0	506.8	504.4	501.7
45°	481.3	480.4	481.8	479.9	481.8	480.4	481.3	479.5	478.9	477.1	474.7
47.5°	450.5	451.4	451.8	453.2	451.8	451.4	450.5	450.7	448.1	446.9	446.2
50°	430.0	432.7	432.7	432.3	432.7	432.7	430.0	429.0	427.1	425.3	425.3
52.5°	409.7	411.1	413.0	412.9	413.0	411.1	409.7	408.1	406.3	403.6	402.9
55°	378.6	379.5	380.5	380.9	380.5	379.5	378.6	374.9	373.4	372.0	369.7
57.5°	346.3	345.9	348.1	348.8	348.1	345.9	346.3	343.0	340.8	336.5	335.9
60°	323.5	323.5	327.3	328.7	327.3	323.5	323.5	319.8	316.5	313.7	312.8
62.5°	299.3	300.8	304.4	302.5	304.4	300.8	299.3	295.2	292.6	289.1	286.6
65°	263.8	267.5	267.1	268.9	267.1	267.5	263.8	261.4	256.3	253.0	250.2
67.5°	226.7	229.0	232.4	232.6	232.4	229.0	226.7	222.9	219.6	216.2	212.8
70°	201.7	204.0	205.9	207.2	205.9	204.0	201.7	198.0	194.2	191.9	188.2
72.5°	177.4	178.6	183.1	181.1	183.1	178.6	177.4	172.9	170.0	168.0	163.9
75°	139.1	142.4	145.2	143.7	145.2	142.4	139.1	135.8	133.5	130.7	127.0
77.5°	102.9	106.1	107.5	106.3	107.5	106.1	102.9	100.8	99.5	94.0	93.6
80°	81.2	80.8	83.6	83.1	83.6	80.8	81.2	77.9	75.6	72.3	72.3
82.5°	59.6	59.1	60.4	60.7	60.4	59.1	59.6	57.8	54.8	53.3	52.2
85°	29.0	30.3	28.4	28.0	28.4	30.3	29.0	27.1	27.1	27.1	26.6
87.5°	12.7	12.8	12.5	12.2	12.5	12.8	12.7	12.6	13.9	12.7	12.4
90°	29.7	30.1	30.6	31.1	30.6	30.1	29.7	29.2	28.5	27.6	26.7
92.5°	33.5	33.9	34.2	34.4	34.2	33.9	33.5	33.3	32.5	30.9	29.4
95°	39.3	39.3	39.3	39.3	39.3	39.3	39.3	39.3	38.5	36.9	35.3
97.5°	42.0	42.3	42.4	42.7	42.4	42.3	42.0	41.7	40.8	38.9	37.0
100°	42.8	43.1	43.2	43.5	43.2	43.1	42.8	42.6	41.6	39.7	37.9
102.5°	43.1	43.5	44.0	44.3	44.0	43.5	43.1	42.7	45.3	51.0	56.7
105°	44.2	44.7	45.1	45.6	45.1	44.7	44.2	43.8	63.8	104.6	145.3
107.5°	235.3	204.6	173.9	143.2	173.9	204.6	235.3	266.0	296.3	326.2	356.1
110°	383.7	350.7	317.8	284.9	317.8	350.7	383.7	416.6	436.8	444.4	452.0

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	509.6	502.7	495.7	488.7	495.7	502.7	509.6	516.6	520.0	519.9	519.7
115°	606.4	607.3	608.2	609.1	608.2	607.3	606.4	605.5	603.9	601.5	599.2
117.5°	676.2	676.4	676.5	676.7	676.5	676.4	676.2	676.0	674.9	673.2	671.3
120°	723.1	723.1	723.1	723.1	723.1	723.1	723.1	723.1	722.2	720.3	718.5
122.5°	768.1	768.3	768.6	768.7	768.6	768.3	768.1	767.9	767.2	766.0	764.6
125°	831.5	832.1	832.5	832.9	832.5	832.1	831.5	831.1	830.6	830.2	829.7
127.5°	896.1	895.6	895.2	894.7	895.2	895.6	896.1	896.5	896.3	895.6	894.9
130°	935.9	935.4	935.0	934.5	935.0	935.4	935.9	936.3	936.1	935.1	934.2
132.5°	972.9	972.2	971.6	970.9	971.6	972.2	972.9	973.5	973.4	972.5	971.5
135°	1028.8	1028.1	1027.3	1026.7	1027.3	1028.1	1028.8	1029.5	1029.5	1028.8	1028.1
137.5°	1080.5	1080.0	1079.6	1079.1	1079.6	1080.0	1080.5	1080.9	1080.6	1079.5	1078.4
140°	1112.0	1111.5	1111.1	1110.6	1111.1	1111.5	1112.0	1112.4	1112.2	1111.3	1110.4
142.5°	1141.6	1140.9	1140.2	1139.6	1140.2	1140.9	1141.6	1142.2	1142.1	1141.4	1140.7
145°	1184.1	1184.1	1184.1	1184.1	1184.1	1184.1	1184.1	1184.1	1183.9	1183.5	1183.0
147.5°	1220.5	1219.4	1218.3	1217.3	1218.3	1219.4	1220.5	1221.6	1221.8	1221.4	1220.9
150°	1244.2	1243.6	1242.9	1242.2	1242.9	1243.6	1244.2	1244.9	1245.0	1244.6	1244.1
152.5°	1265.2	1264.2	1263.1	1262.0	1263.1	1264.2	1265.2	1266.3	1266.4	1265.6	1264.7
155°	1294.0	1292.6	1291.2	1289.9	1291.2	1292.6	1294.0	1295.3	1295.5	1294.3	1293.2
157.5°	1318.7	1316.8	1315.0	1313.2	1315.0	1316.8	1318.7	1320.4	1320.6	1319.2	1317.9
160°	1333.0	1331.4	1329.7	1328.1	1329.7	1331.4	1333.0	1334.6	1334.7	1333.3	1331.9
162.5°	1346.5	1345.1	1343.6	1342.2	1343.6	1345.1	1346.5	1347.9	1347.9	1346.3	1344.8
165°	1364.1	1362.4	1360.8	1359.2	1360.8	1362.4	1364.1	1365.7	1365.6	1363.7	1361.9
167.5°	1377.0	1375.1	1373.3	1371.5	1373.3	1375.1	1377.0	1378.9	1378.9	1377.0	1375.1
170°	1384.5	1382.6	1380.7	1378.9	1380.7	1382.6	1384.5	1386.3	1386.3	1384.5	1382.6
172.5°	1389.1	1387.1	1385.1	1383.0	1385.1	1387.1	1389.1	1391.2	1391.2	1389.4	1387.6
175°	1394.8	1392.9	1391.2	1389.3	1391.2	1392.9	1394.8	1396.6	1396.8	1395.2	1393.6
177.5°	1396.7	1394.8	1392.9	1391.2	1392.9	1394.8	1396.7	1398.5	1398.6	1397.2	1395.7
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	923.9	923.9	931.0	935.5	941.1	944.9	947.4	950.1	954.6	960.6	967.2
5°	871.1	873.0	883.2	893.5	903.3	911.7	918.7	927.1	937.4	950.0	964.0
7.5°	819.9	827.2	837.5	850.0	863.7	875.9	888.4	902.2	916.7	935.2	954.8
10°	787.1	795.0	807.6	823.5	837.9	852.4	867.8	882.8	901.0	922.9	948.2
12.5°	758.3	765.9	778.8	796.2	809.9	825.9	843.6	863.0	883.4	909.8	938.4
15°	718.5	727.3	743.2	751.6	772.6	791.8	808.1	836.1	862.2	889.3	922.5
17.5°	685.7	690.7	703.6	719.2	734.9	756.3	777.8	801.1	827.2	860.2	901.7
20°	663.3	667.5	681.5	697.9	714.7	734.3	753.5	776.8	806.2	841.2	886.0
22.5°	646.6	651.1	660.3	677.7	693.4	709.7	728.8	756.6	787.9	822.2	870.8
25°	622.2	625.1	631.2	645.2	659.2	677.3	694.2	720.3	752.5	792.6	841.2
27.5°	599.2	601.9	607.0	617.1	630.1	644.9	663.2	685.4	718.1	761.7	813.2
30°	585.4	585.9	590.6	599.9	611.1	623.2	640.0	665.2	696.1	740.4	794.5
32.5°	573.5	571.7	574.9	581.9	592.8	604.9	618.8	643.5	673.2	716.8	772.5
35°	553.2	552.2	550.9	557.0	566.2	575.6	587.7	606.5	640.0	680.6	739.0
37.5°	532.5	530.3	527.8	530.6	537.9	547.6	558.1	574.8	603.7	648.5	704.3
40°	517.3	515.4	514.0	513.0	519.6	528.9	536.8	552.7	579.8	622.2	677.3
42.5°	500.4	499.4	497.6	496.2	501.7	508.7	517.0	531.1	558.1	598.0	650.1
45°	473.3	472.4	471.5	470.6	473.9	480.4	486.9	497.1	520.5	559.3	606.5
47.5°	443.2	442.0	442.4	440.9	444.1	448.4	453.0	464.0	486.4	517.7	552.1
50°	421.5	421.1	421.1	421.1	422.0	427.1	431.3	439.8	460.3	491.6	516.3
52.5°	401.0	399.0	399.0	399.8	401.4	404.7	407.4	416.6	434.5	460.2	482.7
55°	368.8	365.1	364.1	365.1	366.5	369.3	372.0	379.5	394.9	414.1	427.1
57.5°	333.1	331.1	329.8	330.0	330.8	333.1	335.2	343.3	355.4	365.4	373.8
60°	308.1	309.1	304.9	305.8	305.8	307.6	310.9	316.0	326.3	333.3	341.7
62.5°	284.5	283.3	282.0	280.7	280.7	281.5	285.9	289.9	298.6	302.3	308.9
65°	247.9	247.9	245.0	246.0	246.5	243.3	245.6	250.2	255.8	257.3	263.3
67.5°	210.7	209.5	207.9	206.4	206.4	206.2	207.3	209.7	213.9	214.4	219.0
70°	185.3	184.4	184.0	182.5	180.7	183.0	181.6	184.0	186.3	186.7	189.5
72.5°	160.7	159.7	158.9	157.5	156.8	156.5	156.6	159.3	160.9	160.2	163.4
75°	125.6	124.7	123.7	121.4	121.4	119.9	120.5	122.3	124.2	122.8	125.6
77.5°	92.2	89.3	89.2	89.8	88.2	88.5	87.9	87.7	88.5	88.6	91.1
80°	71.0	67.7	68.7	68.1	67.7	67.2	66.3	66.8	67.2	67.7	69.1
82.5°	51.2	50.9	49.9	49.8	49.4	48.2	47.6	48.4	49.0	48.7	49.7
85°	26.1	24.7	25.7	25.2	25.7	25.2	23.8	23.8	24.7	24.3	25.2
87.5°	13.0	12.8	11.9	11.6	10.6	10.4	9.5	9.5	9.4	8.9	9.2
90°	25.8	24.9	21.8	18.9	15.9	12.9	10.3	7.9	5.6	3.3	1.1
92.5°	28.0	26.5	24.3	22.0	19.8	17.5	16.7	17.3	18.0	18.6	19.3
95°	33.7	32.1	29.6	27.0	24.5	22.0	25.4	34.9	44.3	53.8	63.2
97.5°	35.2	33.3	49.9	66.5	83.1	99.7	110.0	114.3	118.5	122.8	127.0
100°	36.0	34.2	70.1	106.0	142.0	177.8	193.5	188.9	184.3	179.7	175.0
102.5°	62.4	68.1	107.4	146.6	185.8	225.1	243.1	239.7	236.4	233.1	229.8
105°	186.1	226.9	247.6	268.3	289.0	309.8	318.9	316.3	313.8	311.3	308.7
107.5°	385.9	415.9	412.6	409.3	406.1	402.8	400.1	398.1	396.1	394.0	392.0
110°	459.7	467.3	464.7	462.2	459.7	457.1	455.0	453.1	451.2	449.4	447.5

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	519.6	519.4	516.9	514.4	511.8	509.3	507.2	505.6	503.9	502.2	500.6
115°	597.0	594.7	592.6	590.5	588.4	586.4	584.6	583.3	581.8	580.5	579.2
117.5°	669.4	667.6	666.6	665.5	664.4	663.3	662.0	660.3	658.5	656.8	655.1
120°	716.7	714.8	714.2	713.5	712.7	712.1	710.7	708.6	706.6	704.5	702.4
122.5°	763.4	762.1	761.2	760.4	759.5	758.6	757.3	755.5	753.9	752.2	750.5
125°	829.3	828.8	827.9	827.0	826.0	825.1	823.8	821.9	820.0	818.2	816.4
127.5°	894.2	893.4	892.3	891.3	890.1	889.0	887.5	885.7	883.9	882.0	880.2
130°	933.4	932.4	931.5	930.6	929.6	928.7	927.3	925.5	923.6	921.9	920.0
132.5°	970.6	969.7	968.9	968.2	967.5	966.7	965.5	963.6	961.8	959.9	958.1
135°	1027.3	1026.7	1025.7	1024.8	1024.0	1023.0	1021.8	1020.5	1019.0	1017.7	1016.3
137.5°	1077.3	1076.2	1075.7	1075.2	1074.7	1074.2	1073.1	1071.3	1069.5	1067.8	1066.0
140°	1109.5	1108.5	1107.9	1107.1	1106.4	1105.7	1104.7	1103.3	1102.0	1100.5	1099.2
142.5°	1140.0	1139.2	1138.5	1137.8	1137.1	1136.4	1135.4	1134.0	1132.7	1131.2	1129.9
145°	1182.5	1182.1	1181.6	1181.2	1180.7	1180.3	1179.2	1177.6	1176.0	1174.4	1172.8
147.5°	1220.5	1219.9	1219.5	1219.1	1218.6	1218.2	1217.4	1216.3	1215.3	1214.2	1213.2
150°	1243.7	1243.2	1242.8	1242.2	1241.8	1241.4	1240.8	1240.1	1239.4	1238.7	1238.1
152.5°	1263.9	1263.1	1262.8	1262.6	1262.2	1261.9	1261.7	1261.3	1261.1	1260.7	1260.4
155°	1292.0	1290.8	1290.7	1290.4	1290.1	1289.9	1290.0	1290.5	1290.9	1291.5	1291.9
157.5°	1316.5	1315.1	1315.4	1315.5	1315.8	1316.0	1316.2	1316.2	1316.3	1316.3	1316.3
160°	1330.6	1329.2	1329.5	1329.6	1329.9	1330.1	1330.3	1330.6	1330.8	1331.1	1331.2
162.5°	1343.2	1341.6	1341.8	1342.1	1342.3	1342.6	1342.9	1343.5	1344.2	1344.8	1345.3
165°	1360.0	1358.2	1358.4	1358.6	1358.9	1359.1	1359.6	1360.3	1360.9	1361.6	1362.4
167.5°	1373.3	1371.5	1371.5	1371.5	1371.5	1371.5	1371.9	1372.9	1373.8	1374.7	1375.6
170°	1380.7	1378.9	1378.9	1378.9	1378.9	1378.9	1379.4	1380.3	1381.3	1382.2	1383.0
172.5°	1385.7	1383.8	1383.7	1383.5	1383.3	1383.1	1383.6	1384.7	1385.8	1387.0	1388.0
175°	1392.0	1390.3	1390.1	1389.8	1389.6	1389.4	1389.8	1391.0	1392.1	1393.3	1394.5
177.5°	1394.3	1392.8	1392.6	1392.4	1392.2	1392.0	1392.4	1393.4	1394.3	1395.2	1396.2
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	969.5	971.3	977.8	982.2	987.4	990.4	993.4	995.7	998.6	999.3	1010.2
5°	973.8	983.1	999.5	1011.6	1026.5	1042.9	1054.1	1059.3	1072.7	1084.0	1106.3
7.5°	972.6	992.5	1017.1	1042.7	1070.1	1095.6	1117.6	1143.7	1162.3	1190.3	1217.7
10°	971.4	998.1	1029.8	1062.5	1100.8	1136.2	1168.0	1203.5	1232.9	1271.7	1304.8
12.5°	968.1	1000.3	1044.4	1083.1	1129.5	1178.5	1225.5	1271.0	1297.1	1361.6	1392.1
15°	959.8	998.1	1053.2	1112.0	1175.9	1233.9	1293.6	1341.2	1418.2	1474.7	1510.6
17.5°	944.0	997.6	1062.8	1133.8	1211.6	1287.9	1355.6	1427.8	1509.5	1577.9	1650.7
20°	936.5	995.2	1068.1	1146.6	1227.3	1313.7	1390.7	1477.5	1566.6	1633.9	1727.2
22.5°	922.7	989.3	1067.7	1155.1	1241.4	1330.8	1420.9	1508.5	1611.5	1704.1	1793.0
25°	900.0	974.7	1056.0	1153.5	1254.8	1344.4	1452.3	1568.5	1675.9	1794.9	1883.6
27.5°	876.3	956.1	1037.5	1128.2	1237.2	1343.5	1479.2	1610.5	1741.9	1844.6	1910.2
30°	858.0	935.5	1019.6	1111.1	1218.9	1345.4	1497.1	1640.4	1768.4	1856.5	1893.5
32.5°	838.2	916.9	991.1	1087.2	1202.1	1344.3	1508.3	1658.0	1769.9	1828.5	1821.4
35°	807.2	873.0	945.3	1037.8	1173.1	1336.1	1514.8	1659.6	1728.2	1715.6	1620.3
37.5°	762.3	817.7	888.9	990.2	1139.5	1318.8	1501.8	1610.3	1605.9	1503.2	1365.3
40°	734.3	781.5	850.1	956.5	1113.4	1307.6	1481.2	1551.8	1492.0	1348.6	1183.4
42.5°	697.8	741.1	809.8	919.2	1084.6	1284.8	1442.0	1462.5	1345.6	1180.6	1029.1
45°	641.0	679.2	750.2	863.2	1041.5	1235.2	1346.3	1296.4	1139.1	968.7	853.4
47.5°	580.0	619.7	688.0	804.1	979.1	1160.7	1213.5	1107.3	945.7	807.6	701.8
50°	541.5	579.8	646.6	763.8	936.9	1099.4	1121.3	984.1	835.6	714.3	627.4
52.5°	502.7	538.7	604.3	721.9	887.6	1028.4	1014.9	875.0	738.5	635.1	566.9
55°	444.9	478.9	541.5	651.7	802.5	914.0	865.0	731.6	618.6	538.2	486.4
57.5°	393.2	425.9	479.8	579.3	710.4	787.1	724.7	612.2	522.4	460.6	422.0
60°	358.0	387.0	438.4	530.7	644.7	703.0	641.4	542.0	466.4	416.9	382.4
62.5°	324.9	350.0	397.6	481.5	580.4	629.5	567.1	483.0	418.6	374.7	345.4
65°	274.5	297.4	339.4	404.7	486.0	518.6	464.9	396.8	346.9	314.1	294.5
67.5°	228.5	248.0	284.3	335.7	395.5	419.3	378.4	325.7	288.0	261.8	246.2
70°	198.0	214.7	243.3	287.6	341.7	359.9	321.6	278.2	250.7	229.7	215.2
72.5°	172.2	184.5	210.4	244.6	289.8	304.3	277.6	239.4	213.7	198.0	186.5
75°	131.2	141.4	158.3	185.8	217.0	225.5	205.4	181.6	164.3	153.1	144.3
77.5°	94.6	102.1	114.3	131.3	152.9	160.5	147.8	131.9	119.3	111.7	106.8
80°	71.4	77.5	87.7	101.7	114.9	119.0	111.6	99.4	90.6	86.4	82.1
82.5°	52.8	56.2	62.3	71.9	80.9	85.8	79.5	72.1	67.4	63.6	62.0
85°	26.6	28.4	31.3	35.0	40.6	42.4	40.1	38.3	35.5	33.2	33.2
87.5°	10.3	10.9	12.4	13.6	15.7	17.4	17.6	17.5	17.7	17.5	17.3
90°	3.3	5.6	7.9	10.3	12.9	15.9	18.9	21.8	24.9	25.8	26.7
92.5°	18.6	18.0	17.3	16.7	17.5	19.8	22.0	24.3	26.5	28.0	29.4
95°	53.8	44.3	34.9	25.4	22.0	24.5	27.0	29.6	32.1	33.7	35.3
97.5°	122.8	118.5	114.3	110.0	99.7	83.1	66.5	49.9	33.3	35.2	37.0
100°	179.7	184.3	188.9	193.5	177.8	142.0	106.0	70.1	34.2	36.0	37.9
102.5°	233.1	236.4	239.7	243.1	225.1	185.8	146.6	107.4	68.1	62.4	56.7
105°	311.3	313.8	316.3	318.9	309.8	289.0	268.3	247.6	226.9	186.1	145.3
107.5°	394.0	396.1	398.1	400.1	402.8	406.1	409.3	412.6	415.9	385.9	356.1
110°	449.4	451.2	453.1	455.0	457.1	459.7	462.2	464.7	467.3	459.7	452.0

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	502.2	503.9	505.6	507.2	509.3	511.8	514.4	516.9	519.4	519.6	519.7
115°	580.5	581.8	583.3	584.6	586.4	588.4	590.5	592.6	594.7	597.0	599.2
117.5°	656.8	658.5	660.3	662.0	663.3	664.4	665.5	666.6	667.6	669.4	671.3
120°	704.5	706.6	708.6	710.7	712.1	712.7	713.5	714.2	714.8	716.7	718.5
122.5°	752.2	753.9	755.5	757.3	758.6	759.5	760.4	761.2	762.1	763.4	764.6
125°	818.2	820.0	821.9	823.8	825.1	826.0	827.0	827.9	828.8	829.3	829.7
127.5°	882.0	883.9	885.7	887.5	889.0	890.1	891.3	892.3	893.4	894.2	894.9
130°	921.9	923.6	925.5	927.3	928.7	929.6	930.6	931.5	932.4	933.4	934.2
132.5°	959.9	961.8	963.6	965.5	966.7	967.5	968.2	968.9	969.7	970.6	971.5
135°	1017.7	1019.0	1020.5	1021.8	1023.0	1024.0	1024.8	1025.7	1026.7	1027.3	1028.1
137.5°	1067.8	1069.5	1071.3	1073.1	1074.2	1074.7	1075.2	1075.7	1076.2	1077.3	1078.4
140°	1100.5	1102.0	1103.3	1104.7	1105.7	1106.4	1107.1	1107.9	1108.5	1109.5	1110.4
142.5°	1131.2	1132.7	1134.0	1135.4	1136.4	1137.1	1137.8	1138.5	1139.2	1140.0	1140.7
145°	1174.4	1176.0	1177.6	1179.2	1180.3	1180.7	1181.2	1181.6	1182.1	1182.5	1183.0
147.5°	1214.2	1215.3	1216.3	1217.4	1218.2	1218.6	1219.1	1219.5	1219.9	1220.5	1220.9
150°	1238.7	1239.4	1240.1	1240.8	1241.4	1241.8	1242.2	1242.8	1243.2	1243.7	1244.1
152.5°	1260.7	1261.1	1261.3	1261.7	1261.9	1262.2	1262.6	1262.8	1263.1	1263.9	1264.7
155°	1291.5	1290.9	1290.5	1290.0	1289.9	1290.1	1290.4	1290.7	1290.8	1292.0	1293.2
157.5°	1316.3	1316.3	1316.2	1316.2	1316.0	1315.8	1315.5	1315.4	1315.1	1316.5	1317.9
160°	1331.1	1330.8	1330.6	1330.3	1330.1	1329.9	1329.6	1329.5	1329.2	1330.6	1331.9
162.5°	1344.8	1344.2	1343.5	1342.9	1342.6	1342.3	1342.1	1341.8	1341.6	1343.2	1344.8
165°	1361.6	1360.9	1360.3	1359.6	1359.1	1358.9	1358.6	1358.4	1358.2	1360.0	1361.9
167.5°	1374.7	1373.8	1372.9	1371.9	1371.5	1371.5	1371.5	1371.5	1371.5	1373.3	1375.1
170°	1382.2	1381.3	1380.3	1379.4	1378.9	1378.9	1378.9	1378.9	1378.9	1380.7	1382.6
172.5°	1387.0	1385.8	1384.7	1383.6	1383.1	1383.3	1383.5	1383.7	1383.8	1385.7	1387.6
175°	1393.3	1392.1	1391.0	1389.8	1389.4	1389.6	1389.8	1390.1	1390.3	1392.0	1393.6
177.5°	1395.2	1394.3	1393.4	1392.4	1392.0	1392.2	1392.4	1392.6	1392.8	1394.3	1395.7
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	963.5	963.5	963.5	963.5	963.5	963.5	963.5
2.5°	1014.0	1014.3	1018.4	1021.5	1019.9	1021.8	1022.5
5°	1107.8	1124.6	1133.5	1140.0	1140.5	1140.9	1144.7
7.5°	1240.8	1258.8	1272.0	1292.0	1298.0	1304.8	1302.8
10°	1337.9	1364.5	1387.4	1399.5	1412.6	1431.7	1416.4
12.5°	1428.7	1475.9	1510.6	1529.6	1541.9	1545.7	1538.1
15°	1578.3	1639.9	1673.1	1672.1	1714.2	1732.4	1703.9
17.5°	1715.6	1772.5	1818.0	1841.4	1876.3	1884.1	1880.5
20°	1799.7	1861.7	1897.2	1937.3	1955.5	1971.8	1974.7
22.5°	1872.1	1927.8	1965.9	1999.3	2014.6	2022.3	2026.9
25°	1946.7	1990.6	2013.4	2025.1	2029.3	2028.4	2022.3
27.5°	1941.5	1944.9	1919.7	1895.0	1872.9	1847.9	1839.3
30°	1891.1	1851.9	1781.9	1742.2	1683.8	1637.6	1656.3
32.5°	1758.5	1680.5	1601.9	1515.1	1443.3	1422.9	1402.3
35°	1500.8	1363.6	1283.4	1189.9	1152.6	1115.3	1089.6
37.5°	1214.2	1108.0	1012.8	951.7	914.4	890.7	878.0
40°	1049.9	954.2	875.7	826.3	797.8	771.2	767.5
42.5°	918.8	829.8	770.8	731.4	704.1	692.8	684.6
45°	752.5	690.5	650.8	622.8	604.6	597.5	588.2
47.5°	636.9	593.1	563.3	544.2	530.5	525.3	524.5
50°	572.3	535.9	514.0	499.0	488.3	486.4	478.9
52.5°	523.8	492.2	475.1	462.1	454.3	449.1	446.8
55°	454.7	433.6	418.3	410.8	404.7	399.6	399.6
57.5°	397.8	380.3	370.1	363.7	361.9	358.2	355.9
60°	362.7	347.8	339.8	334.2	330.6	331.0	326.8
62.5°	328.3	318.7	311.1	305.5	301.0	301.1	301.4
65°	279.6	272.2	266.5	264.7	261.9	258.6	259.6
67.5°	236.9	230.0	225.6	222.4	221.5	219.7	222.4
70°	206.3	201.2	198.0	195.1	194.2	194.7	197.0
72.5°	178.3	174.7	172.5	171.2	169.2	169.2	170.9
75°	140.1	137.2	135.4	133.9	133.5	133.5	133.5
77.5°	102.9	102.3	101.4	99.3	99.4	100.0	100.0
80°	81.2	79.8	79.4	78.5	77.0	76.1	78.5
82.5°	60.7	59.3	58.9	58.7	56.4	56.3	58.2
85°	32.6	31.3	31.7	31.3	31.3	30.9	30.9
87.5°	17.1	16.9	16.7	17.1	16.9	16.6	17.4
90°	27.6	28.5	29.2	29.7	30.1	30.6	31.1
92.5°	30.9	32.5	33.3	33.5	33.9	34.2	34.4
95°	36.9	38.5	39.3	39.3	39.3	39.3	39.3
97.5°	38.9	40.8	41.7	42.0	42.3	42.4	42.7
100°	39.7	41.6	42.6	42.8	43.1	43.2	43.5
102.5°	51.0	45.3	42.7	43.1	43.5	44.0	44.3
105°	104.6	63.8	43.8	44.2	44.7	45.1	45.6
107.5°	326.2	296.3	266.0	235.3	204.6	173.9	143.2
110°	444.4	436.8	416.6	383.7	350.7	317.8	284.9

TEST NUMBER: P331991-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	519.9	520.0	516.6	509.6	502.7	495.7	488.7
115°	601.5	603.9	605.5	606.4	607.3	608.2	609.1
117.5°	673.2	674.9	676.0	676.2	676.4	676.5	676.7
120°	720.3	722.2	723.1	723.1	723.1	723.1	723.1
122.5°	766.0	767.2	767.9	768.1	768.3	768.6	768.7
125°	830.2	830.6	831.1	831.5	832.1	832.5	832.9
127.5°	895.6	896.3	896.5	896.1	895.6	895.2	894.7
130°	935.1	936.1	936.3	935.9	935.4	935.0	934.5
132.5°	972.5	973.4	973.5	972.9	972.2	971.6	970.9
135°	1028.8	1029.5	1029.5	1028.8	1028.1	1027.3	1026.7
137.5°	1079.5	1080.6	1080.9	1080.5	1080.0	1079.6	1079.1
140°	1111.3	1112.2	1112.4	1112.0	1111.5	1111.1	1110.6
142.5°	1141.4	1142.1	1142.2	1141.6	1140.9	1140.2	1139.6
145°	1183.5	1183.9	1184.1	1184.1	1184.1	1184.1	1184.1
147.5°	1221.4	1221.8	1221.6	1220.5	1219.4	1218.3	1217.3
150°	1244.6	1245.0	1244.9	1244.2	1243.6	1242.9	1242.2
152.5°	1265.6	1266.4	1266.3	1265.2	1264.2	1263.1	1262.0
155°	1294.3	1295.5	1295.3	1294.0	1292.6	1291.2	1289.9
157.5°	1319.2	1320.6	1320.4	1318.7	1316.8	1315.0	1313.2
160°	1333.3	1334.7	1334.6	1333.0	1331.4	1329.7	1328.1
162.5°	1346.3	1347.9	1347.9	1346.5	1345.1	1343.6	1342.2
165°	1363.7	1365.6	1365.7	1364.1	1362.4	1360.8	1359.2
167.5°	1377.0	1378.9	1378.9	1377.0	1375.1	1373.3	1371.5
170°	1384.5	1386.3	1386.3	1384.5	1382.6	1380.7	1378.9
172.5°	1389.4	1391.2	1391.2	1389.1	1387.1	1385.1	1383.0
175°	1395.2	1396.8	1396.6	1394.8	1392.9	1391.2	1389.3
177.5°	1397.2	1398.6	1398.5	1396.7	1394.8	1392.9	1391.2
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5

(END OF REPORT)