

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831633

Luminaire Tested: S123DIP-S775D1195U940-4F0-1E-UDD-G

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831633
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-5)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D1195U940-4F0-1E-UDD-G
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1195 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7416.4 lumens
Efficiency: N/A
Efficacy: 130.3 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

Luminous Intensity Polar Plot

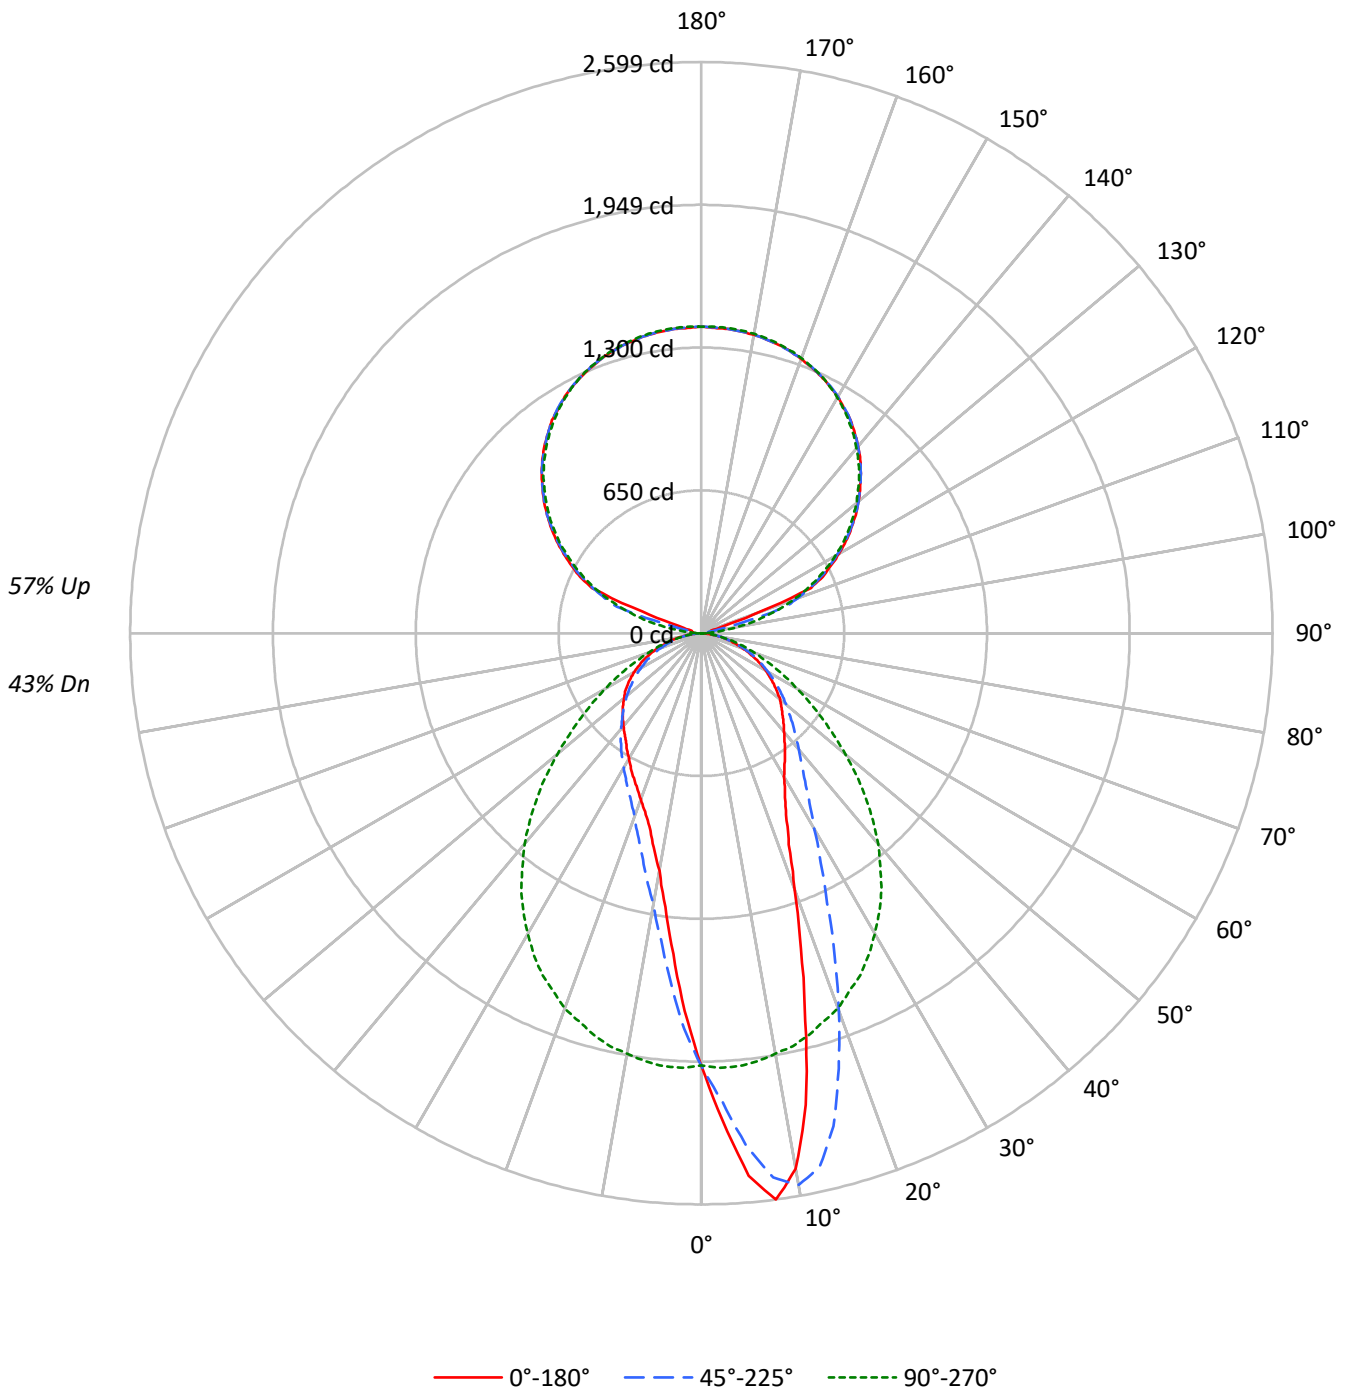



TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	43				
1	97	92	89	85	88	85	82	79	70	68	66	57	55	54	44	43	43	37				
2	88	81	75	71	81	75	70	65	62	58	55	50	48	46	40	38	37	32				
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	33	32	27				
4	74	64	56	51	68	59	52	47	49	44	41	40	37	34	32	30	28	24				
5	68	57	50	44	62	53	46	41	44	39	35	37	33	30	29	27	25	21				
6	63	52	44	38	58	48	41	36	40	35	31	33	30	27	27	24	22	19				
7	59	47	39	34	54	43	37	32	37	32	28	31	27	24	25	22	20	17				
8	54	43	35	30	50	40	33	28	34	29	25	28	24	21	23	20	18	16				
9	51	39	32	27	47	36	30	26	31	26	22	26	22	19	21	19	17	14				
10	48	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15	13				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	21177	21177	21177	21177	21177
5°	26782	25278	21367	17219	15823
10°	27042	27860	21225	13726	11995
15°	20367	25867	21080	11624	10143
20°	14191	20931	20811	10165	9213
25°	10821	16096	20352	9352	8641
30°	9362	12788	19619	8777	8181
35°	8686	10797	18775	8361	7858
40°	8223	9686	17588	7966	7748
45°	7949	8965	16079	7657	7700
50°	7812	8393	14294	7376	7659
55°	7522	7976	12542	7111	7692
60°	7253	7528	10809	6859	7567
65°	6813	7103	9324	6592	7417
70°	6291	6565	7931	6150	6980
75°	5693	5885	6796	5714	6380
80°	4699	5151	5374	4978	5374
85°	3717	4174	3952	4224	4286

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 18358 cd/sqm



TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.0	2.5
10°-20°	462.7	6.2
20°-30°	547.9	7.4
30°-40°	550.9	7.4
40°-50°	505.4	6.8
50°-60°	417.2	5.6
60°-70°	295.1	4.0
70°-80°	157.5	2.1
80°-90°	42.8	0.6
90°-100°	49.2	0.7
100°-110°	237.7	3.2
110°-120°	582.6	7.9
120°-130°	739.6	10.0
130°-140°	790.1	10.7
140°-150°	738.8	10.0
150°-160°	595.9	8.0
160°-170°	384.6	5.2
170°-180°	132.5	1.8
0°-30°	1196.6	16.1
0°-40°	1747.5	23.6
0°-60°	2670.1	36.0
0°-90°	3165.5	42.7
90°-120°	869.4	11.7
90°-150°	3137.9	42.3
90°-180°	4251.0	57.3
0°-180°	7416.4	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	1967	1967	1967	1967	1967	
5°	2479	2340	1978	1594	1464	236
15°	1828	2321	1892	1043	910	505
25°	911	1355	1714	787	728	430
35°	661	822	1429	636	598	415
45°	522	589	1056	503	506	404
55°	401	425	668	379	410	359
65°	268	279	366	259	291	266
75°	137	142	163	137	153	144
85°	30	34	32	34	35	34
90°	31	25	1	25	31	15
95°	39	32	63	32	39	33
105°	46	227	309	227	46	95
115°	609	595	579	595	609	573
125°	833	829	816	829	833	744
135°	1027	1027	1016	1027	1027	792
145°	1184	1182	1173	1182	1184	739
155°	1290	1291	1292	1291	1290	595
165°	1359	1358	1362	1358	1359	384
175°	1389	1390	1394	1390	1389	132
180°	1394	1394	1394	1394	1394	



TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4
2.5°	2217.6	2215.3	2213.0	2201.6	2190.2	2184.7	2179.2	2162.8	2146.4	2128.1	2109.8
5°	2478.7	2485.1	2491.5	2484.2	2476.9	2454.5	2432.1	2402.5	2372.8	2339.5	2306.1
7.5°	2599.2	2602.8	2606.5	2601.9	2597.4	2591.4	2585.5	2559.0	2532.5	2498.3	2464.1
10°	2474.1	2482.3	2490.6	2508.4	2526.2	2546.2	2566.3	2562.7	2559.0	2549.0	2538.9
12.5°	2199.3	2209.4	2219.4	2255.0	2290.6	2336.3	2381.9	2421.2	2460.4	2487.8	2515.2
15°	1827.7	1855.6	1883.4	1915.8	1948.3	2015.4	2082.5	2165.1	2247.7	2321.2	2394.7
17.5°	1505.5	1516.0	1526.5	1561.2	1595.9	1680.3	1764.8	1860.2	1955.6	2077.4	2199.3
20°	1238.9	1248.5	1258.1	1303.7	1349.4	1415.5	1481.7	1589.0	1696.3	1827.3	1958.3
22.5°	1040.8	1055.8	1070.9	1096.5	1122.0	1185.5	1248.9	1344.3	1439.7	1584.4	1729.1
25°	911.1	922.1	933.0	948.6	964.1	1014.8	1065.4	1143.9	1222.5	1355.3	1488.1
27.5°	822.6	827.1	831.7	847.2	862.7	895.6	928.5	996.0	1063.6	1176.3	1289.1
30°	753.2	756.4	759.6	773.3	787.0	809.3	831.7	880.5	929.4	1028.9	1128.4
32.5°	704.8	707.1	709.4	719.9	730.4	746.3	762.3	797.9	833.5	915.7	997.9
35°	661.0	662.4	663.7	671.5	679.2	691.1	703.0	729.9	756.8	821.7	886.5
37.5°	622.6	624.5	626.3	630.9	635.4	645.9	656.4	677.9	699.3	749.1	798.8
40°	585.2	588.4	591.6	594.8	598.0	606.7	615.3	631.8	648.2	689.3	730.4
42.5°	553.3	556.4	559.6	561.0	562.4	567.4	572.4	587.5	602.6	633.1	663.7
45°	522.2	523.6	525.0	526.3	527.7	531.8	535.9	549.1	562.4	588.9	615.3
47.5°	493.9	493.9	493.9	494.8	495.7	499.4	503.0	512.6	522.2	542.8	563.3
50°	466.5	466.5	466.5	465.2	463.8	466.1	468.3	475.7	483.0	501.2	519.5
52.5°	433.7	433.7	433.7	434.1	434.6	434.6	434.6	441.0	447.4	463.8	480.2
55°	400.8	402.6	404.4	403.1	401.7	402.6	403.5	407.6	411.7	425.0	438.2
57.5°	367.9	368.8	369.7	369.3	368.8	369.3	369.7	373.4	377.1	387.1	397.1
60°	336.9	336.9	336.9	336.0	335.1	336.0	336.9	338.7	340.5	349.7	358.8
62.5°	302.2	302.6	303.1	303.6	304.0	303.1	302.2	304.5	306.8	313.6	320.4
65°	267.5	268.0	268.4	269.8	271.1	270.2	269.3	271.6	273.9	278.9	283.9
67.5°	236.5	235.5	234.6	235.1	235.5	236.9	238.3	238.7	239.2	244.7	250.2
70°	199.9	200.9	201.8	201.3	200.9	201.3	201.8	203.1	204.5	208.6	212.7
72.5°	167.1	167.5	168.0	168.0	168.0	168.9	169.8	171.2	172.5	174.8	177.1
75°	136.9	136.9	136.9	137.9	138.8	139.2	139.7	139.7	139.7	141.5	143.3
77.5°	104.1	106.4	108.6	108.2	107.7	108.6	109.6	110.9	112.3	113.2	114.1
80°	75.8	75.8	75.8	76.2	76.7	78.1	79.4	80.3	81.3	83.1	84.9
82.5°	48.4	48.8	49.3	50.7	52.0	53.0	53.9	55.2	56.6	56.6	56.6
85°	30.1	29.2	28.3	29.2	30.1	31.0	32.0	32.4	32.9	33.8	34.7
87.5°	14.6	14.6	14.6	14.6	14.6	15.1	15.5	15.5	15.5	15.5	15.5
90°	31.1	30.6	30.2	29.7	29.2	28.5	27.6	26.7	25.8	24.9	21.9
92.5°	35.2	35.0	34.8	34.5	34.3	33.4	31.8	30.2	28.5	26.9	24.9
95°	39.4	39.4	39.4	39.4	39.4	38.6	37.0	35.3	33.7	32.1	29.6
97.5°	42.5	42.2	42.0	41.8	41.6	40.5	38.7	36.8	35.0	33.2	44.9
100°	43.5	43.3	43.1	42.8	42.6	41.6	39.7	37.9	36.0	34.2	70.1
102.5°	44.5	44.1	43.6	43.2	42.7	46.3	53.9	61.5	69.1	76.7	116.7
105°	45.6	45.1	44.7	44.2	43.7	63.9	104.6	145.4	186.1	226.9	247.6
107.5°	107.7	137.9	168.1	198.2	228.4	261.2	296.6	332.1	367.5	403.0	399.5
110°	284.9	317.8	350.7	383.7	416.6	436.8	444.4	452.0	459.6	467.2	464.7



TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	539.8	540.2	540.7	541.1	541.6	540.8	538.7	536.6	534.6	532.5	530.0
115°	609.2	608.2	607.3	606.4	605.5	603.9	601.6	599.3	597.0	594.7	592.6
117.5°	665.1	664.9	664.7	664.4	664.2	663.2	661.3	659.5	657.6	655.8	654.6
120°	723.1	723.1	723.1	723.1	723.1	722.2	720.4	718.5	716.7	714.8	714.1
122.5°	780.1	779.9	779.6	779.4	779.2	778.5	777.3	776.2	775.0	773.9	773.0
125°	832.9	832.5	832.0	831.6	831.1	830.6	830.2	829.7	829.3	828.8	827.9
127.5°	884.7	885.2	885.7	886.1	886.6	886.5	885.8	885.1	884.4	883.7	882.6
130°	934.5	934.9	935.4	935.9	936.3	936.1	935.2	934.2	933.3	932.4	931.5
132.5°	980.1	980.7	981.4	982.1	982.8	982.7	981.8	980.9	979.9	979.0	978.3
135°	1026.7	1027.4	1028.1	1028.7	1029.4	1029.4	1028.7	1028.1	1027.4	1026.7	1025.8
137.5°	1071.2	1071.7	1072.1	1072.6	1073.1	1072.7	1071.6	1070.4	1069.3	1068.1	1067.7
140°	1110.6	1111.1	1111.5	1112.0	1112.4	1112.2	1111.3	1110.4	1109.4	1108.5	1107.8
142.5°	1146.8	1147.5	1148.2	1148.9	1149.6	1149.6	1148.9	1148.2	1147.5	1146.8	1146.2
145°	1184.1	1184.1	1184.1	1184.1	1184.1	1183.9	1183.5	1183.0	1182.5	1182.1	1181.6
147.5°	1211.1	1212.2	1213.4	1214.5	1215.7	1216.0	1215.6	1215.1	1214.7	1214.2	1213.7
150°	1242.2	1242.9	1243.5	1244.2	1244.9	1245.0	1244.6	1244.1	1243.7	1243.2	1242.7
152.5°	1267.0	1268.2	1269.3	1270.5	1271.6	1271.7	1270.8	1269.9	1269.0	1268.1	1267.8
155°	1289.8	1291.2	1292.6	1294.0	1295.3	1295.5	1294.3	1293.2	1292.0	1290.9	1290.6
157.5°	1309.5	1311.3	1313.2	1315.0	1316.9	1317.1	1315.7	1314.3	1313.0	1311.6	1311.8
160°	1328.1	1329.8	1331.4	1333.0	1334.6	1334.7	1333.3	1331.9	1330.6	1329.2	1329.4
162.5°	1345.8	1347.1	1348.5	1349.9	1351.3	1351.2	1349.6	1347.9	1346.3	1344.7	1345.0
165°	1359.2	1360.8	1362.5	1364.1	1365.7	1365.6	1363.7	1361.9	1360.0	1358.2	1358.4
167.5°	1369.6	1371.4	1373.3	1375.1	1377.0	1377.0	1375.1	1373.3	1371.4	1369.6	1369.6
170°	1378.9	1380.8	1382.6	1384.4	1386.3	1386.3	1384.4	1382.6	1380.8	1378.9	1378.9
172.5°	1384.1	1386.2	1388.2	1390.3	1392.4	1392.5	1390.7	1388.8	1387.0	1385.1	1384.9
175°	1389.3	1391.1	1393.0	1394.8	1396.6	1396.8	1395.1	1393.5	1391.9	1390.3	1390.1
177.5°	1390.3	1392.6	1394.9	1397.2	1399.5	1399.7	1397.9	1396.1	1394.2	1392.4	1392.2
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5



TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4
2.5°	2104.4	2098.9	2078.8	2058.7	2035.9	2013.1	1996.2	1979.3	1954.2	1929.1	1908.5
5°	2280.6	2255.0	2212.6	2170.1	2112.6	2055.1	2016.3	1977.5	1925.4	1873.4	1831.9
7.5°	2420.3	2376.4	2317.1	2257.7	2182.4	2107.1	2035.9	1964.7	1885.3	1805.8	1741.0
10°	2509.3	2479.6	2411.1	2342.7	2241.8	2140.9	2041.4	1941.9	1839.6	1737.4	1651.5
12.5°	2517.9	2520.7	2457.7	2394.7	2280.6	2166.5	2045.5	1924.5	1795.8	1667.1	1567.1
15°	2441.7	2488.7	2454.0	2419.3	2304.3	2189.3	2040.5	1891.7	1743.3	1594.9	1479.5
17.5°	2300.2	2401.1	2406.1	2411.1	2296.1	2181.1	2016.3	1851.5	1683.5	1515.5	1394.1
20°	2107.1	2255.9	2307.0	2358.2	2264.6	2171.0	1993.9	1816.8	1628.7	1440.7	1313.3
22.5°	1909.9	2090.7	2184.3	2277.8	2208.4	2139.1	1950.5	1762.0	1563.4	1364.9	1235.7
25°	1685.3	1882.5	2026.3	2170.1	2127.7	2085.2	1899.4	1713.6	1502.3	1290.9	1159.0
27.5°	1489.5	1689.9	1863.4	2036.8	2027.7	2018.6	1834.1	1649.7	1433.3	1217.0	1089.6
30°	1315.1	1501.8	1695.8	1889.8	1912.2	1934.6	1756.5	1578.5	1361.7	1144.9	1022.1
32.5°	1160.8	1323.8	1531.9	1740.1	1783.9	1827.7	1667.1	1506.4	1291.8	1077.3	959.1
35°	1034.4	1182.3	1390.4	1598.6	1653.4	1708.1	1568.5	1428.8	1219.7	1010.6	897.9
37.5°	922.5	1046.3	1249.4	1452.5	1519.6	1586.7	1461.6	1336.6	1140.7	944.9	841.3
40°	829.9	929.4	1116.1	1302.8	1380.4	1458.0	1354.8	1251.7	1065.9	880.1	784.7
42.5°	752.3	840.8	1010.2	1179.5	1253.9	1328.4	1241.2	1154.0	988.7	823.5	736.3
45°	686.1	756.8	910.7	1064.5	1135.3	1206.0	1131.2	1056.3	910.7	765.1	683.8
47.5°	624.0	684.7	816.2	947.7	1010.6	1073.6	1015.2	956.8	833.5	710.3	636.8
50°	568.3	617.2	732.2	847.2	902.0	956.8	905.2	853.6	752.3	650.9	587.0
52.5°	519.9	559.6	656.0	752.3	799.3	846.3	802.0	757.8	677.4	597.1	541.4
55°	472.0	505.8	589.3	672.9	704.8	736.8	702.5	668.3	603.5	538.6	491.6
57.5°	427.3	457.4	525.9	594.3	619.0	643.6	612.6	581.6	532.7	483.9	444.6
60°	383.4	408.1	465.2	522.2	537.3	552.3	527.2	502.1	467.9	433.7	398.5
62.5°	342.8	365.2	407.6	450.1	460.1	470.2	451.0	431.8	405.8	379.8	352.4
65°	300.8	317.7	352.4	387.1	393.5	399.9	383.0	366.1	346.5	326.8	306.8
67.5°	262.0	273.9	302.2	330.5	330.9	331.4	317.7	304.0	293.1	282.1	266.1
70°	224.1	235.5	254.3	273.0	273.4	273.9	262.9	252.0	243.8	235.5	223.7
72.5°	185.3	193.5	207.7	221.8	220.9	220.0	213.2	206.3	199.9	193.5	184.9
75°	150.2	157.0	166.6	176.2	173.5	170.7	167.1	163.4	157.9	152.5	147.0
77.5°	118.2	122.3	127.8	133.3	131.5	129.6	126.4	123.2	119.1	115.0	112.8
80°	86.7	88.6	92.2	95.9	94.9	94.0	90.4	86.7	85.8	84.9	81.7
82.5°	58.9	61.2	62.1	63.0	62.5	62.1	59.3	56.6	55.7	54.8	54.3
85°	35.1	35.6	36.1	36.5	35.1	33.8	32.9	32.0	32.0	32.0	31.5
87.5°	16.0	16.4	16.4	16.4	16.0	15.5	14.6	13.7	14.2	14.6	14.6
90°	18.9	15.9	12.9	10.2	7.9	5.6	3.3	1.0	3.3	5.6	7.9
92.5°	22.8	20.7	18.6	18.3	19.7	21.1	22.4	23.8	22.4	21.1	19.7
95°	27.1	24.5	22.0	25.4	34.9	44.3	53.8	63.2	53.8	44.3	34.9
97.5°	56.6	68.4	80.1	89.2	95.7	102.1	108.5	115.0	108.5	102.1	95.7
100°	106.0	141.9	177.8	193.5	188.9	184.3	179.7	175.1	179.7	184.3	188.9
102.5°	156.8	196.8	236.9	255.4	252.4	249.4	246.5	243.5	246.5	249.4	252.4
105°	268.3	289.0	309.8	318.9	316.3	313.8	311.3	308.7	311.3	313.8	316.3
107.5°	396.1	392.6	389.2	386.4	384.4	382.3	380.2	378.1	380.2	382.3	384.4
110°	462.2	459.6	457.1	454.9	453.1	451.2	449.4	447.6	449.4	451.2	453.1



TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	527.4	524.9	522.4	520.3	518.7	517.1	515.5	513.9	515.5	517.1	518.7
115°	590.5	588.4	586.4	584.6	583.3	581.9	580.5	579.1	580.5	581.9	583.3
117.5°	653.5	652.3	651.2	649.8	648.2	646.6	645.0	643.4	645.0	646.6	648.2
120°	713.5	712.8	712.1	710.7	708.6	706.6	704.5	702.4	704.5	706.6	708.6
122.5°	772.0	771.1	770.2	768.9	767.3	765.7	764.1	762.5	764.1	765.7	767.3
125°	827.0	826.0	825.1	823.7	821.9	820.0	818.2	816.4	818.2	820.0	821.9
127.5°	881.4	880.3	879.1	877.6	875.8	873.9	872.1	870.2	872.1	873.9	875.8
130°	930.6	929.6	928.7	927.3	925.5	923.6	921.8	920.0	921.8	923.6	925.5
132.5°	977.6	976.9	976.3	975.0	973.1	971.3	969.5	967.6	969.5	971.3	973.1
135°	1024.8	1023.9	1023.0	1021.8	1020.5	1019.1	1017.7	1016.3	1017.7	1019.1	1020.5
137.5°	1067.2	1066.7	1066.3	1065.1	1063.3	1061.4	1059.6	1057.8	1059.6	1061.4	1063.3
140°	1107.1	1106.4	1105.8	1104.7	1103.3	1102.0	1100.6	1099.2	1100.6	1102.0	1103.3
142.5°	1145.5	1144.8	1144.1	1143.1	1141.7	1140.3	1138.9	1137.5	1138.9	1140.3	1141.7
145°	1181.2	1180.7	1180.2	1179.2	1177.6	1176.0	1174.4	1172.7	1174.4	1176.0	1177.6
147.5°	1213.3	1212.8	1212.3	1211.5	1210.4	1209.2	1208.1	1206.9	1208.1	1209.2	1210.4
150°	1242.3	1241.8	1241.4	1240.8	1240.1	1239.4	1238.7	1238.0	1238.7	1239.4	1240.1
152.5°	1267.6	1267.4	1267.1	1266.9	1266.7	1266.4	1266.2	1266.0	1266.2	1266.4	1266.7
155°	1290.4	1290.2	1289.9	1290.0	1290.5	1291.0	1291.4	1291.9	1291.4	1291.0	1290.5
157.5°	1312.0	1312.3	1312.5	1312.6	1312.6	1312.6	1312.6	1312.6	1312.6	1312.6	1312.6
160°	1329.6	1329.9	1330.1	1330.3	1330.6	1330.8	1331.0	1331.3	1331.0	1330.8	1330.6
162.5°	1345.2	1345.4	1345.6	1346.1	1346.8	1347.5	1348.2	1348.9	1348.2	1347.5	1346.8
165°	1358.7	1358.9	1359.1	1359.6	1360.3	1361.0	1361.6	1362.3	1361.6	1361.0	1360.3
167.5°	1369.6	1369.6	1369.6	1370.0	1371.0	1371.9	1372.8	1373.7	1372.8	1371.9	1371.0
170°	1378.9	1378.9	1378.9	1379.4	1380.3	1381.2	1382.1	1383.1	1382.1	1381.2	1380.3
172.5°	1384.7	1384.4	1384.2	1384.7	1385.8	1387.0	1388.1	1389.3	1388.1	1387.0	1385.8
175°	1389.8	1389.6	1389.4	1389.8	1391.0	1392.2	1393.3	1394.5	1393.3	1392.2	1391.0
177.5°	1391.9	1391.7	1391.5	1391.9	1393.1	1394.2	1395.4	1396.5	1395.4	1394.2	1393.1
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5



TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4	1967.4
2.5°	1888.0	1870.2	1852.4	1838.7	1825.0	1801.7	1778.4	1773.0	1767.5	1759.7	1752.0
5°	1790.3	1746.5	1702.7	1663.4	1624.2	1593.6	1563.0	1542.9	1522.8	1508.2	1493.6
7.5°	1676.2	1610.5	1544.7	1498.2	1451.6	1407.3	1363.0	1348.9	1334.7	1315.6	1296.4
10°	1565.7	1493.1	1420.6	1359.9	1299.1	1255.8	1212.4	1195.1	1177.7	1153.5	1129.3
12.5°	1467.1	1387.7	1308.3	1247.1	1185.9	1143.9	1101.9	1076.8	1051.7	1038.0	1024.3
15°	1364.0	1279.1	1194.2	1137.5	1080.9	1043.1	1005.2	983.3	961.3	948.1	934.9
17.5°	1272.7	1188.7	1104.7	1050.4	996.0	961.3	926.7	907.5	888.3	878.3	868.2
20°	1185.9	1103.8	1021.6	968.7	915.7	887.4	859.1	846.8	834.4	826.2	818.0
22.5°	1106.5	1025.7	944.9	899.7	854.5	831.7	808.9	800.2	791.5	784.7	777.8
25°	1027.1	955.0	882.8	844.5	806.1	787.4	768.7	760.0	751.4	744.5	737.7
27.5°	962.3	893.3	824.4	791.5	758.7	744.1	729.5	722.6	715.8	709.4	703.0
30°	899.3	837.6	776.0	747.7	719.4	706.2	692.9	686.1	679.2	673.3	667.4
32.5°	840.8	787.9	734.9	708.9	682.9	671.9	661.0	652.8	644.5	640.0	635.4
35°	785.1	737.7	690.2	668.7	647.3	636.3	625.4	618.5	611.7	608.0	604.4
37.5°	737.7	695.2	652.8	632.2	611.7	601.2	590.7	584.8	578.8	577.4	576.1
40°	689.3	652.8	616.2	596.2	576.1	566.9	557.8	554.2	550.5	549.6	548.7
42.5°	649.1	613.5	577.9	559.6	541.4	533.6	525.9	524.0	522.2	523.6	525.0
45°	602.6	572.9	543.2	526.3	509.4	503.0	496.7	495.3	493.9	496.7	499.4
47.5°	563.3	535.9	508.5	492.5	476.6	472.0	467.4	467.0	466.5	470.2	473.8
50°	523.1	496.7	470.2	457.4	444.6	440.5	436.4	437.8	439.1	445.1	451.0
52.5°	485.7	461.0	436.4	424.5	412.7	409.9	407.2	410.4	413.6	420.0	426.4
55°	444.6	422.2	399.9	390.7	381.6	378.9	376.1	382.5	388.9	394.9	400.8
57.5°	405.4	385.7	366.1	357.9	349.7	349.2	348.8	354.7	360.6	367.0	373.4
60°	363.4	346.9	330.5	324.1	317.7	318.6	319.5	326.4	333.2	338.3	343.3
62.5°	325.0	311.3	297.6	291.7	285.8	288.0	290.3	297.2	304.0	309.9	315.9
65°	286.7	275.3	263.8	259.7	255.6	258.8	262.0	268.0	273.9	278.0	282.1
67.5°	250.2	240.6	231.0	227.8	224.6	227.8	231.0	236.9	242.8	247.0	251.1
70°	211.8	204.0	196.3	194.0	191.7	195.4	199.0	204.0	209.1	213.2	217.3
72.5°	176.2	170.3	164.3	163.9	163.4	166.6	169.8	174.8	179.9	182.6	185.3
75°	141.5	138.3	135.1	134.7	134.2	137.4	140.6	143.3	146.1	148.4	150.6
77.5°	110.5	107.7	105.0	105.4	105.9	108.2	110.5	113.2	115.9	117.3	118.7
80°	78.5	77.6	76.7	77.6	78.5	80.3	82.2	84.0	85.8	86.7	87.6
82.5°	53.9	53.0	52.0	53.4	54.8	56.1	57.5	58.9	60.3	60.7	61.2
85°	31.0	32.4	33.8	33.8	33.8	34.2	34.7	35.1	35.6	35.1	34.7
87.5°	14.6	15.1	15.5	15.5	15.5	16.0	16.4	16.4	16.4	16.0	15.5
90°	10.2	12.9	15.9	18.9	21.9	24.9	25.8	26.7	27.6	28.5	29.2
92.5°	18.3	18.6	20.7	22.8	24.9	26.9	28.5	30.2	31.8	33.4	34.3
95°	25.4	22.0	24.5	27.1	29.6	32.1	33.7	35.3	37.0	38.6	39.4
97.5°	89.2	80.1	68.4	56.6	44.9	33.2	35.0	36.8	38.7	40.5	41.6
100°	193.5	177.8	141.9	106.0	70.1	34.2	36.0	37.9	39.7	41.6	42.6
102.5°	255.4	236.9	196.8	156.8	116.7	76.7	69.1	61.5	53.9	46.3	42.7
105°	318.9	309.8	289.0	268.3	247.6	226.9	186.1	145.4	104.6	63.9	43.7
107.5°	386.4	389.2	392.6	396.1	399.5	403.0	367.5	332.1	296.6	261.2	228.4
110°	454.9	457.1	459.6	462.2	464.7	467.2	459.6	452.0	444.4	436.8	416.6



TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	520.3	522.4	524.9	527.4	530.0	532.5	534.6	536.6	538.7	540.8	541.6
115°	584.6	586.4	588.4	590.5	592.6	594.7	597.0	599.3	601.6	603.9	605.5
117.5°	649.8	651.2	652.3	653.5	654.6	655.8	657.6	659.5	661.3	663.2	664.2
120°	710.7	712.1	712.8	713.5	714.1	714.8	716.7	718.5	720.4	722.2	723.1
122.5°	768.9	770.2	771.1	772.0	773.0	773.9	775.0	776.2	777.3	778.5	779.2
125°	823.7	825.1	826.0	827.0	827.9	828.8	829.3	829.7	830.2	830.6	831.1
127.5°	877.6	879.1	880.3	881.4	882.6	883.7	884.4	885.1	885.8	886.5	886.6
130°	927.3	928.7	929.6	930.6	931.5	932.4	933.3	934.2	935.2	936.1	936.3
132.5°	975.0	976.3	976.9	977.6	978.3	979.0	979.9	980.9	981.8	982.7	982.8
135°	1021.8	1023.0	1023.9	1024.8	1025.8	1026.7	1027.4	1028.1	1028.7	1029.4	1029.4
137.5°	1065.1	1066.3	1066.7	1067.2	1067.7	1068.1	1069.3	1070.4	1071.6	1072.7	1073.1
140°	1104.7	1105.8	1106.4	1107.1	1107.8	1108.5	1109.4	1110.4	1111.3	1112.2	1112.4
142.5°	1143.1	1144.1	1144.8	1145.5	1146.2	1146.8	1147.5	1148.2	1148.9	1149.6	1149.6
145°	1179.2	1180.2	1180.7	1181.2	1181.6	1182.1	1182.5	1183.0	1183.5	1183.9	1184.1
147.5°	1211.5	1212.3	1212.8	1213.3	1213.7	1214.2	1214.7	1215.1	1215.6	1216.0	1215.7
150°	1240.8	1241.4	1241.8	1242.3	1242.7	1243.2	1243.7	1244.1	1244.6	1245.0	1244.9
152.5°	1266.9	1267.1	1267.4	1267.6	1267.8	1268.1	1269.0	1269.9	1270.8	1271.7	1271.6
155°	1290.0	1289.9	1290.2	1290.4	1290.6	1290.9	1292.0	1293.2	1294.3	1295.5	1295.3
157.5°	1312.6	1312.5	1312.3	1312.0	1311.8	1311.6	1313.0	1314.3	1315.7	1317.1	1316.9
160°	1330.3	1330.1	1329.9	1329.6	1329.4	1329.2	1330.6	1331.9	1333.3	1334.7	1334.6
162.5°	1346.1	1345.6	1345.4	1345.2	1345.0	1344.7	1346.3	1347.9	1349.6	1351.2	1351.3
165°	1359.6	1359.1	1358.9	1358.7	1358.4	1358.2	1360.0	1361.9	1363.7	1365.6	1365.7
167.5°	1370.0	1369.6	1369.6	1369.6	1369.6	1369.6	1371.4	1373.3	1375.1	1377.0	1377.0
170°	1379.4	1378.9	1378.9	1378.9	1378.9	1378.9	1380.8	1382.6	1384.4	1386.3	1386.3
172.5°	1384.7	1384.2	1384.4	1384.7	1384.9	1385.1	1387.0	1388.8	1390.7	1392.5	1392.4
175°	1389.8	1389.4	1389.6	1389.8	1390.1	1390.3	1391.9	1393.5	1395.1	1396.8	1396.6
177.5°	1391.9	1391.5	1391.7	1391.9	1392.2	1392.4	1394.2	1396.1	1397.9	1399.7	1399.5
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5



TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	1967.4	1967.4	1967.4	1967.4
2.5°	1748.8	1745.6	1732.8	1720.0
5°	1482.6	1471.7	1468.0	1464.4
7.5°	1295.5	1294.6	1275.4	1256.2
10°	1130.7	1132.1	1114.7	1097.4
12.5°	1012.9	1001.5	1000.1	998.8
15°	924.4	913.9	912.0	910.2
17.5°	861.8	855.4	853.6	851.8
20°	814.4	810.7	807.5	804.3
22.5°	773.3	768.7	766.0	763.2
25°	733.6	729.5	728.5	727.6
27.5°	698.0	692.9	692.9	692.9
30°	664.2	661.0	659.6	658.2
32.5°	632.7	629.9	629.9	629.9
35°	603.0	601.6	599.8	598.0
37.5°	576.1	576.1	575.2	574.3
40°	550.1	551.4	551.4	551.4
42.5°	526.3	527.7	527.7	527.7
45°	501.7	504.0	504.9	505.8
47.5°	477.5	481.1	482.0	483.0
50°	453.7	456.5	456.9	457.4
52.5°	429.5	432.7	435.0	437.3
55°	404.0	407.2	408.5	409.9
57.5°	376.6	379.8	380.2	380.7
60°	346.5	349.7	350.6	351.5
62.5°	317.7	319.5	320.4	321.4
65°	284.8	287.6	289.4	291.2
67.5°	253.3	255.6	255.6	255.6
70°	218.2	219.1	220.5	221.8
72.5°	185.8	186.2	186.2	186.2
75°	151.6	152.5	152.9	153.4
77.5°	119.1	119.6	119.6	119.6
80°	87.2	86.7	86.7	86.7
82.5°	59.8	58.4	58.4	58.4
85°	34.2	33.8	34.2	34.7
87.5°	15.5	15.5	15.5	15.5
90°	29.7	30.2	30.6	31.1
92.5°	34.5	34.8	35.0	35.2
95°	39.4	39.4	39.4	39.4
97.5°	41.8	42.0	42.2	42.5
100°	42.8	43.1	43.3	43.5
102.5°	43.2	43.6	44.1	44.5
105°	44.2	44.7	45.1	45.6
107.5°	198.2	168.1	137.9	107.7
110°	383.7	350.7	317.8	284.9



TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	541.1	540.7	540.2	539.8
115°	606.4	607.3	608.2	609.2
117.5°	664.4	664.7	664.9	665.1
120°	723.1	723.1	723.1	723.1
122.5°	779.4	779.6	779.9	780.1
125°	831.6	832.0	832.5	832.9
127.5°	886.1	885.7	885.2	884.7
130°	935.9	935.4	934.9	934.5
132.5°	982.1	981.4	980.7	980.1
135°	1028.7	1028.1	1027.4	1026.7
137.5°	1072.6	1072.1	1071.7	1071.2
140°	1112.0	1111.5	1111.1	1110.6
142.5°	1148.9	1148.2	1147.5	1146.8
145°	1184.1	1184.1	1184.1	1184.1
147.5°	1214.5	1213.4	1212.2	1211.1
150°	1244.2	1243.5	1242.9	1242.2
152.5°	1270.5	1269.3	1268.2	1267.0
155°	1294.0	1292.6	1291.2	1289.8
157.5°	1315.0	1313.2	1311.3	1309.5
160°	1333.0	1331.4	1329.8	1328.1
162.5°	1349.9	1348.5	1347.1	1345.8
165°	1364.1	1362.5	1360.8	1359.2
167.5°	1375.1	1373.3	1371.4	1369.6
170°	1384.4	1382.6	1380.8	1378.9
172.5°	1390.3	1388.2	1386.2	1384.1
175°	1394.8	1393.0	1391.1	1389.3
177.5°	1397.2	1394.9	1392.6	1390.3
180°	1394.5	1394.5	1394.5	1394.5



TEST NUMBER: P831633

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-G

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.45	14.22	14.47	15.25	16.62	15.69	16.46	16.71	17.48	18.86
	3H	15.09	15.78	16.13	16.82	18.21	17.10	17.79	18.14	18.83	20.23
	4H	15.66	16.32	16.71	17.36	18.76	17.55	18.20	18.60	19.24	20.64
	6H	16.03	16.63	17.09	17.67	19.09	17.82	18.42	18.88	19.47	20.88
	8H	16.12	16.69	17.18	17.75	19.16	17.88	18.45	18.94	19.51	20.92
	12H	16.17	16.71	17.23	17.76	19.19	17.90	18.44	18.96	19.49	20.93
4H	2H	14.01	14.67	15.07	15.71	17.11	15.84	16.49	16.89	17.53	18.93
	3H	15.84	16.38	16.90	17.45	18.86	17.45	17.99	18.51	19.06	20.48
	4H	16.53	17.03	17.60	18.09	19.52	18.03	18.53	19.10	19.59	21.02
	6H	17.00	17.43	18.08	18.51	19.94	18.43	18.86	19.51	19.94	21.37
	8H	17.14	17.53	18.21	18.61	20.05	18.54	18.94	19.62	20.01	21.46
	12H	17.20	17.56	18.29	18.65	20.10	18.58	18.94	19.67	20.03	21.48
8H	4H	16.79	17.19	17.86	18.26	19.71	18.13	18.53	19.21	19.60	21.05
	6H	17.37	17.70	18.47	18.82	20.26	18.63	18.96	19.73	20.07	21.52
	8H	17.58	17.87	18.69	18.97	20.43	18.81	19.10	19.91	20.19	21.66
	12H	17.70	17.95	18.81	19.05	20.55	18.91	19.16	20.01	20.25	21.76
12H	4H	16.79	17.15	17.88	18.23	19.69	18.10	18.46	19.19	19.55	21.00
	6H	17.42	17.71	18.53	18.81	20.28	18.64	18.93	19.75	20.03	21.49
	8H	17.66	17.91	18.76	19.00	20.51	18.84	19.09	19.95	20.18	21.69