

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332359-940

Luminaire Tested: **S123RDIP-S1000D1195U940-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332359-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1000D1195U940-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1195 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7235.1 lumens
Efficiency: N/A
Efficacy: 110.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332359-940

CATALOG NUMBER: S123RDIP-S1000D1195U940-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

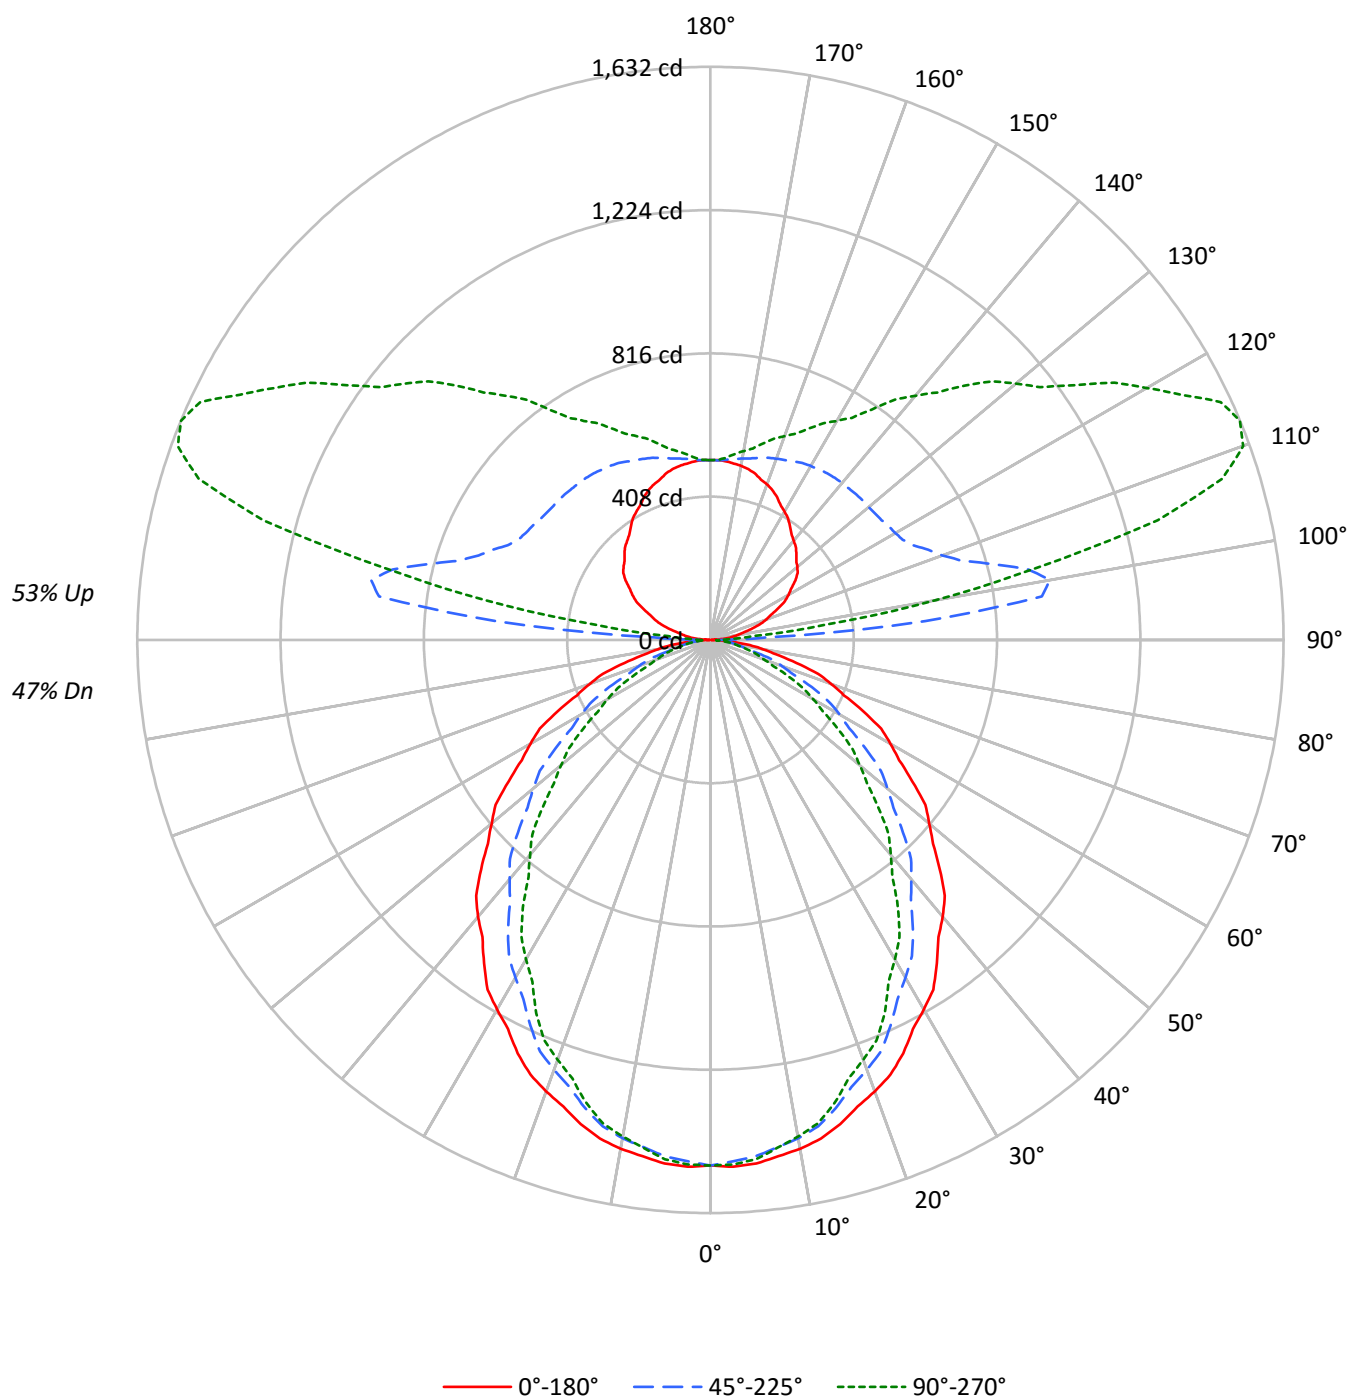

TEST NUMBER: P332359-940

CATALOG NUMBER: S123RDIP-S1000D1195U940-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	106	106	106	106	98	98	98	98	82	82	82		67	67	67		53
1	97	93	89	86	89	86	83	80	72	70	68		59	58	56		47
2	89	82	76	71	81	75	70	66	63	60	56		52	50	47		42
3	81	72	65	59	74	67	60	55	56	52	48		46	43	40		38
4	74	64	56	50	68	59	52	47	50	45	41		42	38	35		34
5	68	57	49	43	63	53	46	41	45	40	35		37	33	30		31
6	63	51	43	38	58	48	41	35	41	35	31		34	30	27		28
7	58	46	39	33	54	43	36	31	37	31	27		31	27	24		25
8	54	42	34	29	50	39	32	28	34	28	24		28	24	21		23
9	50	38	31	26	46	36	29	25	31	26	22		26	22	19		22
10	47	35	28	23	43	33	27	22	28	23	20		24	20	17		20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16108	16108	16108
5°	16170	15946	16038
10°	16078	15746	15692
15°	15905	15377	15216
20°	15668	14917	14569
25°	15423	14400	13938
30°	15100	13803	13048
35°	14767	13205	12232
40°	14462	12500	11221
45°	14059	11805	10310
50°	13618	11015	9287
55°	13165	10113	8336
60°	12751	9145	7289
65°	12210	8099	6243
70°	11534	6801	5042
75°	10551	5352	4741
80°	9403	4736	4364
85°	7941	4199	3903

TEST NUMBER: P332359-940

CATALOG NUMBER: S123RDIP-S1000D1195U940-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.5	1.9
10°-20°	391.0	5.4
20°-30°	563.0	7.8
30°-40°	634.1	8.8
40°-50°	606.7	8.4
50°-60°	496.8	6.9
60°-70°	335.2	4.6
70°-80°	168.6	2.3
80°-90°	48.6	0.7
90°-100°	284.8	3.9
100°-110°	806.5	11.1
110°-120°	793.4	11.0
120°-130°	632.8	8.7
130°-140°	498.9	6.9
140°-150°	372.4	5.1
150°-160°	259.6	3.6
160°-170°	152.5	2.1
170°-180°	49.6	0.7
0°-30°	1094.5	15.1
0°-40°	1728.6	23.9
0°-60°	2832.1	39.1
0°-90°	3384.6	46.8
90°-120°	1884.7	26.0
90°-150°	3388.9	46.8
90°-180°	3851.0	53.2
0°-180°	7235.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1496	1496	1496	1496	1496	
5°	1496	1490	1476	1486	1484	142
15°	1427	1413	1380	1374	1365	402
25°	1299	1267	1212	1188	1174	597
35°	1124	1078	1005	954	931	703
45°	924	867	776	709	677	712
55°	702	640	539	471	444	629
65°	479	411	318	261	245	474
75°	254	195	129	117	114	270
85°	64	39	34	32	32	72
90°	2	12	26	29	30	6
95°	35	114	614	179	120	38
105°	120	178	833	1457	1318	128
115°	212	265	637	1397	1603	210
125°	295	349	595	1077	1264	262
135°	346	413	586	887	1025	267
145°	395	452	579	728	801	247
155°	449	484	560	637	664	206
165°	490	504	537	569	579	138
175°	511	511	515	522	521	48
180°	512	512	512	512	512	

TEST NUMBER: P332359-940

CATALOG NUMBER: S123RDIP-S1000D1195U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5
2.5°	1501.3	1500.4	1499.6	1498.7	1497.8	1496.1	1493.5	1490.9	1488.4	1485.8	1488.1
5°	1496.5	1495.0	1493.7	1492.4	1491.0	1488.7	1485.5	1482.3	1479.1	1475.8	1478.2
7.5°	1482.6	1481.1	1479.7	1478.2	1476.8	1473.9	1469.7	1465.5	1461.3	1457.1	1458.5
10°	1471.0	1469.1	1467.1	1465.3	1463.4	1460.0	1455.2	1450.3	1445.5	1440.6	1440.9
12.5°	1454.5	1452.3	1450.3	1448.1	1446.0	1442.0	1436.1	1430.1	1424.2	1418.3	1418.1
15°	1427.3	1424.3	1421.3	1418.4	1415.4	1410.2	1402.6	1395.0	1387.5	1379.9	1378.6
17.5°	1393.0	1389.6	1386.2	1382.7	1379.2	1372.7	1363.1	1353.5	1343.9	1334.3	1331.4
20°	1367.8	1363.5	1359.1	1354.9	1350.5	1343.3	1333.0	1322.8	1312.5	1302.3	1298.8
22.5°	1339.6	1334.7	1329.7	1324.7	1319.8	1311.9	1300.9	1290.0	1279.2	1268.3	1263.9
25°	1298.6	1291.9	1285.1	1278.4	1271.7	1262.0	1249.6	1237.2	1224.9	1212.5	1206.8
27.5°	1248.8	1241.4	1233.9	1226.5	1219.1	1208.4	1194.6	1180.8	1167.0	1153.2	1145.3
30°	1214.9	1206.8	1198.7	1190.6	1182.5	1170.9	1155.8	1140.7	1125.6	1110.5	1101.4
32.5°	1180.9	1171.7	1162.5	1153.3	1144.2	1131.7	1115.7	1099.7	1083.7	1067.7	1057.7
35°	1123.8	1114.1	1104.4	1094.8	1085.0	1071.7	1055.1	1038.3	1021.6	1004.9	993.3
37.5°	1066.0	1055.3	1044.5	1033.7	1022.9	1008.6	990.8	972.9	955.0	937.2	924.0
40°	1029.2	1017.4	1005.4	993.5	981.7	966.2	947.1	927.9	908.7	889.6	875.6
42.5°	987.4	975.5	963.7	951.8	940.0	924.2	904.4	884.6	864.8	845.0	829.6
45°	923.6	911.4	899.3	887.2	875.0	858.6	837.9	817.1	796.3	775.5	760.2
47.5°	859.8	846.4	833.1	819.7	806.5	789.4	768.7	747.9	727.1	706.3	689.6
50°	813.2	800.5	787.8	775.2	762.4	745.2	723.4	701.5	679.7	657.8	641.1
52.5°	771.4	757.7	743.9	730.1	716.4	698.7	677.1	655.4	633.8	612.2	594.8
55°	701.5	688.3	675.0	661.8	648.6	630.5	607.6	584.7	561.8	538.9	523.3
57.5°	636.9	622.5	608.1	593.7	579.3	560.6	537.5	514.5	491.5	468.5	453.7
60°	592.3	577.5	562.6	547.8	532.9	514.3	492.0	469.6	447.2	424.8	410.2
62.5°	547.6	532.8	517.9	503.1	488.3	469.7	447.3	424.9	402.5	380.1	366.4
65°	479.4	464.6	449.7	434.9	420.1	402.2	381.1	360.1	339.0	318.0	304.8
67.5°	411.2	396.2	381.2	366.2	351.2	333.6	313.4	293.3	273.1	252.9	243.1
70°	366.5	352.0	337.4	322.8	308.3	291.6	272.7	253.8	234.9	216.1	206.6
72.5°	321.8	307.6	293.2	278.8	264.5	248.7	231.6	214.5	197.2	180.1	172.4
75°	253.7	240.7	227.7	214.8	201.9	188.0	173.2	158.3	143.5	128.7	125.9
77.5°	191.5	179.8	168.1	156.4	144.7	134.0	124.5	114.9	105.4	95.9	94.4
80°	151.7	140.6	129.6	118.5	107.5	99.2	93.5	87.7	82.1	76.4	75.6
82.5°	113.9	104.3	94.8	85.2	75.6	69.6	66.9	64.3	61.6	58.9	58.1
85°	64.3	58.4	52.4	46.5	40.6	37.2	36.4	35.6	34.8	34.0	33.4
87.5°	23.7	21.8	19.8	18.0	16.1	15.3	16.0	16.6	17.2	17.8	17.4
90°	2.1	4.1	6.2	9.4	11.4	13.5	16.6	19.7	22.8	25.9	24.9
92.5°	12.8	19.1	27.7	35.8	44.6	59.9	87.0	131.6	175.3	159.3	120.2
95°	35.2	38.3	49.8	67.3	94.3	134.6	222.7	377.1	547.1	614.4	498.3
97.5°	60.1	61.1	70.0	85.3	111.9	155.6	239.8	413.8	697.1	952.1	1018.6
100°	76.7	77.7	85.0	99.4	124.3	164.7	237.3	390.6	663.1	981.1	1185.3
102.5°	94.1	95.9	102.4	116.0	138.4	175.5	240.6	370.7	613.3	927.3	1193.5
105°	120.2	123.3	129.5	142.0	161.6	193.8	249.7	356.4	552.2	832.9	1130.3
107.5°	147.9	151.1	157.0	169.2	187.7	217.6	266.7	355.3	513.3	749.7	1019.7
110°	167.8	170.9	176.1	187.5	205.1	234.2	280.8	359.5	498.3	702.4	950.0

TEST NUMBER: P332359-940

CATALOG NUMBER: S123RDIP-S1000D1195U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	186.1	189.2	194.4	205.7	223.4	251.6	294.9	367.8	490.1	670.9	889.6
115°	212.4	216.5	222.7	233.1	250.7	278.7	318.1	381.3	487.0	637.1	816.4
117.5°	238.7	243.4	248.6	258.2	277.9	303.8	342.7	399.0	488.8	617.2	772.2
120°	256.9	260.0	265.2	275.6	295.2	321.2	358.5	412.3	492.1	608.1	749.0
122.5°	272.7	275.8	281.0	292.1	311.0	338.6	375.1	424.8	497.9	602.4	730.0
125°	295.2	297.4	303.5	315.0	334.7	362.6	398.9	444.4	506.6	594.7	705.5
127.5°	312.5	315.6	323.2	334.8	356.6	384.6	419.5	460.7	516.6	590.9	684.0
130°	323.2	326.4	335.6	348.1	369.9	397.8	432.0	471.4	523.2	588.4	672.3
132.5°	331.5	335.5	345.6	360.5	382.3	409.5	442.8	481.3	528.2	587.6	661.6
135°	346.1	350.2	361.6	377.1	398.9	426.9	459.0	494.2	535.7	586.4	647.6
137.5°	359.7	364.1	375.2	391.8	413.4	439.3	470.1	503.7	540.6	584.1	635.3
140°	368.8	374.0	384.3	400.9	421.7	447.5	477.6	508.7	543.9	583.3	627.9
142.5°	378.8	383.2	394.3	409.2	430.0	454.2	483.4	513.6	546.4	581.7	621.2
145°	394.8	397.8	407.2	422.7	440.3	464.1	491.1	519.1	548.0	579.2	612.3
147.5°	410.9	412.8	421.9	435.3	452.4	472.6	497.3	522.4	548.0	575.2	603.6
150°	421.7	422.7	431.0	444.4	459.0	477.6	501.4	523.2	548.0	571.9	597.8
152.5°	432.5	432.7	441.0	452.7	465.6	483.4	503.9	524.9	545.5	567.8	591.2
155°	448.6	448.6	454.9	465.2	476.5	491.1	508.7	525.3	542.9	560.5	581.2
157.5°	461.5	462.3	467.3	476.4	486.1	497.3	511.4	526.3	539.4	554.1	570.0
160°	471.4	471.4	475.5	483.8	491.1	501.4	513.9	526.3	537.7	549.1	562.6
162.5°	478.8	478.8	482.1	488.8	495.3	503.9	514.7	525.5	534.4	544.1	555.1
165°	490.1	489.0	491.1	496.2	500.4	507.7	515.9	523.2	529.4	536.6	544.9
167.5°	498.6	497.3	498.3	502.3	505.2	509.7	515.8	521.6	524.4	529.2	535.2
170°	503.5	501.4	502.5	505.6	507.7	509.7	514.9	519.1	521.1	524.2	529.4
172.5°	506.8	505.6	505.8	508.1	509.3	510.6	514.9	518.3	518.6	520.0	523.6
175°	510.8	509.7	508.7	510.8	510.8	511.8	513.9	515.9	514.9	514.9	517.0
177.5°	512.6	511.8	511.0	511.8	511.8	511.8	512.6	514.2	512.6	511.8	512.6
180°	511.8	511.8	511.8	511.8	511.8	511.8	511.8	511.8	511.8	511.8	511.8

TEST NUMBER: P332359-940

CATALOG NUMBER: S123RDIP-S1000D1195U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5
2.5°	1490.5	1492.9	1495.2	1496.2	1495.8	1495.4	1495.0	1494.5
5°	1480.7	1483.1	1485.5	1486.5	1485.9	1485.4	1484.9	1484.3
7.5°	1459.8	1461.2	1462.5	1462.8	1461.8	1460.9	1460.0	1459.0
10°	1441.2	1441.5	1441.7	1441.2	1439.8	1438.4	1437.1	1435.7
12.5°	1417.9	1417.8	1417.6	1416.8	1415.2	1413.6	1412.1	1410.5
15°	1377.2	1375.9	1374.6	1372.9	1371.0	1369.1	1367.3	1365.4
17.5°	1328.6	1325.7	1322.9	1320.0	1317.2	1314.4	1311.6	1308.8
20°	1295.2	1291.7	1288.3	1284.9	1281.7	1278.4	1275.1	1271.9
22.5°	1259.5	1255.2	1250.8	1247.1	1244.1	1241.1	1238.1	1235.0
25°	1201.1	1195.4	1189.8	1185.4	1182.5	1179.6	1176.6	1173.6
27.5°	1137.5	1129.6	1121.7	1115.5	1111.0	1106.4	1101.9	1097.4
30°	1092.2	1083.0	1073.8	1067.1	1062.7	1058.5	1054.1	1049.8
32.5°	1047.7	1037.7	1027.6	1020.4	1015.8	1011.3	1006.7	1002.2
35°	981.7	970.1	958.5	950.3	945.5	940.6	935.8	930.9
37.5°	910.9	897.7	884.6	874.9	869.0	863.0	857.0	851.0
40°	861.6	847.6	833.5	823.4	817.2	811.0	804.8	798.6
42.5°	814.3	799.0	783.6	773.2	767.7	762.1	756.5	751.0
45°	744.8	729.4	714.0	703.1	696.6	690.2	683.7	677.3
47.5°	672.9	656.2	639.4	628.2	622.4	616.7	610.9	605.1
50°	624.4	607.6	590.9	579.4	573.3	567.0	560.9	554.6
52.5°	577.5	560.1	542.7	531.2	525.7	520.1	514.6	509.0
55°	507.6	492.0	476.3	465.7	460.4	455.0	449.6	444.2
57.5°	438.9	424.1	409.4	399.7	395.1	390.5	385.9	381.3
60°	395.7	381.1	366.5	357.0	352.4	347.8	343.2	338.6
62.5°	352.7	339.0	325.3	316.0	311.3	306.5	301.7	296.9
65°	291.6	278.3	265.1	257.0	254.0	251.1	248.2	245.1
67.5°	233.2	223.3	213.5	206.9	203.8	200.5	197.3	194.2
70°	197.2	187.7	178.3	172.1	169.1	166.1	163.2	160.2
72.5°	164.7	156.9	149.3	144.8	143.6	142.3	141.1	139.8
75°	123.2	120.6	117.9	116.3	115.7	115.1	114.6	114.0
77.5°	93.0	91.5	90.1	89.1	88.5	88.0	87.5	86.9
80°	74.8	74.0	73.2	72.6	72.1	71.5	70.9	70.4
82.5°	57.3	56.5	55.7	55.3	55.2	55.1	54.9	54.8
85°	32.9	32.4	31.8	31.6	31.6	31.6	31.6	31.6
87.5°	17.4	17.4	17.4	17.6	17.1	17.1	17.1	16.7
90°	25.9	26.9	28.0	30.1	29.0	30.1	31.1	30.1
92.5°	87.2	69.2	61.1	55.7	53.9	50.7	51.8	49.9
95°	373.0	252.8	197.9	160.6	140.9	131.6	124.3	120.2
97.5°	929.7	744.7	611.1	487.1	410.7	364.1	336.1	327.2
100°	1221.5	1137.6	1016.4	869.2	764.6	688.9	648.5	649.6
102.5°	1318.5	1315.7	1245.1	1151.8	1070.4	1010.6	976.8	953.0
105°	1346.8	1450.5	1470.2	1443.2	1395.5	1356.2	1323.0	1317.9
107.5°	1265.2	1433.4	1524.2	1561.1	1561.9	1548.6	1537.5	1527.9
110°	1187.3	1378.0	1508.5	1581.0	1610.0	1618.3	1616.2	1614.2

TEST NUMBER: P332359-940

CATALOG NUMBER: S123RDIP-S1000D1195U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1110.2	1305.0	1451.3	1544.5	1597.6	1623.3	1631.1	1631.6
115°	1008.1	1188.3	1340.6	1453.6	1531.2	1576.8	1597.6	1602.8
117.5°	934.1	1089.7	1226.5	1341.0	1422.1	1474.3	1504.1	1511.2
120°	895.1	1035.0	1159.3	1264.0	1345.8	1403.8	1428.7	1434.9
122.5°	864.4	991.0	1106.3	1203.5	1276.2	1328.4	1355.8	1363.6
125°	823.7	936.6	1036.0	1118.9	1185.3	1230.8	1256.7	1264.0
127.5°	788.0	888.7	978.4	1053.8	1112.9	1151.8	1175.3	1181.9
130°	765.6	858.9	942.8	1013.3	1068.2	1105.5	1127.2	1135.5
132.5°	744.9	830.7	908.8	976.0	1027.5	1064.8	1084.1	1089.9
135°	716.9	790.5	857.8	916.9	967.7	998.7	1017.4	1024.7
137.5°	691.4	751.7	809.8	860.9	903.7	935.1	950.8	955.6
140°	676.5	729.3	779.1	823.7	863.0	892.1	908.6	907.6
142.5°	662.5	707.8	750.9	789.7	823.2	848.9	863.8	862.8
145°	645.4	679.7	712.8	742.8	768.7	790.5	798.8	800.8
147.5°	631.6	658.7	685.5	706.8	726.5	741.2	749.0	749.8
150°	621.6	645.4	667.2	686.9	702.4	713.8	720.1	720.1
152.5°	612.5	633.0	652.3	668.7	680.9	691.4	695.2	695.2
155°	598.8	615.4	631.0	643.4	652.7	661.0	663.1	664.1
157.5°	584.3	598.2	610.2	619.9	628.0	634.3	635.9	635.7
160°	576.0	587.5	597.8	605.0	612.3	618.5	618.5	617.5
162.5°	566.1	575.9	585.3	591.7	596.6	601.9	601.9	600.9
165°	553.2	559.5	566.7	571.9	576.0	580.1	579.2	579.2
167.5°	542.1	546.8	551.0	554.7	556.5	559.5	558.4	558.4
170°	534.6	537.7	541.8	543.9	544.9	547.1	546.0	546.0
172.5°	528.0	530.2	533.6	534.8	535.0	537.1	535.2	534.4
175°	519.1	520.0	522.2	522.2	522.2	523.2	522.2	521.1
177.5°	513.4	514.2	515.1	515.1	514.2	515.1	513.4	513.4
180°	511.8	511.8	511.8	511.8	511.8	511.8	511.8	511.8

(END OF REPORT)