

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331720-927

Luminaire Tested: **SA2XXRDIP-C865D725U927-4F0-1E-UDD-F**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331720-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C865D725U927-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 725 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4686.0 lumens
Efficiency: N/A
Efficacy: 86.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331720-927

CATALOG NUMBER: SA2XXRDIP-C865D725U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

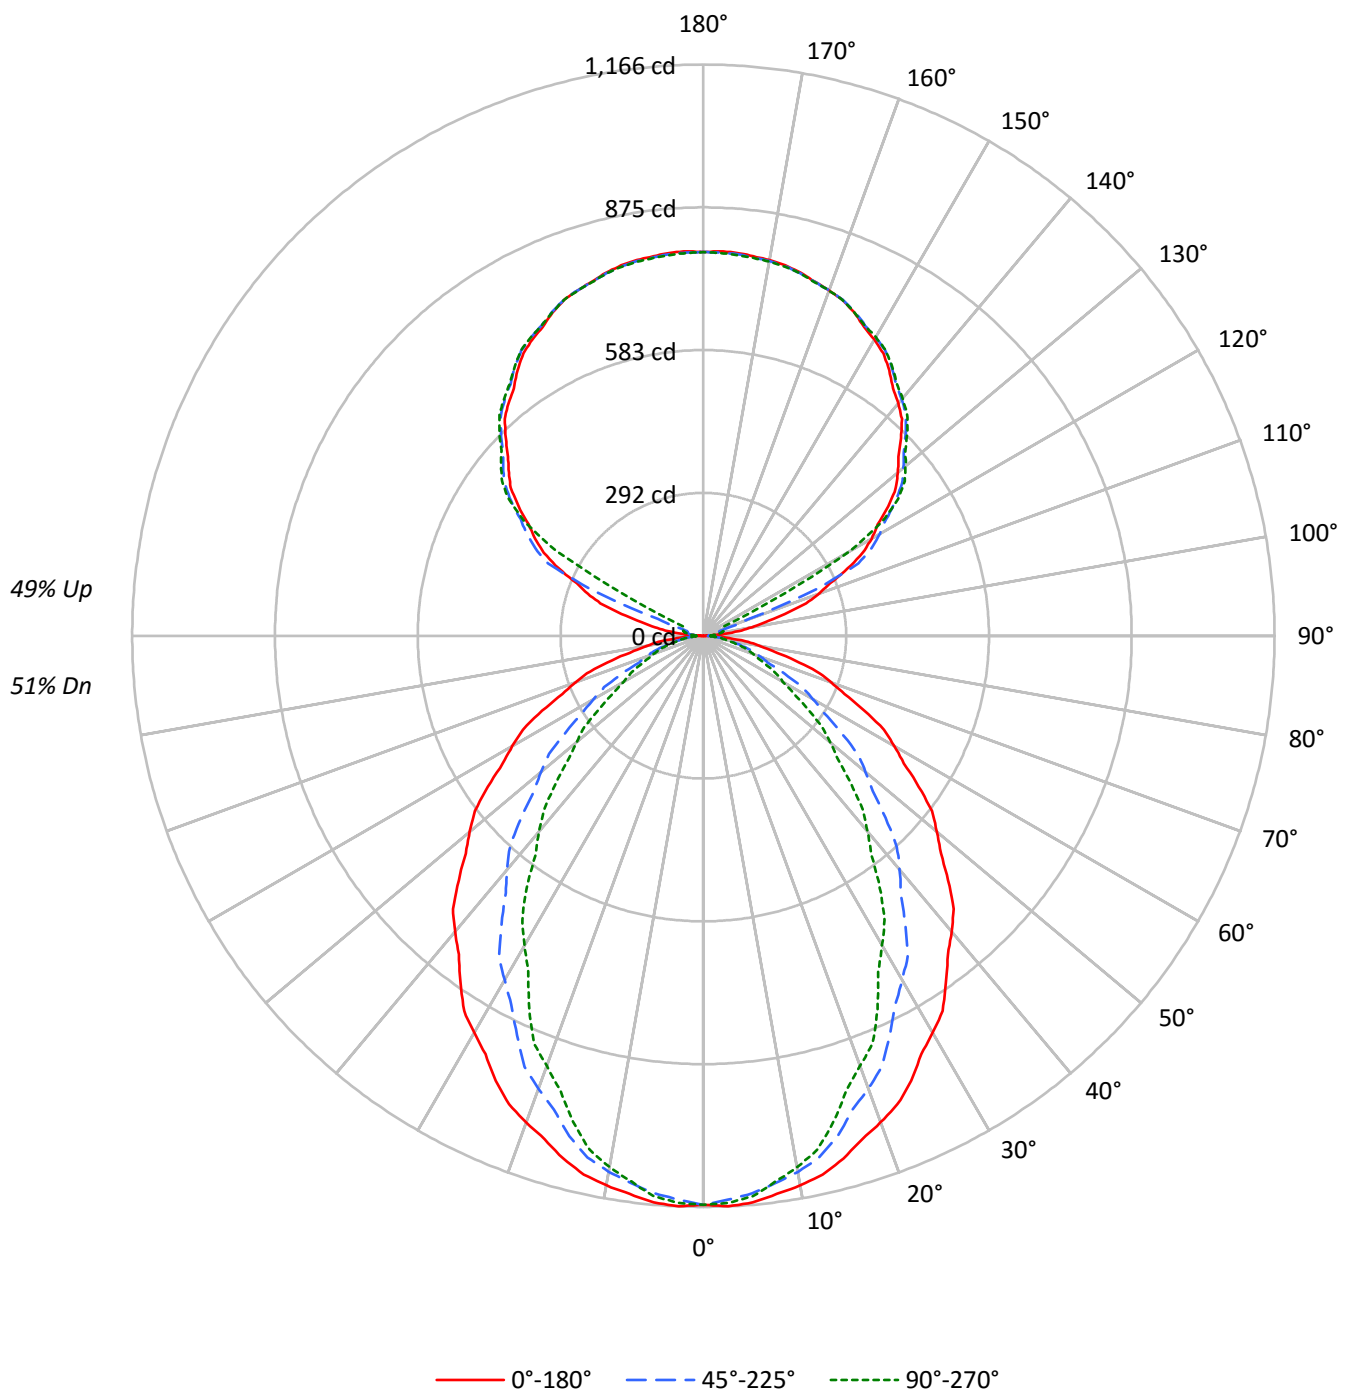

TEST NUMBER: P331720-927

CATALOG NUMBER: SA2XXRDIP-C865D725U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57
1	98	94	91	87	91	87	84	81	74	72	70	62	61	59	51	50	49
2	90	83	77	72	83	77	72	68	66	62	59	55	53	50	46	44	42
3	82	73	66	61	76	68	62	57	58	54	50	49	46	43	41	38	36
4	76	65	58	52	70	61	54	49	52	47	43	44	40	37	37	34	32
5	70	58	50	45	64	54	47	42	47	42	37	40	36	33	33	30	28
6	64	53	45	39	59	49	42	37	42	37	33	36	32	29	31	27	25
7	60	48	40	34	55	45	38	33	39	33	29	33	29	26	28	25	22
8	55	43	36	31	51	41	34	29	35	30	26	30	26	23	26	23	20
9	52	40	32	27	48	37	31	26	33	27	23	28	24	21	24	21	18
10	48	37	29	25	45	34	28	24	30	25	21	26	22	19	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	18755	18755	18755
5°	18827	18519	18621
10°	18682	18216	18061
15°	18467	17677	17167
20°	18170	16905	16057
25°	17865	16030	14982
30°	17443	15129	13601
35°	17030	14152	12390
40°	16617	13139	10989
45°	16130	12001	9720
50°	15631	10854	8475
55°	15122	9619	7279
60°	14528	8315	6042
65°	13857	6988	5501
70°	13053	5755	5061
75°	12071	5246	4722
80°	10646	4695	4305
85°	8373	3705	3705

TEST NUMBER: P331720-927

CATALOG NUMBER: SA2XXRDIP-C865D725U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	108.7	2.3
10°-20°	298.5	6.4
20°-30°	419.2	8.9
30°-40°	457.1	9.8
40°-50°	420.3	9.0
50°-60°	330.1	7.0
60°-70°	215.2	4.6
70°-80°	111.0	2.4
80°-90°	30.7	0.7
90°-100°	26.1	0.6
100°-110°	95.8	2.0
110°-120°	256.1	5.5
120°-130°	422.7	9.0
130°-140°	449.6	9.6
140°-150°	417.8	8.9
150°-160°	335.9	7.2
160°-170°	216.5	4.6
170°-180°	74.5	1.6
0°-30°	826.5	17.6
0°-40°	1283.6	27.4
0°-60°	2034.0	43.4
0°-90°	2391.0	51.0
90°-120°	378.0	8.1
90°-150°	1668.1	35.6
90°-180°	2295.0	49.0
0°-180°	4686.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1162	1162	1162	1162	1162	
5°	1162	1156	1143	1151	1149	110
15°	1105	1092	1058	1038	1027	311
25°	1003	967	900	858	841	461
35°	864	808	718	654	629	541
45°	706	634	526	454	426	545
55°	537	453	342	281	259	480
65°	363	277	183	149	144	359
75°	194	122	84	77	76	205
85°	45	24	20	20	20	53
90°	1	7	11	14	15	4
95°	37	19	22	25	24	45
105°	172	180	34	41	43	184
115°	326	336	350	100	46	321
125°	461	468	479	483	484	411
135°	570	579	584	590	589	440
145°	661	661	670	674	672	413
155°	728	724	730	733	729	335
165°	767	764	766	769	766	217
175°	785	781	782	785	780	75
180°	783	783	783	783	783	

TEST NUMBER: P331720-927

CATALOG NUMBER: SA2XXRDIP-C865D725U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6
2.5°	1165.8	1164.8	1163.9	1162.9	1162.1	1160.5	1158.5	1156.4	1154.4	1152.3	1154.2
5°	1161.6	1160.4	1159.2	1158.0	1156.9	1154.8	1151.8	1148.7	1145.7	1142.6	1144.7
7.5°	1149.5	1148.1	1146.7	1145.3	1143.8	1141.3	1137.7	1134.2	1130.6	1127.0	1127.7
10°	1139.5	1137.8	1136.2	1134.6	1132.9	1129.8	1125.1	1120.5	1115.8	1111.1	1110.4
12.5°	1126.9	1124.8	1122.8	1120.9	1118.8	1114.8	1108.8	1102.9	1096.9	1090.9	1089.6
15°	1104.8	1102.2	1099.6	1097.1	1094.5	1089.3	1081.3	1073.4	1065.4	1057.5	1053.0
17.5°	1077.7	1073.7	1069.8	1065.9	1062.0	1054.9	1044.7	1034.5	1024.4	1014.2	1008.9
20°	1057.5	1052.8	1048.1	1043.5	1038.8	1030.6	1018.9	1007.3	995.6	983.9	978.0
22.5°	1035.6	1030.4	1025.2	1019.9	1014.7	1005.5	992.3	979.1	966.0	952.8	945.2
25°	1002.8	995.4	987.9	980.4	973.0	961.5	946.0	930.7	915.2	899.8	890.3
27.5°	963.3	955.1	947.1	938.9	930.8	918.1	900.6	883.3	865.9	848.5	837.3
30°	935.6	926.7	917.8	908.9	900.1	886.3	867.6	848.9	830.2	811.5	799.6
32.5°	908.6	898.3	887.9	877.5	867.1	852.5	833.4	814.3	795.3	776.2	762.6
35°	864.0	852.2	840.3	828.3	816.4	800.2	779.6	759.1	738.6	718.0	703.2
37.5°	819.5	806.4	793.4	780.2	767.1	749.6	727.8	705.8	684.0	662.0	645.8
40°	788.4	774.4	760.3	746.3	732.3	714.0	691.3	668.7	646.0	623.4	606.7
42.5°	756.5	741.6	726.9	712.2	697.4	678.3	654.9	631.4	608.1	584.6	567.5
45°	706.4	690.7	675.1	659.4	643.8	623.7	599.2	574.6	550.1	525.6	509.0
47.5°	657.6	641.0	624.5	607.8	591.3	570.3	545.0	519.7	494.3	469.1	452.6
50°	622.3	605.7	589.1	572.5	556.0	534.8	509.1	483.4	457.7	432.1	415.9
52.5°	587.8	570.5	553.2	535.8	518.5	497.3	472.1	446.9	421.8	396.7	381.1
55°	537.2	519.0	500.7	482.5	464.3	442.5	417.3	392.1	366.9	341.7	327.6
57.5°	485.2	466.5	447.8	429.1	410.5	389.0	364.7	340.5	316.2	292.0	279.2
60°	449.9	431.2	412.6	393.9	375.2	353.8	329.7	305.6	281.6	257.5	245.7
62.5°	415.4	396.7	378.0	359.3	340.6	319.9	296.9	274.0	251.0	228.1	216.7
65°	362.7	343.7	324.8	305.9	287.0	267.0	246.0	225.0	203.9	182.9	175.0
67.5°	311.8	293.0	274.3	255.4	236.6	217.8	198.9	180.0	161.1	142.1	138.5
70°	276.5	258.3	240.0	221.8	203.6	186.4	170.3	154.2	138.1	121.9	119.6
72.5°	242.8	225.4	207.9	190.4	172.9	157.7	144.8	131.8	118.9	106.0	104.0
75°	193.5	177.1	160.7	144.3	128.0	115.9	107.9	100.0	92.1	84.1	82.5
77.5°	144.9	130.5	116.1	101.8	87.5	78.4	74.5	70.7	66.9	63.1	62.1
80°	114.5	102.7	90.8	78.8	66.9	59.8	57.4	55.1	52.8	50.5	49.5
82.5°	86.8	77.6	68.2	58.9	49.7	44.2	42.6	41.0	39.5	37.9	37.3
85°	45.2	40.3	35.4	30.5	25.6	22.8	22.1	21.4	20.7	20.0	20.0
87.5°	13.5	12.4	11.2	9.9	8.7	8.2	8.4	8.6	8.8	9.0	9.0
90°	0.6	2.0	3.3	4.8	6.1	7.3	8.3	9.3	10.3	11.3	12.0
92.5°	11.4	11.3	11.2	11.1	10.9	11.2	11.6	12.1	12.7	13.2	13.5
95°	36.8	32.7	28.5	24.4	20.2	18.5	19.5	20.4	21.2	22.1	22.7
97.5°	73.1	61.4	49.7	37.9	26.2	21.4	23.4	25.5	27.6	29.5	30.1
100°	100.3	83.0	65.8	48.6	31.3	23.8	25.9	28.0	30.2	32.3	33.3
102.5°	130.2	126.6	122.9	119.3	115.6	104.8	86.9	69.0	51.1	33.2	34.5
105°	172.3	176.0	179.8	183.6	187.4	172.1	137.7	103.3	68.9	34.5	36.0
107.5°	220.2	223.2	226.3	229.3	232.4	213.3	172.1	130.9	89.6	48.4	47.0
110°	251.0	253.7	256.4	259.0	261.6	244.7	208.3	172.0	135.5	99.2	86.6

TEST NUMBER: P331720-927

CATALOG NUMBER: SA2XXRDIP-C865D725U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	280.0	282.4	284.7	287.1	289.4	286.1	277.1	268.1	259.1	250.1	204.2
115°	325.8	328.0	330.1	332.2	334.4	337.1	340.2	343.3	346.5	349.7	291.4
117.5°	366.8	369.2	371.5	373.9	376.3	378.6	380.8	382.9	385.1	387.3	373.2
120°	396.6	398.5	400.4	402.3	404.3	406.3	408.6	410.8	413.1	415.3	416.8
122.5°	422.1	424.1	426.0	428.0	430.0	432.2	434.7	437.2	439.7	442.1	443.0
125°	460.7	462.3	464.0	465.6	467.2	469.3	471.7	474.0	476.4	478.9	479.7
127.5°	495.7	497.6	499.4	501.1	503.0	504.8	506.6	508.3	510.2	511.9	513.3
130°	517.9	520.0	522.0	523.9	526.0	527.7	529.1	530.4	531.9	533.2	534.6
132.5°	540.6	542.3	544.1	545.7	547.5	549.0	550.4	551.8	553.2	554.5	555.7
135°	570.1	572.1	574.1	576.2	578.1	579.7	580.8	581.9	583.1	584.2	585.5
137.5°	599.9	601.3	602.7	604.1	605.5	606.9	608.2	609.4	610.7	612.0	613.2
140°	619.4	620.4	621.4	622.4	623.4	624.6	626.0	627.4	628.8	630.2	631.3
142.5°	635.7	636.6	637.5	638.4	639.3	640.6	642.1	643.7	645.3	646.9	647.9
145°	661.3	661.2	661.1	660.9	660.8	661.8	663.9	666.1	668.2	670.3	671.3
147.5°	683.7	683.2	682.7	682.2	681.8	682.5	684.7	686.7	688.9	691.0	691.7
150°	698.2	697.3	696.4	695.5	694.6	695.2	697.2	699.2	701.2	703.2	704.0
152.5°	710.3	709.4	708.4	707.4	706.5	706.9	708.8	710.7	712.6	714.5	715.3
155°	728.2	727.1	725.9	724.8	723.7	723.8	725.3	726.8	728.3	729.8	730.6
157.5°	742.1	741.2	740.2	739.3	738.3	738.3	739.4	740.5	741.5	742.6	743.5
160°	750.3	749.5	748.8	748.0	747.3	747.3	748.0	748.8	749.5	750.3	751.1
162.5°	757.6	756.8	756.1	755.3	754.5	754.5	755.1	755.7	756.5	757.1	758.0
165°	767.3	766.5	765.8	765.0	764.2	764.1	764.5	764.9	765.2	765.6	766.4
167.5°	774.5	773.8	773.0	772.3	771.5	771.3	771.7	772.0	772.4	772.7	773.6
170°	778.6	777.8	777.1	776.3	775.6	775.3	775.6	775.9	776.1	776.3	777.2
172.5°	781.3	780.5	779.8	779.0	778.3	778.1	778.3	778.6	778.8	779.0	780.0
175°	784.8	783.9	783.1	782.2	781.3	781.0	781.3	781.5	781.7	782.0	782.9
177.5°	785.4	784.7	784.0	783.3	782.6	782.3	782.4	782.5	782.6	782.7	783.4
180°	783.2	783.2	783.2	783.2	783.2	783.2	783.2	783.2	783.2	783.2	783.2

TEST NUMBER: P331720-927

CATALOG NUMBER: SA2XXRDIP-C865D725U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6
2.5°	1156.0	1157.9	1159.8	1160.5	1160.2	1159.8	1159.4	1159.0
5°	1146.8	1148.9	1151.0	1151.8	1151.0	1150.3	1149.6	1148.9
7.5°	1128.3	1128.9	1129.5	1129.2	1128.0	1126.8	1125.5	1124.3
10°	1109.7	1109.0	1108.3	1107.2	1105.8	1104.5	1103.0	1101.6
12.5°	1088.4	1087.1	1085.8	1084.1	1081.7	1079.4	1077.1	1074.8
15°	1048.6	1044.2	1039.7	1036.3	1034.0	1031.7	1029.4	1027.0
17.5°	1003.6	998.3	993.1	988.4	984.4	980.4	976.4	972.3
20°	972.2	966.4	960.5	955.1	949.9	944.8	939.6	934.5
22.5°	937.8	930.3	922.7	917.0	913.2	909.3	905.5	901.7
25°	880.7	871.1	861.5	854.9	851.4	848.0	844.5	841.0
27.5°	826.2	815.0	803.8	795.5	790.0	784.3	778.8	773.2
30°	787.7	775.8	763.8	754.7	748.5	742.1	735.9	729.5
32.5°	749.0	735.4	721.8	712.0	706.2	700.2	694.3	688.3
35°	688.5	673.8	659.1	649.2	644.0	638.9	633.7	628.6
37.5°	629.6	613.4	597.2	586.1	580.3	574.3	568.5	562.6
40°	590.2	573.6	557.0	545.7	539.6	533.5	527.4	521.4
42.5°	550.4	533.2	516.1	504.5	498.7	492.8	486.9	481.0
45°	492.4	475.9	459.2	448.1	442.5	437.0	431.3	425.7
47.5°	436.0	419.5	403.1	392.3	387.2	382.1	377.0	371.9
50°	399.8	383.7	367.6	357.0	352.1	347.2	342.3	337.4
52.5°	365.6	350.1	334.5	324.5	319.9	315.4	310.9	306.3
55°	313.6	299.6	285.6	276.3	271.9	267.4	263.0	258.6
57.5°	266.3	253.5	240.7	232.3	228.6	224.8	221.1	217.4
60°	233.7	221.8	209.8	202.1	198.3	194.6	190.8	187.1
62.5°	205.4	194.1	182.7	175.9	173.6	171.4	169.1	166.9
65°	167.0	159.1	151.1	146.8	146.1	145.4	144.7	144.0
67.5°	134.8	131.2	127.5	125.3	124.6	123.8	123.1	122.4
70°	117.2	114.9	112.6	111.0	110.0	109.1	108.1	107.2
72.5°	102.0	100.1	98.1	96.9	96.3	95.7	95.1	94.6
75°	80.8	79.2	77.6	76.6	76.4	76.1	75.9	75.7
77.5°	61.2	60.3	59.3	58.7	58.3	57.9	57.6	57.2
80°	48.6	47.7	46.7	46.3	46.3	46.3	46.3	46.3
82.5°	36.8	36.1	35.6	35.3	35.3	35.3	35.3	35.3
85°	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
87.5°	8.9	8.8	8.7	8.7	8.8	8.9	8.9	9.0
90°	12.6	13.2	13.9	14.3	14.6	14.8	15.1	15.3
92.5°	13.8	14.1	14.4	14.7	14.8	15.0	15.1	15.3
95°	23.4	24.0	24.6	24.9	24.7	24.6	24.5	24.4
97.5°	30.6	31.1	31.6	31.9	32.1	32.2	32.4	32.6
100°	34.3	35.3	36.4	37.0	37.2	37.5	37.7	37.9
102.5°	35.8	37.2	38.4	39.3	39.6	40.0	40.3	40.7
105°	37.3	38.7	40.1	41.0	41.6	42.1	42.5	43.1
107.5°	45.6	44.1	42.8	42.3	42.8	43.3	43.8	44.3
110°	74.0	61.4	48.8	42.8	43.3	43.7	44.3	44.8

TEST NUMBER: P331720-927

CATALOG NUMBER: SA2XXRDIP-C865D725U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	158.3	112.3	66.4	43.6	44.0	44.4	44.8	45.2
115°	233.1	174.8	116.5	82.7	73.7	64.6	55.5	46.5
117.5°	359.1	344.9	330.8	308.9	279.1	249.3	219.5	189.7
120°	418.4	419.9	421.4	413.7	396.6	379.7	362.7	345.7
122.5°	443.9	444.8	445.8	444.6	441.2	437.9	434.7	431.3
125°	480.6	481.5	482.4	483.0	483.4	483.8	484.1	484.5
127.5°	514.5	515.8	517.1	517.8	517.8	517.9	518.0	518.1
130°	536.0	537.4	538.8	539.4	539.3	539.2	539.0	538.9
132.5°	556.9	558.1	559.3	559.8	559.7	559.6	559.4	559.3
135°	586.8	588.0	589.3	589.8	589.5	589.3	589.0	588.7
137.5°	614.5	615.7	617.0	617.3	617.0	616.5	616.1	615.6
140°	632.4	633.5	634.7	634.9	634.3	633.7	633.0	632.4
142.5°	649.0	650.0	651.0	651.3	650.6	650.0	649.4	648.7
145°	672.2	673.0	673.9	674.0	673.4	672.8	672.2	671.5
147.5°	692.3	693.0	693.6	693.7	693.2	692.6	692.1	691.6
150°	704.7	705.5	706.2	706.3	705.7	705.0	704.4	703.8
152.5°	716.1	716.8	717.6	717.6	716.8	715.9	715.1	714.2
155°	731.4	732.1	732.9	732.8	731.7	730.8	729.8	728.7
157.5°	744.3	745.1	746.0	745.9	745.0	743.9	743.0	742.0
160°	751.8	752.6	753.3	753.2	752.3	751.5	750.6	749.7
162.5°	758.8	759.6	760.5	760.4	759.3	758.2	757.2	756.1
165°	767.3	768.3	769.1	769.1	768.3	767.3	766.4	765.6
167.5°	774.5	775.4	776.3	776.1	775.0	773.9	772.7	771.6
170°	778.1	779.0	779.9	779.7	778.6	777.4	776.3	775.2
172.5°	780.9	781.7	782.6	782.4	781.3	780.2	779.0	777.9
175°	783.8	784.7	785.5	785.4	784.1	782.8	781.6	780.3
177.5°	784.1	784.8	785.5	785.4	784.5	783.6	782.7	781.8
180°	783.2	783.2	783.2	783.2	783.2	783.2	783.2	783.2

(END OF REPORT)