

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331763

Luminaire Tested: **SA2XXRDIP-C1005D1080U835-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331763
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C1005D1080U835-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7337.4 lumens
Efficiency: N/A
Efficacy: 102.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331763

CATALOG NUMBER: SA2XXRDIP-C1005D1080U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

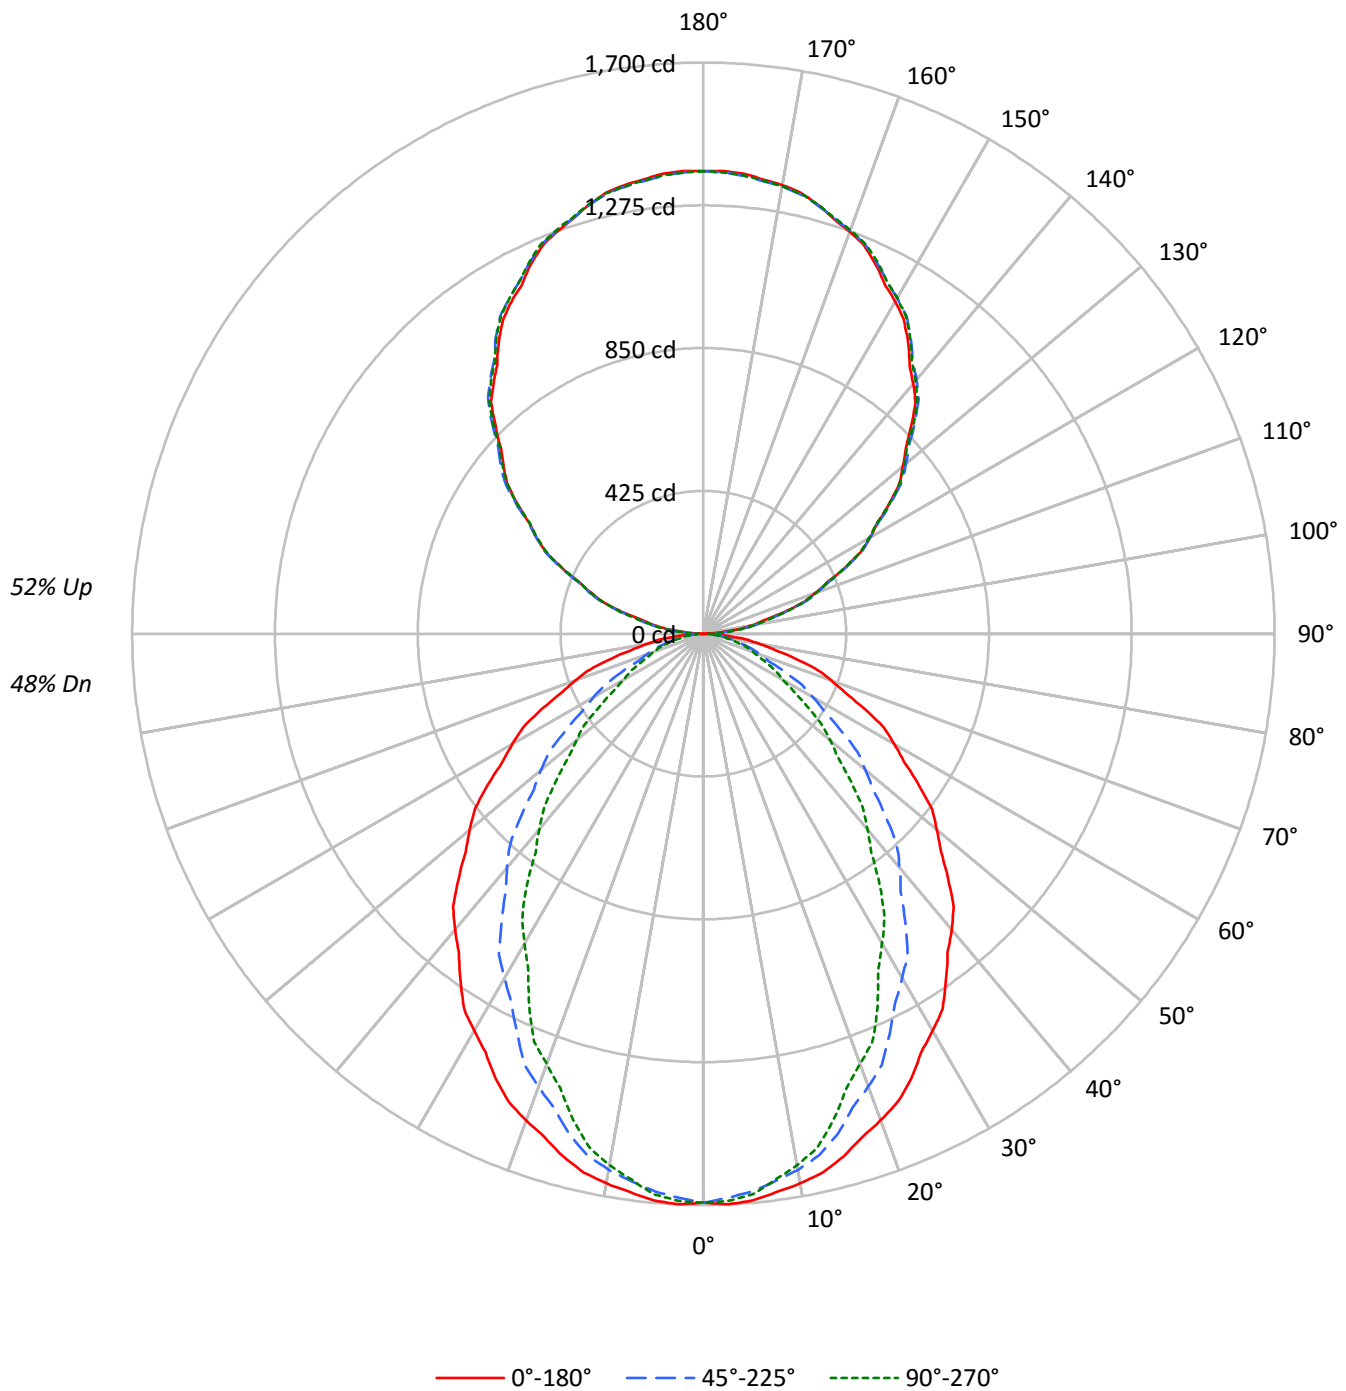

TEST NUMBER: P331763

CATALOG NUMBER: SA2XXRDIP-C1005D1080U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54
1	98	94	90	86	90	86	83	80	72	70	68	60	58	57	48	47	46
2	89	82	76	71	82	76	71	67	64	60	57	53	51	48	43	41	40
3	82	73	66	60	75	67	61	56	57	52	49	47	44	41	39	36	34
4	75	65	57	51	69	60	53	48	51	46	42	43	39	36	35	32	30
5	69	58	50	44	63	54	47	41	46	40	36	38	34	31	32	29	26
6	64	52	44	38	58	48	41	36	41	36	32	35	31	28	29	26	23
7	59	47	39	34	54	44	37	32	38	32	28	32	28	25	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	37	30	26	32	26	23	27	23	20	23	19	17
10	48	36	29	24	44	34	27	23	29	24	21	25	21	18	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	27341	27341	27341
5°	27446	27000	27149
10°	27237	26558	26332
15°	26924	25770	25028
20°	26490	24646	23409
25°	26045	23370	21841
30°	25430	22057	19829
35°	24829	20631	18065
40°	24226	19155	16021
45°	23516	17497	14173
50°	22790	15822	12356
55°	22044	14021	10612
60°	21180	12126	8809
65°	20199	10189	8023
70°	19029	8393	7378
75°	17592	7648	6881
80°	15528	6843	6267
85°	12208	5391	5391

TEST NUMBER: P331763

CATALOG NUMBER: SA2XXRDIP-C1005D1080U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	158.5	2.2
10°-20°	435.2	5.9
20°-30°	611.2	8.3
30°-40°	666.5	9.1
40°-50°	612.8	8.4
50°-60°	481.3	6.6
60°-70°	313.8	4.3
70°-80°	161.8	2.2
80°-90°	47.5	0.6
90°-100°	87.2	1.2
100°-110°	270.9	3.7
110°-120°	463.1	6.3
120°-130°	608.9	8.3
130°-140°	683.5	9.3
140°-150°	670.1	9.1
150°-160°	562.1	7.7
160°-170°	372.8	5.1
170°-180°	130.3	1.8
0°-30°	1204.9	16.4
0°-40°	1871.4	25.5
0°-60°	2965.4	40.4
0°-90°	3488.5	47.5
90°-120°	821.2	11.2
90°-150°	2783.7	37.9
90°-180°	3849.0	52.5
0°-180°	7337.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1693	1693	1693	1693	1693	
5°	1693	1685	1666	1679	1675	160
15°	1611	1592	1542	1513	1497	454
25°	1462	1410	1312	1251	1226	672
35°	1260	1178	1047	954	916	788
45°	1030	924	766	661	621	795
55°	783	661	498	410	377	700
65°	529	404	267	217	210	524
75°	282	178	123	112	110	298
85°	66	35	29	29	29	78
90°	1	16	41	39	40	6
95°	60	72	74	74	72	69
105°	250	253	256	258	258	264
115°	465	471	469	468	465	459
125°	676	686	683	680	678	604
135°	875	887	890	888	885	675
145°	1062	1070	1077	1078	1073	663
155°	1214	1217	1221	1226	1223	558
165°	1321	1320	1320	1327	1322	372
175°	1374	1371	1368	1376	1370	130
180°	1376	1376	1376	1376	1376	



TEST NUMBER: P331763

CATALOG NUMBER: SA2XXRDIP-C1005D1080U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4
2.5°	1699.6	1698.2	1696.8	1695.5	1694.1	1691.9	1688.9	1686.0	1683.0	1680.0	1682.7
5°	1693.4	1691.7	1690.0	1688.3	1686.6	1683.6	1679.1	1674.7	1670.3	1665.9	1668.9
7.5°	1676.0	1673.9	1671.8	1669.6	1667.5	1663.9	1658.7	1653.5	1648.4	1643.2	1644.1
10°	1661.3	1658.9	1656.5	1654.1	1651.7	1647.1	1640.3	1633.5	1626.7	1619.9	1618.9
12.5°	1642.9	1639.9	1637.0	1634.1	1631.2	1625.3	1616.6	1607.9	1599.2	1590.5	1588.6
15°	1610.7	1606.9	1603.2	1599.4	1595.7	1588.0	1576.5	1564.9	1553.3	1541.7	1535.3
17.5°	1571.1	1565.4	1559.7	1554.0	1548.3	1538.0	1523.1	1508.3	1493.4	1478.6	1470.9
20°	1541.7	1534.9	1528.1	1521.3	1514.5	1502.6	1485.5	1468.5	1451.5	1434.4	1425.9
22.5°	1509.8	1502.2	1494.6	1487.0	1479.3	1465.9	1446.7	1427.5	1408.3	1389.1	1378.1
25°	1462.0	1451.1	1440.2	1429.3	1418.4	1401.8	1379.3	1356.8	1334.3	1311.8	1297.9
27.5°	1404.4	1392.6	1380.7	1368.9	1357.0	1338.4	1313.1	1287.7	1262.4	1237.1	1220.8
30°	1364.0	1351.0	1338.1	1325.1	1312.2	1292.1	1264.8	1237.6	1210.4	1183.1	1165.7
32.5°	1324.7	1309.6	1294.5	1279.4	1264.2	1242.8	1215.0	1187.2	1159.4	1131.6	1111.8
35°	1259.7	1242.4	1225.0	1207.6	1190.3	1166.6	1136.6	1106.7	1076.7	1046.7	1025.3
37.5°	1194.8	1175.7	1156.6	1137.5	1118.5	1093.0	1061.0	1029.1	997.1	965.2	941.6
40°	1149.4	1129.0	1108.5	1088.1	1067.7	1040.9	1007.9	974.9	941.8	908.8	884.6
42.5°	1102.8	1081.3	1059.8	1038.2	1016.7	988.9	954.8	920.6	886.5	852.4	827.4
45°	1029.9	1007.0	984.2	961.4	938.6	909.3	873.5	837.8	802.0	766.3	742.1
47.5°	958.7	934.6	910.4	886.2	862.0	831.5	794.6	757.6	720.7	683.8	659.8
50°	907.3	883.1	858.9	834.7	810.5	779.7	742.3	704.8	667.3	629.9	606.4
52.5°	857.0	831.7	806.5	781.2	755.9	725.0	688.3	651.7	615.0	578.4	555.7
55°	783.1	756.6	730.0	703.4	676.9	645.2	608.4	571.6	534.9	498.1	477.6
57.5°	707.4	680.2	652.9	625.7	598.4	567.1	531.8	496.4	461.1	425.7	407.0
60°	655.9	628.7	601.4	574.2	546.9	515.8	480.7	445.6	410.5	375.5	358.1
62.5°	605.7	578.4	551.2	523.9	496.7	466.3	432.9	399.4	366.0	332.6	316.0
65°	528.7	501.1	473.6	446.0	418.4	389.3	358.6	328.0	297.3	266.7	255.1
67.5°	454.5	427.2	399.8	372.4	345.0	317.5	290.0	262.4	234.8	207.2	201.9
70°	403.1	376.5	349.9	323.4	296.8	271.8	248.3	224.8	201.3	177.8	174.4
72.5°	354.0	328.5	303.1	277.6	252.1	229.9	211.1	192.2	173.3	154.5	151.6
75°	282.0	258.1	234.3	210.5	186.6	168.9	157.3	145.8	134.2	122.6	120.2
77.5°	211.2	190.3	169.4	148.5	127.5	114.3	108.7	103.1	97.5	92.0	90.6
80°	167.0	149.7	132.3	114.9	97.6	87.2	83.8	80.4	77.0	73.6	72.2
82.5°	126.6	113.0	99.5	85.9	72.4	64.4	62.1	59.8	57.5	55.2	54.4
85°	65.9	58.7	51.6	44.4	37.3	33.2	32.2	31.2	30.1	29.1	29.1
87.5°	19.8	18.3	16.7	15.2	13.6	13.4	14.5	15.7	16.8	17.9	17.6
90°	1.2	4.3	7.4	10.5	13.6	17.9	23.6	29.3	35.0	40.7	40.1
92.5°	20.7	22.9	25.2	27.5	29.8	31.6	32.9	34.3	35.6	36.9	37.0
95°	60.4	63.0	65.6	68.1	70.7	72.3	72.8	73.3	73.8	74.3	74.3
97.5°	110.4	112.6	114.9	117.2	119.4	121.1	122.0	123.0	124.0	125.0	125.0
100°	147.5	149.6	151.7	153.7	155.8	157.2	158.0	158.7	159.5	160.3	160.3
102.5°	186.6	188.2	189.9	191.5	193.2	194.5	195.5	196.4	197.4	198.4	198.6
105°	249.7	250.5	251.3	252.1	252.8	253.5	254.0	254.5	255.0	255.5	256.1
107.5°	313.4	314.5	315.7	316.8	317.9	318.5	318.5	318.5	318.5	318.5	318.7
110°	354.3	355.8	357.4	358.9	360.5	361.3	361.3	361.3	361.3	361.3	361.3

TEST NUMBER: P331763

CATALOG NUMBER: SA2XXRDIP-C1005D1080U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	398.9	400.4	402.0	403.5	405.1	405.8	405.5	405.3	405.1	404.9	404.3
115°	464.6	466.2	467.7	469.3	470.8	471.3	470.8	470.3	469.8	469.3	469.0
117.5°	530.1	532.2	534.3	536.3	538.4	538.7	537.3	535.8	534.4	532.9	532.3
120°	573.8	575.9	578.0	580.0	582.1	582.1	580.0	578.0	575.9	573.8	573.8
122.5°	613.8	616.3	618.7	621.2	623.7	624.2	622.8	621.3	619.9	618.4	617.8
125°	676.0	678.4	680.7	683.0	685.3	686.1	685.3	684.6	683.8	683.0	682.2
127.5°	736.7	739.6	742.6	745.5	748.4	749.5	748.5	747.6	746.7	745.7	744.8
130°	774.8	778.1	781.5	784.8	788.2	789.6	789.1	788.6	788.1	787.6	787.0
132.5°	817.5	820.3	823.0	825.7	828.5	829.9	830.0	830.1	830.2	830.3	829.2
135°	874.7	877.5	880.4	883.2	886.0	887.7	888.2	888.7	889.3	889.8	889.5
137.5°	934.8	937.2	939.5	941.8	944.1	945.6	946.3	947.0	947.6	948.3	948.1
140°	971.1	973.4	975.7	978.1	980.4	982.2	983.5	984.8	986.1	987.3	987.3
142.5°	1008.3	1010.6	1012.9	1015.2	1017.5	1019.1	1020.0	1020.9	1021.8	1022.7	1022.9
145°	1061.7	1063.5	1065.3	1067.1	1068.9	1070.6	1072.1	1073.7	1075.2	1076.8	1077.0
147.5°	1109.3	1111.5	1113.6	1115.8	1118.0	1119.6	1120.6	1121.7	1122.7	1123.7	1124.3
150°	1141.8	1143.4	1144.9	1146.5	1148.0	1149.3	1150.4	1151.4	1152.4	1153.5	1154.2
152.5°	1170.6	1172.2	1173.7	1175.3	1176.8	1178.2	1179.5	1180.7	1182.0	1183.2	1184.2
155°	1213.9	1214.6	1215.4	1216.2	1217.0	1217.7	1218.5	1219.3	1220.1	1220.8	1222.1
157.5°	1250.8	1251.3	1251.8	1252.3	1252.9	1253.3	1253.8	1254.3	1254.7	1255.2	1257.0
160°	1273.1	1273.6	1274.1	1274.6	1275.2	1275.5	1275.8	1276.1	1276.3	1276.6	1278.1
162.5°	1293.5	1293.6	1293.7	1293.8	1294.0	1294.1	1294.4	1294.6	1294.9	1295.2	1296.9
165°	1320.7	1320.5	1320.2	1319.9	1319.7	1319.6	1319.6	1319.6	1319.6	1319.6	1321.4
167.5°	1343.5	1342.7	1341.9	1341.2	1340.4	1340.0	1339.9	1339.9	1339.8	1339.8	1341.6
170°	1355.6	1354.8	1354.0	1353.2	1352.5	1352.0	1351.7	1351.4	1351.2	1350.9	1352.7
172.5°	1363.9	1363.2	1362.4	1361.6	1360.8	1360.3	1360.1	1359.8	1359.5	1359.3	1361.1
175°	1374.2	1373.4	1372.6	1371.8	1371.1	1370.4	1369.9	1369.4	1368.9	1368.3	1370.2
177.5°	1378.3	1377.7	1377.1	1376.5	1375.9	1375.3	1374.9	1374.5	1374.1	1373.7	1374.9
180°	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5

TEST NUMBER: P331763

CATALOG NUMBER: SA2XXRDIP-C1005D1080U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4
2.5°	1685.4	1688.1	1690.9	1691.9	1691.4	1690.9	1690.3	1689.8
5°	1672.0	1675.1	1678.1	1679.1	1678.1	1677.1	1676.1	1675.1
7.5°	1644.9	1645.8	1646.7	1646.3	1644.5	1642.7	1641.0	1639.2
10°	1617.8	1616.8	1615.8	1614.3	1612.2	1610.2	1608.1	1606.1
12.5°	1586.8	1584.9	1583.1	1580.5	1577.1	1573.7	1570.3	1566.9
15°	1528.8	1522.3	1515.8	1510.9	1507.5	1504.1	1500.7	1497.3
17.5°	1463.2	1455.5	1447.8	1441.0	1435.2	1429.3	1423.4	1417.6
20°	1417.4	1408.9	1400.4	1392.4	1384.9	1377.4	1369.9	1362.4
22.5°	1367.2	1356.2	1345.2	1336.9	1331.4	1325.8	1320.2	1314.6
25°	1283.9	1270.0	1256.0	1246.5	1241.3	1236.2	1231.1	1226.0
27.5°	1204.5	1188.2	1171.9	1159.7	1151.6	1143.5	1135.4	1127.3
30°	1148.4	1131.0	1113.6	1100.4	1091.2	1082.0	1072.8	1063.6
32.5°	1092.0	1072.2	1052.3	1038.1	1029.5	1020.8	1012.1	1003.5
35°	1003.8	982.4	960.9	946.4	938.9	931.4	923.9	916.5
37.5°	917.9	894.3	870.6	854.5	846.0	837.4	828.8	820.2
40°	860.4	836.2	812.1	795.6	786.7	777.8	769.0	760.1
42.5°	802.4	777.4	752.4	735.6	727.0	718.4	709.9	701.3
45°	717.9	693.7	669.5	653.4	645.2	637.0	628.8	620.7
47.5°	635.7	611.7	587.6	571.9	564.5	557.1	549.6	542.2
50°	582.9	559.4	535.9	520.5	513.4	506.2	499.1	491.9
52.5°	533.0	510.3	487.7	473.0	466.4	459.8	453.2	446.6
55°	457.2	436.8	416.3	402.9	396.4	389.9	383.5	377.0
57.5°	388.3	369.5	350.8	338.7	333.3	327.8	322.4	316.9
60°	340.7	323.4	306.0	294.6	289.1	283.7	278.2	272.8
62.5°	299.5	282.9	266.4	256.4	253.2	249.9	246.6	243.4
65°	243.5	231.9	220.3	214.0	213.0	212.0	211.0	210.0
67.5°	196.6	191.3	185.9	182.7	181.7	180.6	179.5	178.4
70°	171.0	167.6	164.2	161.8	160.4	159.0	157.7	156.3
72.5°	148.8	145.9	143.0	141.2	140.4	139.6	138.7	137.9
75°	117.8	115.5	113.1	111.7	111.4	111.0	110.7	110.3
77.5°	89.2	87.9	86.5	85.5	85.0	84.5	83.9	83.4
80°	70.8	69.5	68.1	67.4	67.4	67.4	67.4	67.4
82.5°	53.5	52.7	51.9	51.5	51.5	51.5	51.5	51.5
85°	29.1	29.1	29.1	29.1	29.1	29.1	29.1	29.1
87.5°	17.2	16.8	16.4	16.3	16.3	16.4	16.4	16.5
90°	39.6	39.1	38.6	38.5	38.7	39.0	39.2	39.5
92.5°	37.1	37.2	37.4	37.4	37.5	37.5	37.6	37.6
95°	74.3	74.3	74.3	74.1	73.6	73.1	72.5	72.0
97.5°	125.0	125.0	125.0	125.0	124.9	124.9	124.8	124.8
100°	160.3	160.3	160.3	160.2	159.9	159.7	159.4	159.1
102.5°	198.8	199.0	199.2	199.2	198.9	198.7	198.4	198.2
105°	256.6	257.1	257.6	257.9	257.9	257.9	257.9	257.9
107.5°	318.9	319.1	319.3	318.8	317.7	316.5	315.3	314.1
110°	361.3	361.3	361.3	360.9	360.1	359.3	358.5	357.8

TEST NUMBER: P331763

CATALOG NUMBER: SA2XXRDIP-C1005D1080U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	403.7	403.1	402.5	401.9	401.3	400.7	400.2	399.6
115°	468.8	468.5	468.2	467.7	467.0	466.2	465.4	464.6
117.5°	531.7	531.1	530.5	529.8	529.0	528.2	527.4	526.7
120°	573.8	573.8	573.8	573.4	572.7	571.9	571.1	570.3
122.5°	617.2	616.6	615.9	615.4	614.8	614.2	613.7	613.1
125°	681.5	680.7	679.9	679.4	679.1	678.9	678.6	678.4
127.5°	743.9	742.9	742.0	741.1	740.3	739.5	738.7	737.8
130°	786.5	786.0	785.5	784.7	783.7	782.6	781.6	780.6
132.5°	828.0	826.9	825.8	824.8	824.0	823.1	822.3	821.5
135°	889.3	889.0	888.7	888.2	887.4	886.7	885.9	885.1
137.5°	947.9	947.7	947.5	946.9	945.8	944.8	943.8	942.7
140°	987.3	987.3	987.3	986.8	985.8	984.8	983.7	982.7
142.5°	1023.1	1023.3	1023.5	1023.1	1022.0	1021.0	1020.0	1018.9
145°	1077.3	1077.6	1077.8	1077.4	1076.4	1075.4	1074.3	1073.3
147.5°	1124.9	1125.4	1126.0	1125.8	1124.8	1123.8	1122.8	1121.9
150°	1155.0	1155.8	1156.6	1156.6	1155.8	1155.0	1154.2	1153.5
152.5°	1185.2	1186.1	1187.1	1187.1	1186.1	1185.2	1184.2	1183.2
155°	1223.4	1224.7	1226.0	1226.2	1225.5	1224.7	1223.9	1223.1
157.5°	1258.7	1260.5	1262.2	1262.5	1261.2	1260.0	1258.8	1257.5
160°	1279.7	1281.2	1282.8	1283.0	1282.0	1281.0	1279.9	1278.9
162.5°	1298.7	1300.4	1302.2	1302.4	1301.2	1300.0	1298.7	1297.5
165°	1323.2	1325.0	1326.8	1327.0	1325.8	1324.5	1323.2	1321.9
167.5°	1343.4	1345.2	1347.0	1347.2	1345.9	1344.5	1343.2	1341.9
170°	1354.5	1356.3	1358.1	1358.3	1356.7	1355.2	1353.6	1352.1
172.5°	1362.9	1364.7	1366.5	1366.6	1365.1	1363.5	1362.0	1360.4
175°	1372.0	1373.8	1375.6	1375.7	1374.2	1372.6	1371.1	1369.5
177.5°	1376.2	1377.4	1378.6	1378.6	1377.4	1376.2	1374.9	1373.7
180°	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5	1376.5

(END OF REPORT)