

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331685-940

Luminaire Tested: **SA2XXRDIP-C675D530U940-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331685-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C675D530U940-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 530 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3756.1 lumens
Efficiency: N/A
Efficacy: 93.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331685-940

CATALOG NUMBER: SA2XXRDIP-C675D530U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

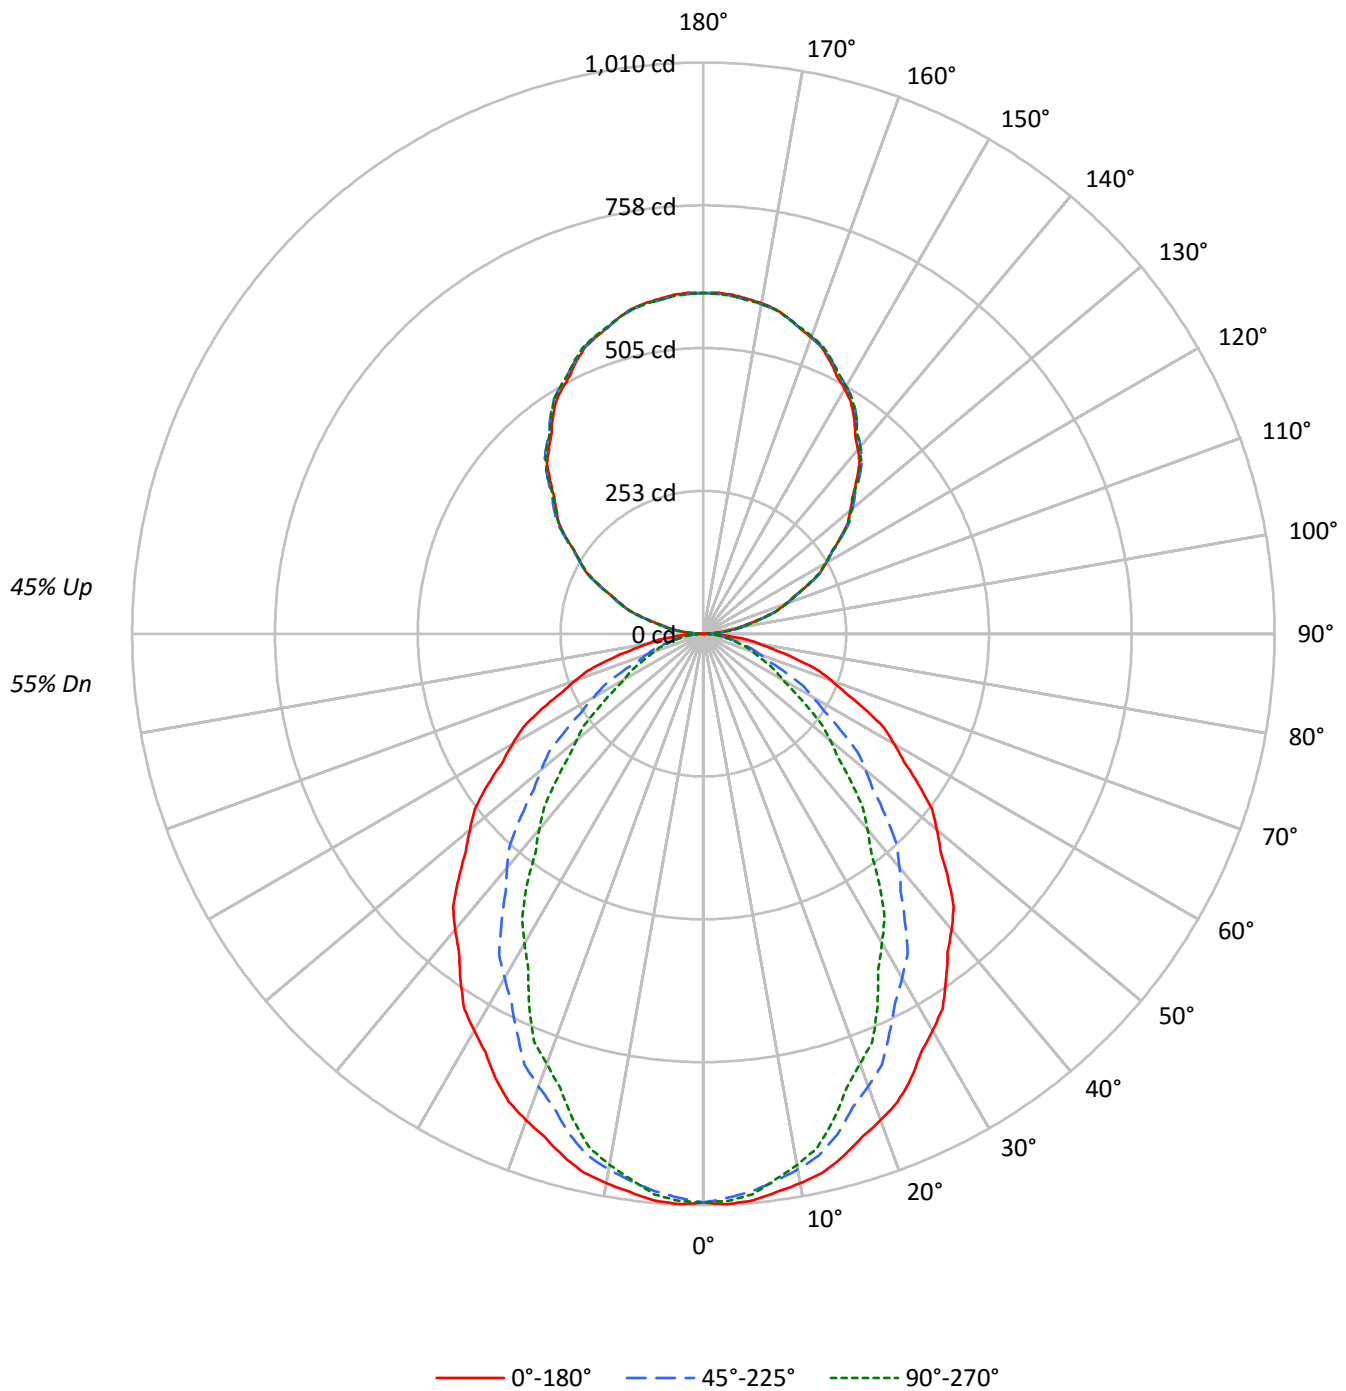



TEST NUMBER: P331685-940

CATALOG NUMBER: SA2XXRDIP-C675D530U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61
1	99	95	92	88	92	89	85	83	76	74	72	65	63	62	55	53	52
2	91	84	78	73	84	78	73	69	68	64	60	58	55	52	49	47	45
3	83	74	67	61	77	69	63	58	60	55	51	52	48	45	44	41	39
4	77	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34
5	70	59	51	45	65	55	48	43	48	43	39	42	38	34	36	32	30
6	65	53	45	40	60	50	43	38	44	38	34	38	34	30	33	29	27
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24
8	56	44	36	31	52	41	35	30	37	31	27	32	27	24	28	24	22
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	26	22	20
10	49	37	30	25	46	35	29	24	31	26	22	27	23	20	24	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16239	16239	16239
5°	16302	16037	16126
10°	16179	15775	15641
15°	15992	15308	14867
20°	15735	14639	13904
25°	15471	13881	12975
30°	15105	13103	11779
35°	14747	12254	10730
40°	14389	11377	9516
45°	13967	10392	8416
50°	13536	9399	7340
55°	13095	8329	6303
60°	12581	7201	5231
65°	12000	6052	4768
70°	11301	4985	4381
75°	10449	4548	4086
80°	9224	4063	3719
85°	7243	3205	3205

TEST NUMBER: P331685-940

CATALOG NUMBER: SA2XXRDIP-C675D530U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.2	2.5
10°-20°	258.5	6.9
20°-30°	363.0	9.7
30°-40°	395.9	10.5
40°-50°	364.0	9.7
50°-60°	285.9	7.6
60°-70°	186.4	5.0
70°-80°	96.1	2.6
80°-90°	27.3	0.7
90°-100°	38.2	1.0
100°-110°	118.6	3.2
110°-120°	202.7	5.4
120°-130°	266.6	7.1
130°-140°	299.2	8.0
140°-150°	293.4	7.8
150°-160°	246.1	6.6
160°-170°	163.2	4.3
170°-180°	57.0	1.5
0°-30°	715.7	19.1
0°-40°	1111.6	29.6
0°-60°	1761.4	46.9
0°-90°	2071.3	55.1
90°-120°	359.5	9.6
90°-150°	1218.6	32.4
90°-180°	1685.0	44.9
0°-180°	3756.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1006	1006	1006	1006	1006	
5°	1006	1001	990	997	995	95
15°	957	946	916	899	889	269
25°	868	838	779	743	728	399
35°	748	700	622	566	544	468
45°	612	549	455	393	369	472
55°	465	393	296	243	224	416
65°	314	240	158	129	125	311
75°	168	106	73	67	66	177
85°	39	21	17	17	17	46
90°	0	7	18	17	17	3
95°	26	31	32	32	32	30
105°	109	111	112	113	113	115
115°	203	206	206	205	203	201
125°	296	300	299	298	297	264
135°	383	388	390	389	387	296
145°	465	468	471	472	470	290
155°	531	533	534	537	536	244
165°	578	578	578	581	579	163
175°	602	600	599	602	600	57
180°	602	602	602	602	602	

TEST NUMBER: P331685-940

CATALOG NUMBER: SA2XXRDIP-C675D530U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8
2.5°	1009.5	1008.7	1007.9	1007.1	1006.3	1005.0	1003.2	1001.4	999.7	997.9	999.5
5°	1005.8	1004.9	1003.9	1002.8	1001.8	1000.1	997.4	994.8	992.1	989.5	991.3
7.5°	995.5	994.3	993.0	991.8	990.5	988.3	985.3	982.2	979.1	976.1	976.5
10°	986.8	985.3	983.9	982.5	981.1	978.4	974.3	970.3	966.3	962.2	961.6
12.5°	975.8	974.1	972.3	970.6	968.8	965.5	960.3	955.1	949.9	944.7	943.6
15°	956.7	954.5	952.3	950.0	947.8	943.3	936.4	929.5	922.7	915.8	912.0
17.5°	933.3	929.9	926.5	923.0	919.6	913.6	904.7	895.9	887.1	878.2	873.7
20°	915.8	911.7	907.7	903.7	899.6	892.5	882.3	872.3	862.2	852.0	846.9
22.5°	896.8	892.3	887.8	883.2	878.7	870.8	859.3	847.9	836.5	825.1	818.6
25°	868.4	861.9	855.5	849.0	842.6	832.6	819.3	805.9	792.6	779.2	770.9
27.5°	834.2	827.2	820.1	813.1	806.0	795.0	780.0	764.9	749.8	734.8	725.1
30°	810.2	802.5	794.8	787.1	779.4	767.5	751.3	735.1	718.9	702.8	692.4
32.5°	786.8	777.8	768.9	759.9	750.9	738.2	721.7	705.2	688.7	672.2	660.4
35°	748.2	738.0	727.6	717.3	707.0	692.9	675.1	657.4	639.5	621.7	608.9
37.5°	709.7	698.3	687.0	675.6	664.3	649.2	630.3	611.3	592.3	573.3	559.3
40°	682.7	670.6	658.4	646.3	634.2	618.3	598.7	579.1	559.5	539.8	525.5
42.5°	655.1	642.3	629.5	616.7	604.0	587.4	567.1	546.9	526.6	506.3	491.4
45°	611.7	598.2	584.6	571.1	557.5	540.1	518.9	497.7	476.4	455.1	440.8
47.5°	569.4	555.1	540.7	526.4	512.0	493.9	472.0	450.0	428.1	406.2	391.9
50°	538.9	524.5	510.1	495.8	481.4	463.2	440.9	418.7	396.4	374.2	360.2
52.5°	509.1	494.0	479.0	464.0	449.0	430.6	408.8	387.1	365.3	343.6	330.1
55°	465.2	449.4	433.6	417.9	402.1	383.3	361.4	339.6	317.7	295.9	283.7
57.5°	420.2	404.0	387.8	371.7	355.4	336.9	315.8	294.9	273.8	252.9	241.7
60°	389.6	373.4	357.2	341.1	324.9	306.4	285.5	264.7	243.9	223.0	212.7
62.5°	359.7	343.6	327.3	311.2	295.0	277.0	257.2	237.3	217.4	197.5	187.7
65°	314.1	297.7	281.2	264.9	248.5	231.2	213.0	194.8	176.6	158.4	151.5
67.5°	270.0	253.7	237.5	221.2	204.9	188.6	172.2	155.9	139.5	123.1	119.9
70°	239.4	223.6	207.9	192.1	176.3	161.4	147.5	133.5	119.6	105.6	103.5
72.5°	210.3	195.1	180.0	164.9	149.7	136.6	125.4	114.1	103.0	91.8	90.1
75°	167.5	153.4	139.2	125.0	110.8	100.3	93.5	86.6	79.7	72.9	71.4
77.5°	125.5	113.0	100.6	88.2	75.8	67.9	64.6	61.3	58.0	54.7	53.8
80°	99.2	88.9	78.6	68.3	58.0	51.8	49.8	47.7	45.7	43.7	42.9
82.5°	75.2	67.1	59.1	51.0	43.0	38.3	36.9	35.5	34.2	32.8	32.3
85°	39.1	34.9	30.7	26.4	22.1	19.7	19.1	18.5	17.9	17.3	17.3
87.5°	11.8	10.7	9.7	8.6	7.7	7.4	7.9	8.4	8.9	9.4	9.2
90°	0.5	1.9	3.2	4.5	6.0	7.8	10.3	12.8	15.3	17.8	17.6
92.5°	9.1	10.1	11.1	12.0	13.0	13.8	14.4	15.0	15.6	16.1	16.2
95°	26.5	27.6	28.7	29.9	30.9	31.7	31.8	32.1	32.3	32.5	32.5
97.5°	48.3	49.3	50.3	51.3	52.3	53.0	53.4	53.9	54.3	54.8	54.8
100°	64.6	65.5	66.3	67.3	68.2	68.8	69.2	69.5	69.8	70.2	70.2
102.5°	81.7	82.4	83.1	83.8	84.5	85.2	85.6	86.0	86.4	86.9	86.9
105°	109.3	109.7	110.0	110.3	110.7	110.9	111.2	111.4	111.6	111.9	112.1
107.5°	137.2	137.7	138.2	138.7	139.2	139.5	139.5	139.5	139.5	139.5	139.6
110°	155.1	155.8	156.4	157.1	157.8	158.1	158.1	158.1	158.1	158.1	158.1



TEST NUMBER: P331685-940

CATALOG NUMBER: SA2XXRDIP-C675D530U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	174.6	175.3	175.9	176.6	177.4	177.6	177.5	177.5	177.4	177.3	177.0
115°	203.4	204.1	204.7	205.5	206.1	206.3	206.1	205.9	205.6	205.5	205.4
117.5°	232.1	233.0	233.9	234.8	235.7	235.9	235.2	234.5	233.9	233.3	233.0
120°	251.2	252.1	253.0	253.9	254.9	254.9	253.9	253.0	252.1	251.2	251.2
122.5°	268.7	269.7	270.9	272.0	273.0	273.2	272.6	272.0	271.3	270.7	270.5
125°	296.0	296.9	298.0	299.0	300.0	300.3	300.0	299.7	299.3	299.0	298.6
127.5°	322.4	323.8	325.0	326.4	327.6	328.1	327.7	327.3	326.9	326.5	326.0
130°	339.2	340.6	342.1	343.6	345.0	345.6	345.4	345.2	345.0	344.7	344.6
132.5°	357.8	359.1	360.3	361.5	362.7	363.3	363.4	363.4	363.5	363.5	363.0
135°	382.9	384.1	385.4	386.6	387.9	388.6	388.8	389.1	389.3	389.5	389.4
137.5°	409.2	410.3	411.3	412.3	413.3	413.9	414.3	414.6	414.8	415.1	415.0
140°	425.1	426.1	427.1	428.1	429.2	430.0	430.5	431.1	431.7	432.2	432.2
142.5°	441.4	442.4	443.4	444.4	445.4	446.1	446.6	446.9	447.3	447.6	447.7
145°	464.8	465.6	466.4	467.2	468.0	468.7	469.3	470.0	470.7	471.4	471.4
147.5°	485.6	486.5	487.5	488.5	489.4	490.1	490.5	491.0	491.4	492.0	492.1
150°	499.9	500.5	501.2	501.9	502.6	503.1	503.5	504.0	504.4	505.0	505.2
152.5°	512.5	513.2	513.8	514.5	515.1	515.8	516.3	516.8	517.4	518.0	518.4
155°	531.4	531.7	532.1	532.4	532.7	533.1	533.4	533.8	534.0	534.4	535.0
157.5°	547.5	547.8	548.0	548.2	548.5	548.7	548.8	549.1	549.3	549.5	550.3
160°	557.3	557.5	557.8	557.9	558.2	558.4	558.5	558.6	558.7	558.8	559.5
162.5°	566.2	566.3	566.3	566.4	566.4	566.5	566.6	566.8	566.9	566.9	567.8
165°	578.2	578.0	577.9	577.8	577.7	577.7	577.7	577.7	577.7	577.7	578.5
167.5°	588.1	587.8	587.5	587.1	586.7	586.6	586.6	586.6	586.5	586.5	587.3
170°	593.4	593.1	592.7	592.4	592.1	591.8	591.7	591.6	591.5	591.4	592.2
172.5°	597.1	596.7	596.4	596.0	595.8	595.5	595.4	595.3	595.1	595.0	595.8
175°	601.5	601.2	600.8	600.6	600.2	599.9	599.7	599.5	599.2	599.0	599.8
177.5°	603.4	603.1	602.8	602.5	602.3	602.1	601.9	601.7	601.5	601.4	601.9
180°	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5

TEST NUMBER: P331685-940

CATALOG NUMBER: SA2XXRDIP-C675D530U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8
2.5°	1001.1	1002.7	1004.3	1005.0	1004.7	1004.3	1004.1	1003.7
5°	993.1	995.0	996.8	997.4	996.8	996.1	995.6	995.0
7.5°	977.0	977.6	978.1	977.9	976.8	975.8	974.7	973.7
10°	961.0	960.4	959.7	958.9	957.6	956.4	955.2	954.0
12.5°	942.5	941.5	940.3	938.8	936.7	934.8	932.7	930.7
15°	908.1	904.2	900.4	897.4	895.5	893.4	891.4	889.4
17.5°	869.2	864.5	860.0	856.0	852.5	849.0	845.5	842.0
20°	842.0	836.9	831.8	827.1	822.6	818.1	813.7	809.2
22.5°	812.1	805.6	799.1	794.2	790.8	787.5	784.2	780.9
25°	762.6	754.3	746.0	740.4	737.4	734.3	731.3	728.3
27.5°	715.4	705.8	696.2	688.8	684.0	679.2	674.4	669.6
30°	682.2	671.8	661.5	653.6	648.1	642.7	637.2	631.8
32.5°	648.6	636.9	625.1	616.6	611.4	606.4	601.2	596.1
35°	596.3	583.5	570.8	562.1	557.7	553.2	548.8	544.4
37.5°	545.2	531.2	517.2	507.6	502.5	497.4	492.3	487.2
40°	511.0	496.7	482.3	472.5	467.3	462.0	456.7	451.5
42.5°	476.6	461.7	446.9	436.9	431.9	426.8	421.7	416.5
45°	426.4	412.1	397.7	388.1	383.3	378.4	373.5	368.6
47.5°	377.6	363.4	349.0	339.7	335.3	330.9	326.5	322.1
50°	346.3	332.3	318.3	309.2	305.0	300.7	296.5	292.2
52.5°	316.6	303.1	289.6	281.0	277.1	273.1	269.2	265.3
55°	271.6	259.4	247.3	239.3	235.5	231.6	227.7	223.9
57.5°	230.6	219.5	208.4	201.2	198.0	194.7	191.5	188.2
60°	202.4	192.1	181.7	175.0	171.7	168.5	165.2	162.0
62.5°	177.9	168.0	158.2	152.3	150.3	148.5	146.5	144.5
65°	144.6	137.8	130.9	127.2	126.5	125.9	125.3	124.8
67.5°	116.7	113.6	110.5	108.5	107.9	107.3	106.6	105.9
70°	101.6	99.5	97.5	96.1	95.2	94.4	93.6	92.8
72.5°	88.4	86.7	85.0	83.9	83.4	82.9	82.4	81.9
75°	70.0	68.6	67.1	66.3	66.2	66.0	65.7	65.5
77.5°	53.0	52.2	51.4	50.8	50.5	50.2	49.8	49.5
80°	42.1	41.3	40.5	40.0	40.0	40.0	40.0	40.0
82.5°	31.8	31.3	30.9	30.6	30.6	30.6	30.6	30.6
85°	17.3	17.3	17.3	17.3	17.3	17.3	17.3	17.3
87.5°	9.0	8.7	8.6	8.5	8.5	8.5	8.6	8.6
90°	17.4	17.1	16.9	16.9	16.9	17.0	17.2	17.3
92.5°	16.2	16.3	16.3	16.4	16.4	16.4	16.5	16.5
95°	32.5	32.5	32.5	32.5	32.2	32.0	31.7	31.6
97.5°	54.8	54.8	54.8	54.7	54.7	54.7	54.7	54.6
100°	70.2	70.2	70.2	70.1	70.0	69.9	69.8	69.6
102.5°	87.0	87.1	87.2	87.2	87.1	86.9	86.9	86.8
105°	112.4	112.5	112.8	112.9	112.9	112.9	112.9	112.9
107.5°	139.6	139.7	139.8	139.6	139.0	138.6	138.0	137.5
110°	158.1	158.1	158.1	158.0	157.7	157.3	156.9	156.6

TEST NUMBER: P331685-940

CATALOG NUMBER: SA2XXRDIP-C675D530U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	176.7	176.5	176.2	175.9	175.7	175.4	175.1	175.0
115°	205.2	205.1	205.0	204.7	204.4	204.1	203.8	203.4
117.5°	232.7	232.5	232.2	231.9	231.6	231.2	230.9	230.5
120°	251.2	251.2	251.2	251.0	250.7	250.4	250.0	249.7
122.5°	270.2	269.9	269.7	269.4	269.1	268.9	268.7	268.4
125°	298.3	298.0	297.7	297.4	297.3	297.2	297.0	296.9
127.5°	325.7	325.2	324.9	324.4	324.0	323.7	323.3	323.0
130°	344.3	344.1	343.8	343.5	343.0	342.6	342.1	341.7
132.5°	362.5	361.9	361.5	361.1	360.7	360.3	360.0	359.6
135°	389.3	389.1	389.1	388.8	388.5	388.2	387.8	387.4
137.5°	414.9	414.8	414.7	414.5	414.0	413.6	413.1	412.7
140°	432.2	432.2	432.2	432.0	431.5	431.1	430.6	430.2
142.5°	447.8	447.9	448.0	447.8	447.4	446.9	446.5	446.0
145°	471.6	471.7	471.8	471.6	471.2	470.7	470.3	469.8
147.5°	492.4	492.7	492.9	492.8	492.4	492.0	491.5	491.1
150°	505.6	506.0	506.3	506.3	506.0	505.6	505.2	505.0
152.5°	518.8	519.2	519.7	519.7	519.2	518.8	518.4	518.0
155°	535.6	536.1	536.7	536.8	536.5	536.1	535.7	535.5
157.5°	551.0	551.8	552.6	552.7	552.1	551.6	551.1	550.5
160°	560.2	560.9	561.5	561.7	561.2	560.8	560.3	559.8
162.5°	568.5	569.3	570.1	570.2	569.6	569.1	568.6	568.0
165°	579.3	580.1	580.8	580.9	580.3	579.8	579.3	578.6
167.5°	588.1	588.9	589.7	589.8	589.2	588.6	588.0	587.4
170°	593.0	593.8	594.5	594.6	593.9	593.3	592.5	591.9
172.5°	596.6	597.4	598.2	598.2	597.6	596.9	596.2	595.6
175°	600.6	601.4	602.2	602.3	601.5	600.8	600.2	599.5
177.5°	602.4	603.0	603.5	603.5	603.0	602.4	601.9	601.4
180°	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5

(END OF REPORT)