

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904941

Luminaire Tested: DFN2DIP-4P3F0-030D060US835-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904941
REPORT IS A COMBINATION OF REPORTS P900592 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-030D060US835-RLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8490.0 lumens
Efficiency: N/A
Efficacy: 116.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 73.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904941

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-RLLONL

Luminous Intensity Polar Plot

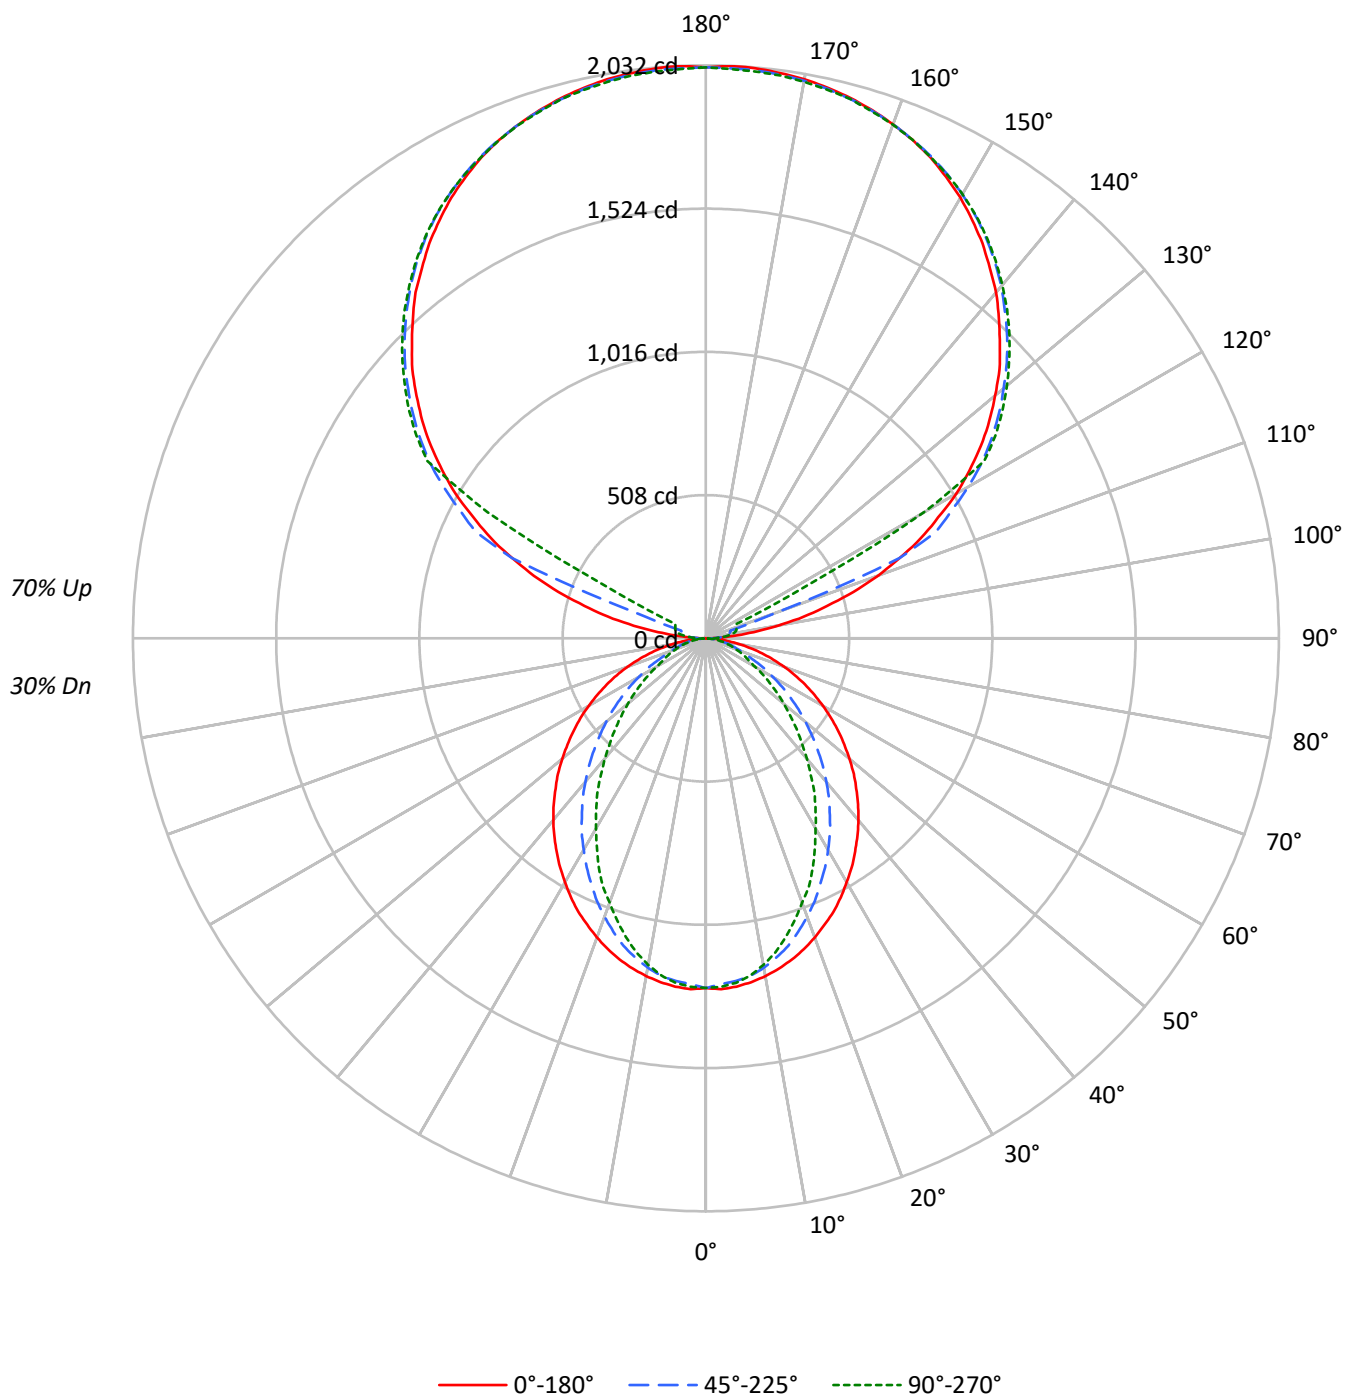

TEST NUMBER: P904941

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	94	90	86	83	84	81	77	75	64	62	60	48	47	46	34	33	32
2	85	78	73	68	76	71	66	62	56	53	50	43	40	39	30	29	28
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16
7	56	44	37	31	50	40	34	29	32	28	24	25	22	19	18	16	15
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13
9	48	37	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12
10	45	33	27	22	40	30	24	20	25	20	17	20	16	14	14	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1413	1413	1413
5°	1414	1390	1399
10°	1399	1361	1353
15°	1379	1316	1282
20°	1353	1253	1196
25°	1326	1182	1112
30°	1290	1110	1006
35°	1255	1033	913
40°	1219	953	806
45°	1177	865	709
50°	1134	775	615
55°	1088	680	524
60°	1036	580	431
65°	976	479	387
70°	903	385	350
75°	810	337	317
80°	678	280	274
85°	459	183	203

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1383 cd/sqm

TEST NUMBER: P904941

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.2	1.4
10°-20°	319.0	3.8
20°-30°	447.9	5.3
30°-40°	488.2	5.8
40°-50°	448.7	5.3
50°-60°	352.4	4.2
60°-70°	229.4	2.7
70°-80°	118.1	1.4
80°-90°	33.7	0.4
90°-100°	66.8	0.8
100°-110°	248.9	2.9
110°-120°	660.2	7.8
120°-130°	1094.9	12.9
130°-140°	1163.0	13.7
140°-150°	1080.9	12.7
150°-160°	869.0	10.2
160°-170°	560.0	6.6
170°-180°	192.7	2.3
0°-30°	883.1	10.4
0°-40°	1371.3	16.2
0°-60°	2172.4	25.6
0°-90°	2553.5	30.1
90°-120°	975.8	11.5
90°-150°	4314.7	50.8
90°-180°	5936.0	69.9
0°-180°	8490.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1240	1240	1240	1240	1240	
5°	1240	1234	1220	1230	1226	118
15°	1179	1167	1129	1108	1096	332
25°	1070	1034	960	914	898	492
35°	922	865	766	696	671	577
45°	754	679	561	481	454	582
55°	573	486	365	297	276	512
65°	387	296	195	157	154	384
75°	206	128	90	82	81	218
85°	48	25	21	21	21	55
90°	1	18	29	37	40	8
95°	95	47	57	65	63	113
105°	445	489	89	105	111	476
115°	842	867	904	226	120	829
125°	1191	1210	1238	1248	1253	1062
135°	1474	1498	1511	1525	1522	1139
145°	1710	1708	1733	1744	1736	1069
155°	1883	1870	1887	1896	1884	868
165°	1984	1975	1980	1990	1980	560
175°	2029	2019	2022	2032	2018	193
180°	2025	2025	2025	2025	2025	

TEST NUMBER: P904941

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1239.9	1239.9	1239.9	1239.9	1239.9
2.5°	1245.5	1239.9	1227.5	1238.8	1236.6
5°	1239.9	1234.3	1219.7	1229.8	1226.4
7.5°	1229.8	1223.1	1207.4	1211.8	1206.2
10°	1216.3	1208.5	1186.1	1182.6	1176.0
12.5°	1199.5	1189.4	1159.1	1152.4	1140.0
15°	1179.3	1166.9	1128.8	1107.5	1096.3
17.5°	1155.7	1137.8	1090.6	1066.0	1048.0
20°	1128.8	1106.3	1050.2	1022.3	997.5
22.5°	1099.7	1073.8	1008.7	970.6	953.8
25°	1070.5	1034.5	960.5	914.5	897.6
27.5°	1035.7	997.5	915.6	862.9	837.0
30°	998.7	956.0	866.2	809.1	778.7
32.5°	962.7	911.1	819.2	751.8	723.7
35°	922.4	865.1	766.4	695.7	671.0
37.5°	883.1	821.3	717.0	639.5	611.6
40°	841.6	774.3	665.4	585.7	556.6
42.5°	798.9	727.2	613.8	530.7	502.7
45°	754.1	678.8	561.1	481.3	454.4
47.5°	711.4	631.8	510.6	430.8	406.2
50°	664.3	584.6	461.2	383.7	360.2
52.5°	618.2	534.1	414.1	340.0	318.7
55°	573.3	485.8	364.6	297.4	276.1
57.5°	527.4	437.6	321.0	258.1	240.1
60°	480.2	390.5	274.9	217.7	199.8
62.5°	434.3	344.5	235.6	181.8	172.9
65°	387.1	296.2	195.2	157.1	153.7
67.5°	342.3	251.3	157.1	138.0	134.6
70°	295.1	207.6	130.1	118.9	114.4
72.5°	250.2	167.1	108.8	99.9	97.6
75°	206.4	127.9	89.8	81.9	80.8
77.5°	162.7	90.8	70.7	66.2	63.9
80°	122.3	65.1	53.8	49.4	49.4
82.5°	85.2	43.8	37.0	34.8	34.8
85°	48.2	24.6	21.3	21.3	21.3
87.5°	18.0	8.9	8.9	7.9	7.9
90°	1.4	17.6	29.2	36.7	39.5
92.5°	36.7	30.8	35.1	38.1	39.5
95°	95.2	46.8	57.1	64.6	63.0
97.5°	171.4	51.3	74.6	79.2	80.6
100°	259.4	58.6	83.5	95.2	98.1
102.5°	356.0	353.2	86.5	102.5	107.0
105°	445.4	489.4	89.4	105.4	111.4
107.5°	549.5	586.0	92.4	108.4	114.3
110°	649.2	679.8	256.5	110.0	115.7

TEST NUMBER: P904941

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	742.9	769.2	744.3	112.7	117.3
115°	842.5	867.4	904.1	225.7	120.2
117.5°	928.9	958.2	983.2	773.6	389.7
120°	1025.7	1047.6	1074.1	1091.6	893.8
122.5°	1107.6	1131.1	1160.5	1169.2	1170.8
125°	1191.2	1210.3	1238.1	1248.4	1252.7
127.5°	1267.4	1287.9	1310.0	1324.6	1326.0
130°	1339.2	1362.7	1378.7	1394.9	1393.5
132.5°	1412.5	1431.6	1447.6	1460.8	1459.4
135°	1474.1	1497.6	1510.6	1525.4	1522.4
137.5°	1538.4	1556.0	1570.8	1585.4	1581.1
140°	1601.4	1613.3	1629.3	1642.5	1635.2
142.5°	1654.3	1664.6	1683.6	1695.2	1687.9
145°	1710.0	1708.4	1733.3	1743.6	1736.3
147.5°	1758.2	1753.8	1778.7	1786.0	1780.3
150°	1805.2	1794.9	1818.4	1827.1	1819.8
152.5°	1844.7	1833.0	1854.9	1863.8	1853.5
155°	1882.8	1869.7	1887.3	1896.0	1884.3
157.5°	1913.6	1901.9	1915.1	1925.4	1913.6
160°	1940.0	1931.1	1940.0	1948.7	1938.5
162.5°	1963.3	1954.6	1961.9	1972.2	1959.0
165°	1983.9	1975.2	1979.5	1989.8	1979.5
167.5°	2000.0	1991.2	1995.7	2006.0	1992.7
170°	2013.3	2004.4	2007.4	2017.6	2004.4
172.5°	2022.0	2013.3	2016.2	2026.5	2013.3
175°	2029.3	2019.0	2022.0	2032.2	2017.6
177.5°	2032.2	2022.0	2023.5	2033.8	2020.6
180°	2024.9	2024.9	2024.9	2024.9	2024.9

TEST NUMBER: P904941

CATALOG NUMBER: DFN2DIP-4P3F0-030D060US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.09	6.78	7.21	7.89	9.42	2.05	2.74	3.17	3.85	5.38
	3H	7.76	8.37	8.88	9.49	11.04	3.23	3.84	4.35	4.96	6.51
	4H	8.35	8.94	9.49	10.06	11.61	3.66	4.25	4.80	5.37	6.92
	6H	8.77	9.30	9.91	10.42	11.99	3.97	4.51	5.11	5.63	7.19
	8H	8.89	9.40	10.03	10.53	12.09	4.06	4.57	5.20	5.70	7.26
	12H	8.94	9.43	10.09	10.55	12.14	4.09	4.58	5.24	5.71	7.29
4H	2H	6.09	6.68	7.23	7.79	9.35	2.63	3.22	3.77	4.33	5.89
	3H	7.90	8.39	9.05	9.53	11.10	3.96	4.45	5.11	5.59	7.15
	4H	8.59	9.03	9.74	10.17	11.75	4.50	4.94	5.65	6.08	7.66
	6H	9.09	9.47	10.24	10.63	12.20	4.90	5.28	6.06	6.44	8.02
	8H	9.26	9.62	10.41	10.76	12.36	5.02	5.38	6.18	6.53	8.12
	12H	9.34	9.67	10.52	10.83	12.42	5.08	5.40	6.25	6.56	8.16
8H	4H	8.54	8.90	9.70	10.05	11.64	4.76	5.12	5.92	6.27	7.86
	6H	9.10	9.39	10.27	10.58	12.17	5.27	5.56	6.44	6.75	8.34
	8H	9.31	9.57	10.49	10.73	12.34	5.45	5.71	6.63	6.88	8.49
	12H	9.44	9.67	10.62	10.83	12.47	5.56	5.79	6.75	6.95	8.60
12H	4H	8.49	8.81	9.66	9.97	11.57	4.76	5.09	5.93	6.24	7.84
	6H	9.07	9.33	10.25	10.50	12.11	5.32	5.57	6.50	6.74	8.35
	8H	9.28	9.51	10.47	10.67	12.32	5.51	5.74	6.70	6.90	8.55

END OF REPORT