

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921320

Luminaire Tested: DFN2DIP-4P3F0-040D040US940-RLLFLL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P921320  
REPORT IS A COMBINATION OF REPORTS P899054 AND P895917  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-4P3F0-040D040US940-RLLFLL  
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6188.5 lumens  
Efficiency: N/A  
Efficacy: 91.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 67.4  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9789  
Total Harmonic Distortion (THDi): 0.074  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P921320

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US940-RLLFLL

### Luminous Intensity Polar Plot

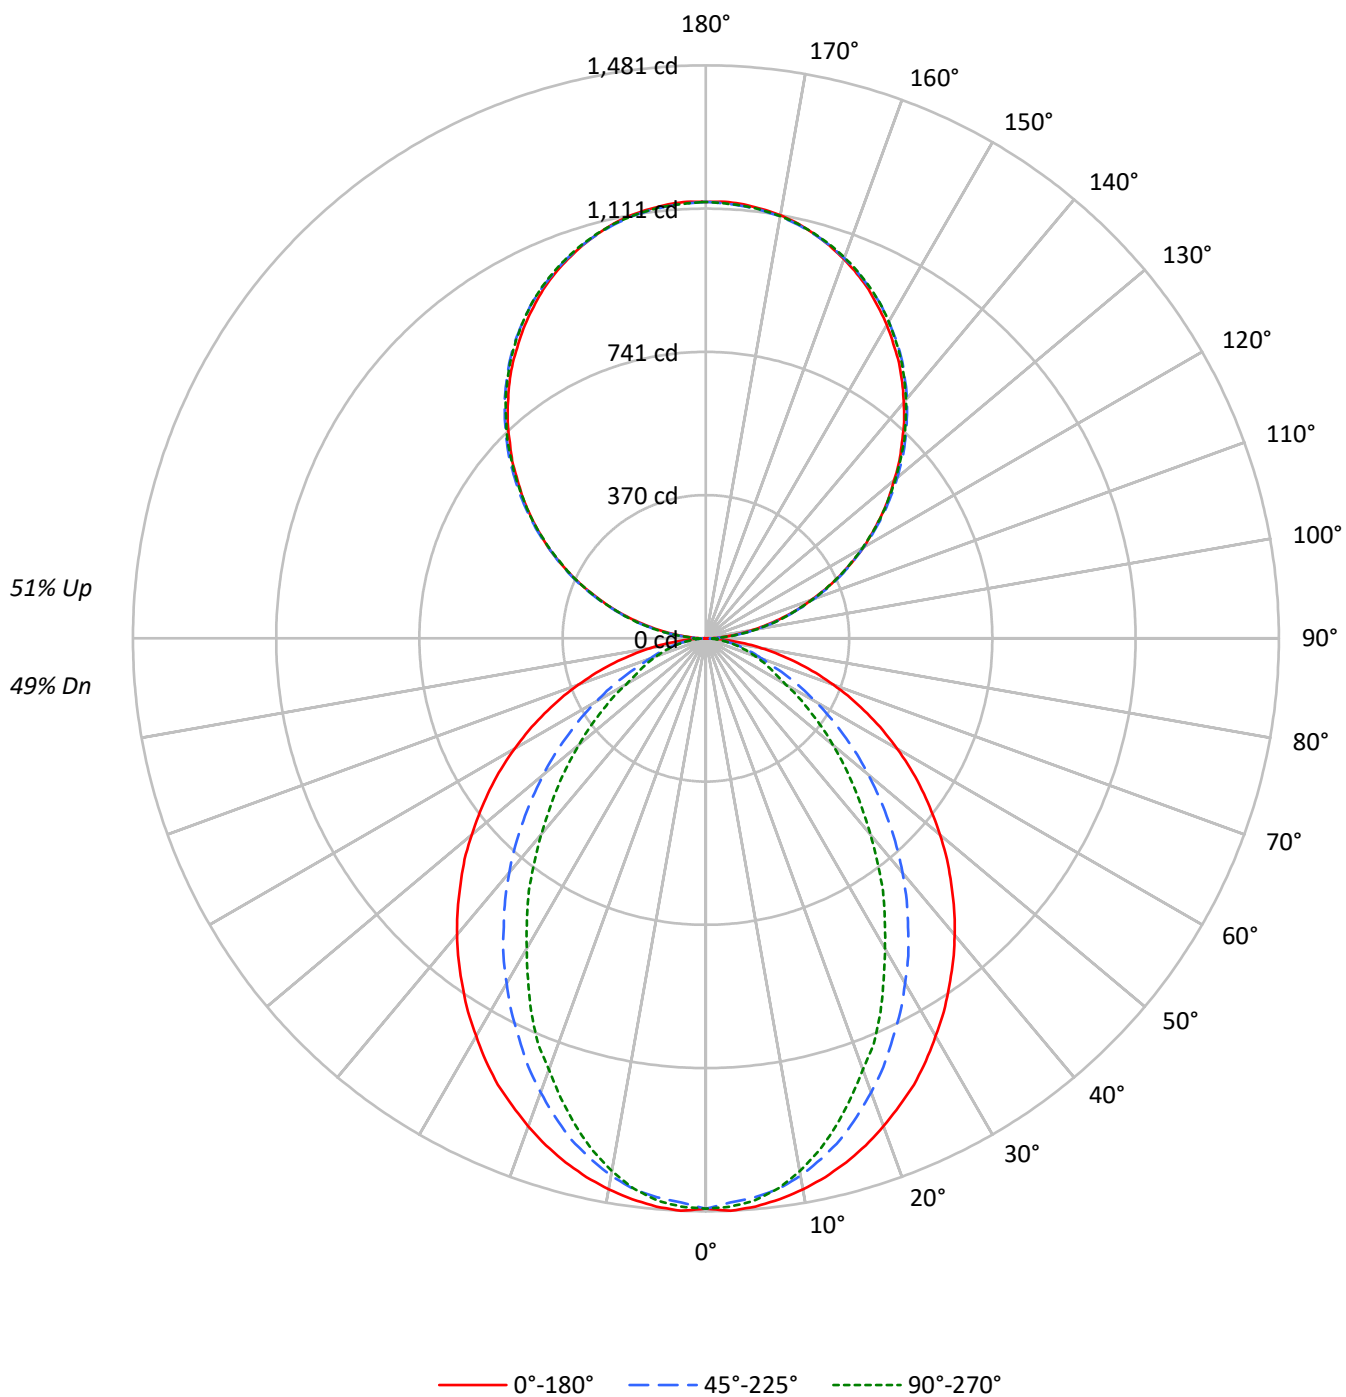

TEST NUMBER: P921320

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US940-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| RF  | 20  |     |     |     | 20 |    |    |    | 20 |    |    |    | 20 |    |    |    | 20 |
| RC  | 80  |     |     |     | 70 |    |    |    | 50 |    |    |    | 30 |    |    |    | 10 |
| RW  | 70  | 50  | 30  | 10  | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| RCR |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 0   | 107 | 107 | 107 | 107 | 99 | 99 | 99 | 99 | 83 | 83 | 83 | 68 | 68 | 68 | 55 | 55 | 55 |
| 1   | 98  | 94  | 90  | 87  | 90 | 87 | 84 | 81 | 73 | 71 | 69 | 61 | 59 | 58 | 50 | 49 | 48 |
| 2   | 90  | 83  | 77  | 72  | 82 | 76 | 71 | 67 | 65 | 61 | 58 | 54 | 51 | 49 | 44 | 42 | 41 |
| 3   | 82  | 73  | 66  | 60  | 75 | 68 | 61 | 57 | 58 | 53 | 49 | 48 | 45 | 42 | 40 | 37 | 35 |
| 4   | 75  | 65  | 57  | 51  | 69 | 60 | 54 | 48 | 51 | 46 | 42 | 43 | 40 | 36 | 36 | 33 | 31 |
| 5   | 69  | 58  | 50  | 44  | 64 | 54 | 47 | 42 | 46 | 41 | 37 | 39 | 35 | 32 | 32 | 29 | 27 |
| 6   | 64  | 52  | 44  | 39  | 59 | 49 | 42 | 37 | 42 | 36 | 32 | 35 | 31 | 28 | 30 | 26 | 24 |
| 7   | 59  | 47  | 40  | 34  | 55 | 44 | 37 | 32 | 38 | 33 | 29 | 32 | 28 | 25 | 27 | 24 | 22 |
| 8   | 55  | 43  | 36  | 30  | 51 | 40 | 33 | 29 | 35 | 29 | 26 | 30 | 26 | 23 | 25 | 22 | 20 |
| 9   | 51  | 39  | 32  | 27  | 47 | 37 | 30 | 26 | 32 | 27 | 23 | 27 | 23 | 20 | 23 | 20 | 18 |
| 10  | 48  | 36  | 29  | 24  | 44 | 34 | 28 | 23 | 30 | 24 | 21 | 25 | 21 | 19 | 22 | 18 | 16 |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°   | 45°  | 90°  |
|-----|------|------|------|
| 0°  | 1680 | 1680 | 1680 |
| 5°  | 1682 | 1652 | 1663 |
| 10° | 1664 | 1619 | 1609 |
| 15° | 1640 | 1564 | 1525 |
| 20° | 1609 | 1489 | 1421 |
| 25° | 1576 | 1406 | 1322 |
| 30° | 1534 | 1320 | 1196 |
| 35° | 1492 | 1228 | 1085 |
| 40° | 1449 | 1133 | 958  |
| 45° | 1399 | 1028 | 843  |
| 50° | 1348 | 922  | 731  |
| 55° | 1294 | 808  | 623  |
| 60° | 1232 | 690  | 513  |
| 65° | 1160 | 570  | 461  |
| 70° | 1073 | 458  | 416  |
| 75° | 964  | 401  | 377  |
| 80° | 805  | 333  | 326  |
| 85° | 546  | 217  | 241  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1399 cd/sqm

TEST NUMBER: P921320

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US940-RLLFLL

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 138.2  | 2.2       |
| 10°-20°   | 379.3  | 6.1       |
| 20°-30°   | 532.5  | 8.6       |
| 30°-40°   | 580.5  | 9.4       |
| 40°-50°   | 533.5  | 8.6       |
| 50°-60°   | 419.0  | 6.8       |
| 60°-70°   | 272.7  | 4.4       |
| 70°-80°   | 140.4  | 2.3       |
| 80°-90°   | 39.0   | 0.6       |
| 90°-100°  | 69.8   | 1.1       |
| 100°-110° | 221.8  | 3.6       |
| 110°-120° | 379.5  | 6.1       |
| 120°-130° | 499.2  | 8.1       |
| 130°-140° | 560.3  | 9.1       |
| 140°-150° | 549.4  | 8.9       |
| 150°-160° | 460.9  | 7.4       |
| 160°-170° | 305.7  | 4.9       |
| 170°-180° | 106.8  | 1.7       |
| 0°-30°    | 1049.9 | 17.0      |
| 0°-40°    | 1630.4 | 26.3      |
| 0°-60°    | 2582.9 | 41.7      |
| 0°-90°    | 3035.0 | 49.0      |
| 90°-120°  | 671.2  | 10.8      |
| 90°-150°  | 2280.1 | 36.8      |
| 90°-180°  | 3153.0 | 50.9      |
| 0°-180°   | 6188.5 | 100.0     |

**CANDELA DISTRIBUTION:**

|      | 0°   | 22.5° | 45°  | 67.5° | 90°  | Flux |
|------|------|-------|------|-------|------|------|
| 0°   | 1474 | 1474  | 1474 | 1474  | 1474 |      |
| 5°   | 1474 | 1468  | 1450 | 1462  | 1458 | 140  |
| 15°  | 1402 | 1387  | 1342 | 1317  | 1304 | 395  |
| 25°  | 1273 | 1230  | 1142 | 1087  | 1067 | 585  |
| 35°  | 1097 | 1029  | 911  | 827   | 798  | 686  |
| 45°  | 896  | 807   | 667  | 572   | 540  | 692  |
| 55°  | 682  | 578   | 434  | 354   | 328  | 609  |
| 65°  | 460  | 352   | 232  | 187   | 183  | 456  |
| 75°  | 245  | 152   | 107  | 97    | 96   | 260  |
| 85°  | 57   | 29    | 25   | 25    | 25   | 66   |
| 90°  | 1    | 12    | 33   | 31    | 32   | 6    |
| 95°  | 50   | 59    | 61   | 61    | 59   | 55   |
| 105° | 205  | 207   | 210  | 211   | 211  | 216  |
| 115° | 381  | 386   | 385  | 384   | 381  | 377  |
| 125° | 554  | 562   | 560  | 557   | 556  | 495  |
| 135° | 717  | 727   | 729  | 728   | 725  | 554  |
| 145° | 870  | 877   | 882  | 883   | 880  | 544  |
| 155° | 995  | 998   | 1000 | 1005  | 1002 | 458  |
| 165° | 1082 | 1081  | 1081 | 1088  | 1083 | 305  |
| 175° | 1126 | 1123  | 1121 | 1128  | 1122 | 107  |
| 180° | 1128 | 1128  | 1128 | 1128  | 1128 |      |

TEST NUMBER: P921320

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US940-RLLFLL

**CANDELA DISTRIBUTION (FULL):**

|        | 0°     | 22.5°  | 45°    | 67.5°  | 90°    |
|--------|--------|--------|--------|--------|--------|
| 0°     | 1474.2 | 1474.2 | 1474.2 | 1474.2 | 1474.2 |
| 2.5°   | 1480.9 | 1474.2 | 1459.5 | 1472.9 | 1470.2 |
| 5°     | 1474.2 | 1467.5 | 1450.1 | 1462.1 | 1458.2 |
| 7.5°   | 1462.1 | 1454.2 | 1435.6 | 1440.7 | 1434.1 |
| 10°    | 1446.2 | 1436.8 | 1410.2 | 1406.0 | 1398.2 |
| 12.5°  | 1426.2 | 1414.2 | 1378.0 | 1370.1 | 1355.4 |
| 15°    | 1402.1 | 1387.4 | 1342.1 | 1316.8 | 1303.5 |
| 17.5°  | 1374.1 | 1352.7 | 1296.6 | 1267.4 | 1246.0 |
| 20°    | 1342.1 | 1315.4 | 1248.7 | 1215.4 | 1186.0 |
| 22.5°  | 1307.4 | 1276.8 | 1199.3 | 1154.0 | 1134.1 |
| 25°    | 1272.7 | 1230.0 | 1141.9 | 1087.4 | 1067.2 |
| 27.5°  | 1231.5 | 1186.0 | 1088.6 | 1025.9 | 995.1  |
| 30°    | 1187.4 | 1136.6 | 1029.8 | 961.9  | 925.9  |
| 32.5°  | 1144.7 | 1083.2 | 973.9  | 893.9  | 860.4  |
| 35°    | 1096.7 | 1028.6 | 911.2  | 827.2  | 797.7  |
| 37.5°  | 1050.0 | 976.5  | 852.5  | 760.4  | 727.1  |
| 40°    | 1000.6 | 920.6  | 791.1  | 696.4  | 661.7  |
| 42.5°  | 949.8  | 864.5  | 729.8  | 631.0  | 597.7  |
| 45°    | 896.5  | 807.1  | 667.1  | 572.3  | 540.3  |
| 47.5°  | 845.9  | 751.2  | 607.1  | 512.3  | 483.0  |
| 50°    | 789.8  | 695.1  | 548.3  | 456.2  | 428.3  |
| 52.5°  | 735.0  | 635.0  | 492.3  | 404.2  | 378.9  |
| 55°    | 681.7  | 577.6  | 433.5  | 353.6  | 328.2  |
| 57.5°  | 627.1  | 520.3  | 381.6  | 306.8  | 285.5  |
| 60°    | 571.0  | 464.2  | 326.8  | 258.9  | 237.6  |
| 62.5°  | 516.4  | 409.7  | 280.1  | 216.2  | 205.5  |
| 65°    | 460.3  | 352.1  | 232.1  | 186.8  | 182.7  |
| 67.5°  | 407.0  | 298.8  | 186.8  | 164.1  | 160.1  |
| 70°    | 350.9  | 246.8  | 154.7  | 141.4  | 136.0  |
| 72.5°  | 297.6  | 198.8  | 129.4  | 118.8  | 116.1  |
| 75°    | 245.4  | 152.0  | 106.7  | 97.4   | 96.1   |
| 77.5°  | 193.5  | 108.0  | 84.1   | 78.7   | 76.0   |
| 80°    | 145.3  | 77.4   | 63.9   | 58.8   | 58.8   |
| 82.5°  | 101.4  | 52.1   | 44.1   | 41.3   | 41.3   |
| 85°    | 57.3   | 29.3   | 25.3   | 25.3   | 25.3   |
| 87.5°  | 21.4   | 10.6   | 10.6   | 9.4    | 9.4    |
| 90°    | 1.0    | 12.2   | 33.3   | 31.3   | 32.3   |
| 92.5°  | 21.0   | 28.5   | 29.6   | 30.6   | 30.6   |
| 95°    | 49.7   | 59.2   | 60.9   | 60.9   | 59.2   |
| 97.5°  | 82.7   | 91.5   | 95.2   | 95.2   | 95.2   |
| 100°   | 120.7  | 128.6  | 131.3  | 131.3  | 130.3  |
| 102.5° | 160.9  | 166.7  | 170.4  | 171.4  | 170.4  |
| 105°   | 204.7  | 207.4  | 209.5  | 211.2  | 211.2  |
| 107.5° | 248.3  | 252.4  | 252.4  | 253.0  | 248.3  |
| 110°   | 290.4  | 295.9  | 295.9  | 295.9  | 293.2  |

TEST NUMBER: P921320

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US940-RLLFLL

**CANDELA DISTRIBUTION (continued):**

|        | 0°     | 22.5°  | 45°    | 67.5°  | 90°    |
|--------|--------|--------|--------|--------|--------|
| 112.5° | 336.0  | 341.8  | 340.7  | 338.0  | 336.0  |
| 115°   | 380.8  | 386.4  | 384.6  | 383.6  | 380.8  |
| 117.5° | 425.4  | 432.9  | 428.2  | 425.4  | 422.8  |
| 120°   | 470.4  | 477.8  | 470.4  | 470.4  | 467.3  |
| 122.5° | 511.1  | 520.7  | 515.9  | 513.2  | 511.1  |
| 125°   | 554.0  | 562.5  | 559.8  | 556.7  | 555.7  |
| 127.5° | 595.8  | 606.4  | 602.6  | 598.5  | 595.8  |
| 130°   | 634.9  | 647.2  | 645.5  | 643.5  | 639.7  |
| 132.5° | 678.8  | 688.3  | 689.0  | 684.2  | 681.5  |
| 135°   | 716.6  | 727.1  | 729.2  | 728.1  | 725.4  |
| 137.5° | 758.8  | 767.2  | 768.9  | 768.2  | 764.2  |
| 140°   | 795.8  | 804.3  | 809.0  | 809.0  | 805.3  |
| 142.5° | 833.9  | 842.4  | 845.1  | 846.1  | 842.4  |
| 145°   | 870.0  | 876.7  | 882.2  | 883.2  | 879.5  |
| 147.5° | 902.2  | 910.7  | 914.8  | 916.5  | 912.8  |
| 150°   | 935.6  | 941.4  | 945.1  | 948.2  | 945.1  |
| 152.5° | 965.2  | 970.9  | 975.7  | 979.5  | 975.7  |
| 155°   | 994.7  | 997.5  | 1000.5 | 1005.3 | 1002.2 |
| 157.5° | 1020.3 | 1022.3 | 1024.0 | 1030.8 | 1026.0 |
| 160°   | 1043.0 | 1045.1 | 1046.1 | 1051.9 | 1047.8 |
| 162.5° | 1064.1 | 1064.1 | 1065.1 | 1071.6 | 1066.8 |
| 165°   | 1082.2 | 1081.1 | 1081.1 | 1087.9 | 1083.2 |
| 167.5° | 1098.5 | 1095.4 | 1095.4 | 1102.2 | 1097.4 |
| 170°   | 1110.7 | 1108.0 | 1107.0 | 1113.7 | 1108.0 |
| 172.5° | 1119.2 | 1116.5 | 1115.4 | 1122.3 | 1116.5 |
| 175°   | 1126.1 | 1123.3 | 1121.2 | 1128.0 | 1122.3 |
| 177.5° | 1129.8 | 1127.0 | 1125.0 | 1130.8 | 1125.0 |
| 180°   | 1128.0 | 1128.0 | 1128.0 | 1128.0 | 1128.0 |

TEST NUMBER: P921320

CATALOG NUMBER: DFN2DIP-4P3F0-040D040US940-RLLFLL

**CIE UGR TABLE:**

| Reflectances:   |      |                  |       |       |       |       |                |      |      |      |       |
|-----------------|------|------------------|-------|-------|-------|-------|----------------|------|------|------|-------|
| Ceiling         |      | 0.7              | 0.7   | 0.5   | 0.5   | 0.3   | 0.7            | 0.7  | 0.5  | 0.5  | 0.3   |
| Wall            |      | 0.5              | 0.3   | 0.5   | 0.3   | 0.3   | 0.5            | 0.3  | 0.5  | 0.3  | 0.3   |
| Reference plane |      | 0.2              | 0.2   | 0.2   | 0.2   | 0.2   | 0.2            | 0.2  | 0.2  | 0.2  | 0.2   |
| Room dimensions |      | Viewed crosswise |       |       |       |       | Viewed endwise |      |      |      |       |
| X=2H            | Y=2H | 8.82             | 9.65  | 9.80  | 10.63 | 11.92 | 4.78           | 5.61 | 5.76 | 6.59 | 7.87  |
|                 | 3H   | 10.50            | 11.23 | 11.48 | 12.22 | 13.53 | 5.97           | 6.70 | 6.95 | 7.69 | 9.00  |
|                 | 4H   | 11.10            | 11.80 | 12.10 | 12.79 | 14.11 | 6.41           | 7.11 | 7.41 | 8.10 | 9.42  |
|                 | 6H   | 11.52            | 12.16 | 12.53 | 13.16 | 14.49 | 6.73           | 7.37 | 7.73 | 8.37 | 9.70  |
|                 | 8H   | 11.64            | 12.25 | 12.66 | 13.27 | 14.59 | 6.81           | 7.42 | 7.83 | 8.44 | 9.76  |
|                 | 12H  | 11.70            | 12.28 | 12.72 | 13.29 | 14.64 | 6.85           | 7.43 | 7.87 | 8.44 | 9.79  |
| 4H              | 2H   | 8.84             | 9.53  | 9.84  | 10.53 | 11.85 | 5.38           | 6.07 | 6.38 | 7.07 | 8.38  |
|                 | 3H   | 10.66            | 11.24 | 11.67 | 12.26 | 13.60 | 6.72           | 7.30 | 7.73 | 8.32 | 9.65  |
|                 | 4H   | 11.35            | 11.88 | 12.37 | 12.90 | 14.25 | 7.26           | 7.79 | 8.28 | 8.81 | 10.16 |
|                 | 6H   | 11.86            | 12.31 | 12.89 | 13.35 | 14.71 | 7.67           | 8.13 | 8.70 | 9.17 | 10.52 |
|                 | 8H   | 12.03            | 12.46 | 13.06 | 13.49 | 14.86 | 7.80           | 8.22 | 8.83 | 9.25 | 10.62 |
|                 | 12H  | 12.13            | 12.51 | 13.17 | 13.56 | 14.93 | 7.86           | 8.24 | 8.91 | 9.29 | 10.66 |
| 8H              | 4H   | 11.32            | 11.74 | 12.35 | 12.77 | 14.14 | 7.54           | 7.96 | 8.57 | 8.99 | 10.36 |
|                 | 6H   | 11.88            | 12.23 | 12.93 | 13.30 | 14.66 | 8.05           | 8.40 | 9.10 | 9.47 | 10.84 |
|                 | 8H   | 12.09            | 12.40 | 13.15 | 13.46 | 14.84 | 8.23           | 8.54 | 9.30 | 9.60 | 10.98 |
|                 | 12H  | 12.23            | 12.50 | 13.29 | 13.55 | 14.97 | 8.35           | 8.62 | 9.41 | 9.67 | 11.10 |
| 12H             | 4H   | 11.27            | 11.65 | 12.32 | 12.70 | 14.07 | 7.54           | 7.92 | 8.59 | 8.97 | 10.34 |
|                 | 6H   | 11.85            | 12.16 | 12.91 | 13.22 | 14.60 | 8.10           | 8.40 | 9.16 | 9.46 | 10.85 |
|                 | 8H   | 12.07            | 12.34 | 13.13 | 13.39 | 14.82 | 8.30           | 8.57 | 9.37 | 9.62 | 11.05 |