

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918838

Luminaire Tested: DFN2DIP-HX2F0-040D050US935-FLLFLL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P918838  
REPORT IS A COMBINATION OF REPORTS P899185 AND P896039  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-HX2F0-040D050US935-FLLFLL  
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7219.4 lumens  
Efficiency: N/A  
Efficacy: 96.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')  
CIE Type: General Diffuse

Input Watts (W): 74.5  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: 0.9933  
Total Harmonic Distortion (THDi): 0.066  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P918838  
CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLFLL

### Luminous Intensity Polar Plot

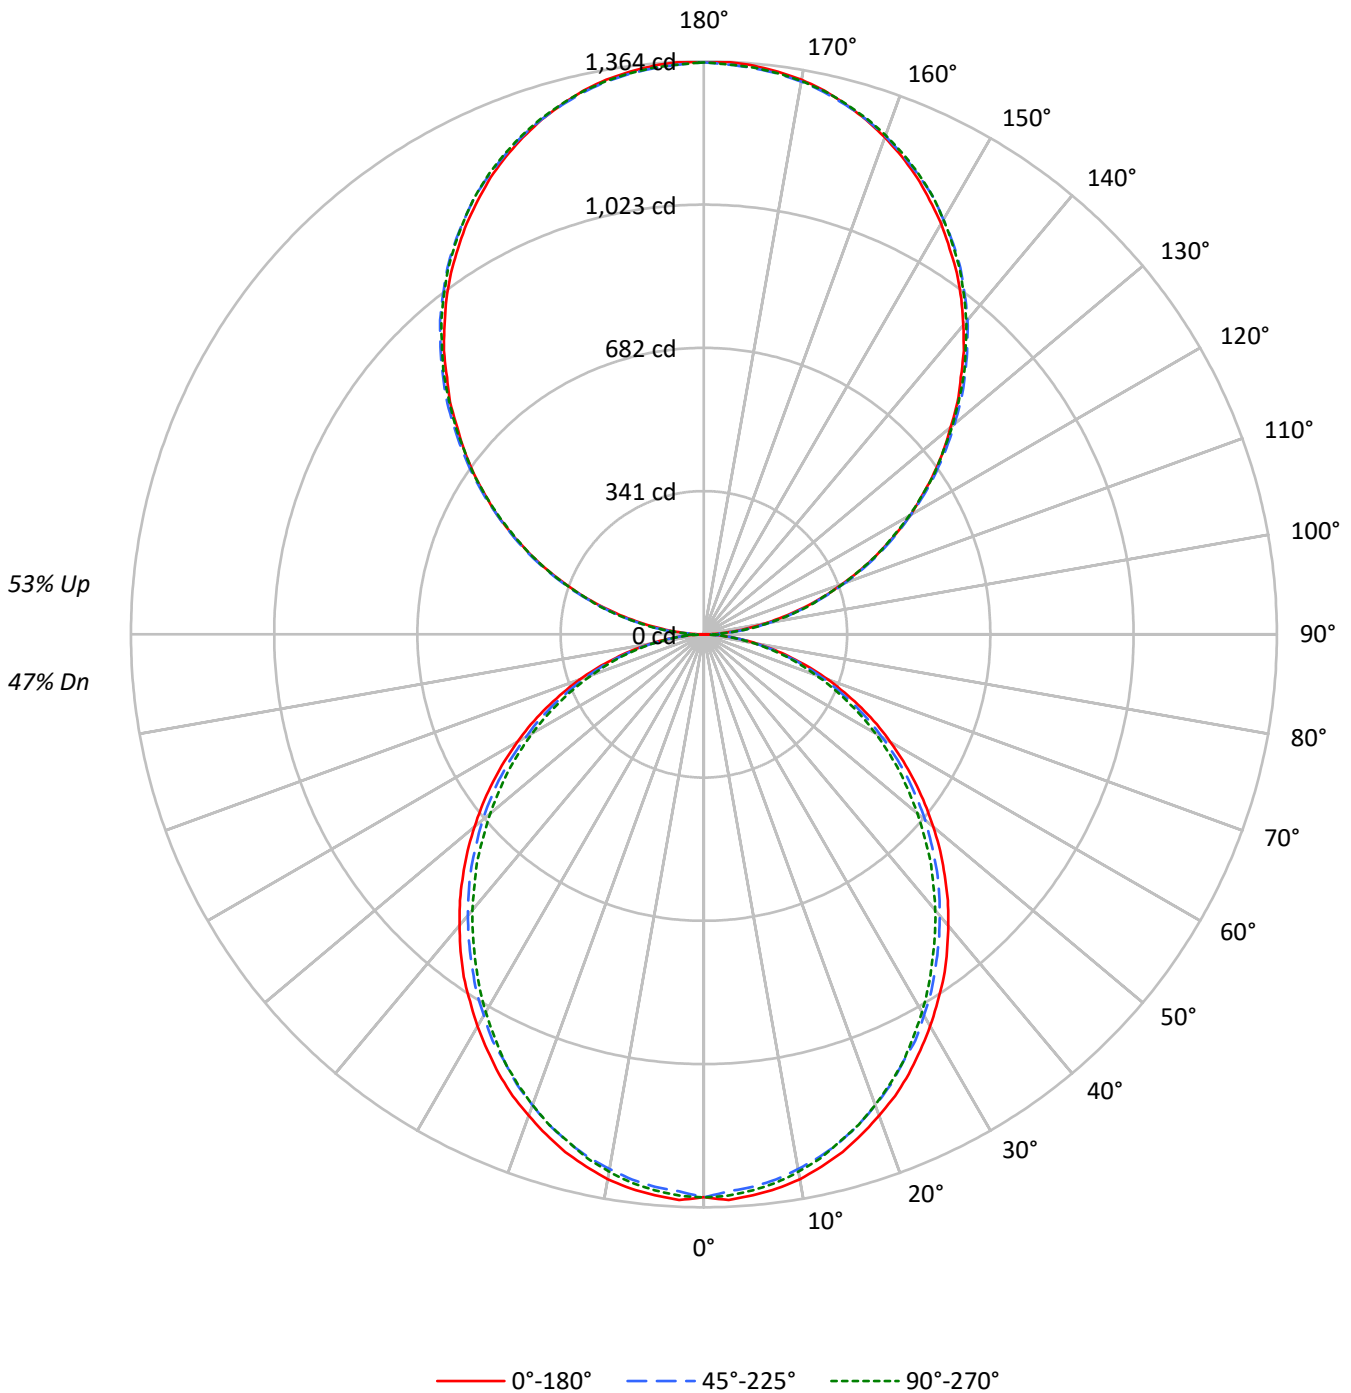



TEST NUMBER: P918838

CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54	47	47	47	47
1	97	93	89	85	89	85	82	79	72	69	67	59	57	56	47	46	45	40	40	40	40
2	88	81	75	70	81	75	69	65	63	59	56	52	49	47	42	40	38	33	33	33	33
3	81	71	64	58	74	66	59	54	55	51	47	46	42	39	37	35	32	28	28	28	28
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28	24	24	24	24
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	24	21	21	21	21
6	62	50	42	37	57	47	40	34	40	34	30	33	29	26	27	24	21	19	19	19	19
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	21	19	16	16	16	16
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	19	17	15	15	15	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13	13	13	13
10	47	35	27	23	43	32	26	21	28	22	19	23	19	16	19	16	14	12	12	12	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3157	3157	3157
5°	3157	3106	3129
10°	3127	3057	3080
15°	3076	2999	3009
20°	3009	2921	2935
25°	2942	2830	2851
30°	2859	2745	2746
35°	2780	2646	2635
40°	2685	2545	2529
45°	2588	2444	2420
50°	2483	2337	2295
55°	2373	2215	2178
60°	2247	2070	2045
65°	2109	1918	1888
70°	1934	1734	1716
75°	1695	1513	1551
80°	1403	1231	1252
85°	953	773	774

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2588 cd/sqm



TEST NUMBER: P918838

CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	126.1	1.7
10°-20°	354.9	4.9
20°-30°	521.5	7.2
30°-40°	605.7	8.4
40°-50°	605.0	8.4
50°-60°	527.5	7.3
60°-70°	389.9	5.4
70°-80°	220.6	3.1
80°-90°	62.1	0.9
90°-100°	84.2	1.2
100°-110°	267.7	3.7
110°-120°	458.1	6.3
120°-130°	602.5	8.3
130°-140°	676.3	9.4
140°-150°	663.1	9.2
150°-160°	556.3	7.7
160°-170°	368.9	5.1
170°-180°	128.9	1.8
0°-30°	1002.5	13.9
0°-40°	1608.3	22.3
0°-60°	2740.7	38.0
0°-90°	3413.4	47.3
90°-120°	810.0	11.2
90°-150°	2751.9	38.1
90°-180°	3806.0	52.7
0°-180°	7219.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1340	1340	1340	1340	1340	
5°	1340	1335	1321	1331	1329	127
15°	1276	1268	1251	1256	1250	359
25°	1154	1144	1122	1125	1122	531
35°	996	983	963	955	948	622
45°	810	802	782	768	763	626
55°	614	606	590	575	568	548
65°	414	406	393	381	375	409
75°	216	214	207	200	202	231
85°	53	52	50	46	45	59
90°	1	15	40	38	39	7
95°	60	72	73	73	72	67
105°	247	250	253	255	255	261
115°	460	466	464	463	460	455
125°	669	679	676	672	671	598
135°	865	878	880	879	876	669
145°	1050	1058	1065	1066	1061	656
155°	1201	1204	1208	1213	1210	553
165°	1306	1305	1305	1313	1307	368
175°	1359	1356	1353	1362	1354	129
180°	1362	1362	1362	1362	1362	



TEST NUMBER: P918838

CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1340.1	1340.1	1340.1	1340.1	1340.1
2.5°	1347.9	1341.4	1327.2	1340.1	1337.6
5°	1340.1	1335.0	1320.8	1331.0	1328.6
7.5°	1331.0	1323.4	1309.1	1319.6	1317.0
10°	1317.0	1307.9	1292.5	1302.8	1298.9
12.5°	1297.5	1289.9	1274.4	1280.9	1278.2
15°	1275.7	1268.0	1251.2	1256.4	1250.0
17.5°	1248.6	1241.0	1224.2	1230.5	1224.2
20°	1218.9	1211.3	1193.3	1197.0	1192.1
22.5°	1189.4	1177.8	1161.0	1161.0	1158.4
25°	1154.5	1144.3	1122.4	1124.9	1122.4
27.5°	1115.9	1106.8	1090.2	1086.3	1079.9
30°	1077.3	1066.9	1047.7	1043.8	1038.6
32.5°	1036.0	1028.4	1007.7	1000.0	994.7
35°	996.1	983.3	962.6	954.8	948.4
37.5°	951.0	939.3	918.7	909.7	903.3
40°	904.7	894.2	873.6	862.1	857.0
42.5°	859.5	849.1	828.6	815.6	808.0
45°	810.5	801.6	782.1	768.1	762.8
47.5°	762.8	753.8	733.2	719.0	711.4
50°	712.6	706.1	688.1	670.0	663.6
52.5°	663.6	654.6	637.9	623.7	614.7
55°	613.5	605.6	590.2	574.7	568.3
57.5°	563.1	556.7	539.8	524.4	519.3
60°	512.8	507.7	489.7	475.5	471.7
62.5°	463.9	454.9	442.0	429.1	424.0
65°	413.7	405.9	393.0	381.4	375.1
67.5°	362.1	355.6	344.1	335.1	329.9
70°	314.4	309.3	297.6	288.6	283.5
72.5°	265.5	260.3	253.9	244.9	241.0
75°	216.5	214.0	207.4	199.8	202.3
77.5°	172.6	167.5	164.9	161.0	157.2
80°	128.9	127.5	124.9	121.1	118.6
82.5°	87.6	87.6	86.4	81.2	81.2
85°	52.8	51.6	50.3	46.3	45.1
87.5°	23.2	20.7	18.1	14.2	12.8
90°	1.2	14.8	40.2	37.8	39.0
92.5°	25.5	34.4	35.7	36.9	36.9
95°	59.9	71.5	73.4	73.4	71.5
97.5°	99.7	110.4	114.9	114.9	114.9
100°	145.7	155.2	158.4	158.4	157.2
102.5°	194.2	201.1	205.6	206.9	205.6
105°	247.1	250.4	252.9	254.9	254.9
107.5°	299.6	304.5	304.5	305.4	299.6
110°	350.5	357.1	357.1	357.1	353.8



TEST NUMBER: P918838

CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	405.5	412.5	411.3	408.0	405.5
115°	459.7	466.3	464.3	463.0	459.7
117.5°	513.5	522.5	516.8	513.5	510.2
120°	567.7	576.7	567.7	567.7	564.0
122.5°	616.9	628.4	622.7	619.4	616.9
125°	668.7	678.9	675.6	671.9	670.7
127.5°	719.1	731.8	727.4	722.4	719.1
130°	766.4	781.1	779.0	776.6	772.1
132.5°	819.3	830.8	831.6	825.9	822.6
135°	864.9	877.5	880.0	878.8	875.5
137.5°	915.8	926.0	928.1	927.2	922.3
140°	960.4	970.8	976.5	976.5	972.0
142.5°	1006.4	1016.8	1020.0	1021.2	1016.8
145°	1050.0	1058.2	1064.7	1066.0	1061.4
147.5°	1089.0	1099.2	1104.1	1106.2	1101.6
150°	1129.2	1136.2	1140.6	1144.4	1140.6
152.5°	1164.9	1171.9	1177.6	1182.2	1177.6
155°	1200.6	1203.8	1207.5	1213.3	1209.6
157.5°	1231.4	1233.8	1235.9	1244.1	1238.4
160°	1258.9	1261.4	1262.6	1269.5	1264.6
162.5°	1284.4	1284.4	1285.6	1293.4	1287.6
165°	1306.1	1304.8	1304.8	1313.1	1307.3
167.5°	1325.8	1322.1	1322.1	1330.3	1324.6
170°	1340.6	1337.3	1336.1	1344.3	1337.3
172.5°	1350.8	1347.5	1346.3	1354.5	1347.5
175°	1359.1	1355.7	1353.3	1361.5	1354.5
177.5°	1363.6	1360.3	1357.8	1364.8	1357.8
180°	1361.5	1361.5	1361.5	1361.5	1361.5



TEST NUMBER: P918838  
 CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.87	11.71	11.85	12.70	14.01	10.45	11.29	11.43	12.28	13.59
	3H	12.50	13.26	13.50	14.26	15.59	12.04	12.79	13.03	13.80	15.13
	4H	13.07	13.79	14.08	14.79	16.13	12.61	13.33	13.62	14.33	15.67
	6H	13.45	14.11	14.47	15.12	16.47	12.99	13.65	14.01	14.66	16.01
	8H	13.55	14.17	14.57	15.20	16.55	13.09	13.71	14.11	14.74	16.09
	12H	13.59	14.18	14.61	15.20	16.57	13.12	13.72	14.15	14.74	16.11
4H	2H	11.32	12.03	12.33	13.04	14.38	10.98	11.69	11.99	12.70	14.04
	3H	13.15	13.75	14.17	14.78	16.13	12.77	13.36	13.79	14.40	15.75
	4H	13.85	14.39	14.87	15.42	16.79	13.45	14.00	14.48	15.02	16.40
	6H	14.34	14.81	15.38	15.86	17.23	13.94	14.41	14.98	15.46	16.83
	8H	14.47	14.91	15.51	15.95	17.34	14.08	14.51	15.12	15.56	16.94
	12H	14.54	14.93	15.59	15.99	17.38	14.13	14.53	15.19	15.58	16.97
8H	4H	14.03	14.47	15.07	15.51	16.90	13.68	14.12	14.72	15.16	16.55
	6H	14.63	14.99	15.69	16.08	17.46	14.28	14.64	15.34	15.73	17.11
	8H	14.84	15.15	15.91	16.22	17.63	14.48	14.80	15.55	15.87	17.27
	12H	14.95	15.23	16.02	16.29	17.74	14.58	14.86	15.65	15.93	17.37
12H	4H	14.01	14.41	15.07	15.47	16.86	13.67	14.06	14.73	15.12	16.51
	6H	14.66	14.98	15.73	16.04	17.45	14.32	14.63	15.39	15.70	17.11
	8H	14.88	15.16	15.95	16.22	17.67	14.53	14.81	15.61	15.88	17.32