

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921520

Luminaire Tested: DFN2DIP-HX2F0-020D030US940-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921520
REPORT IS A COMBINATION OF REPORTS P899162 AND P896039
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-020D030US940-RLLFLL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3883.4 lumens
Efficiency: N/A
Efficacy: 105.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 37
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921520

CATALOG NUMBER: DFN2DIP-HX2F0-020D030US940-RLLFLL

Luminous Intensity Polar Plot

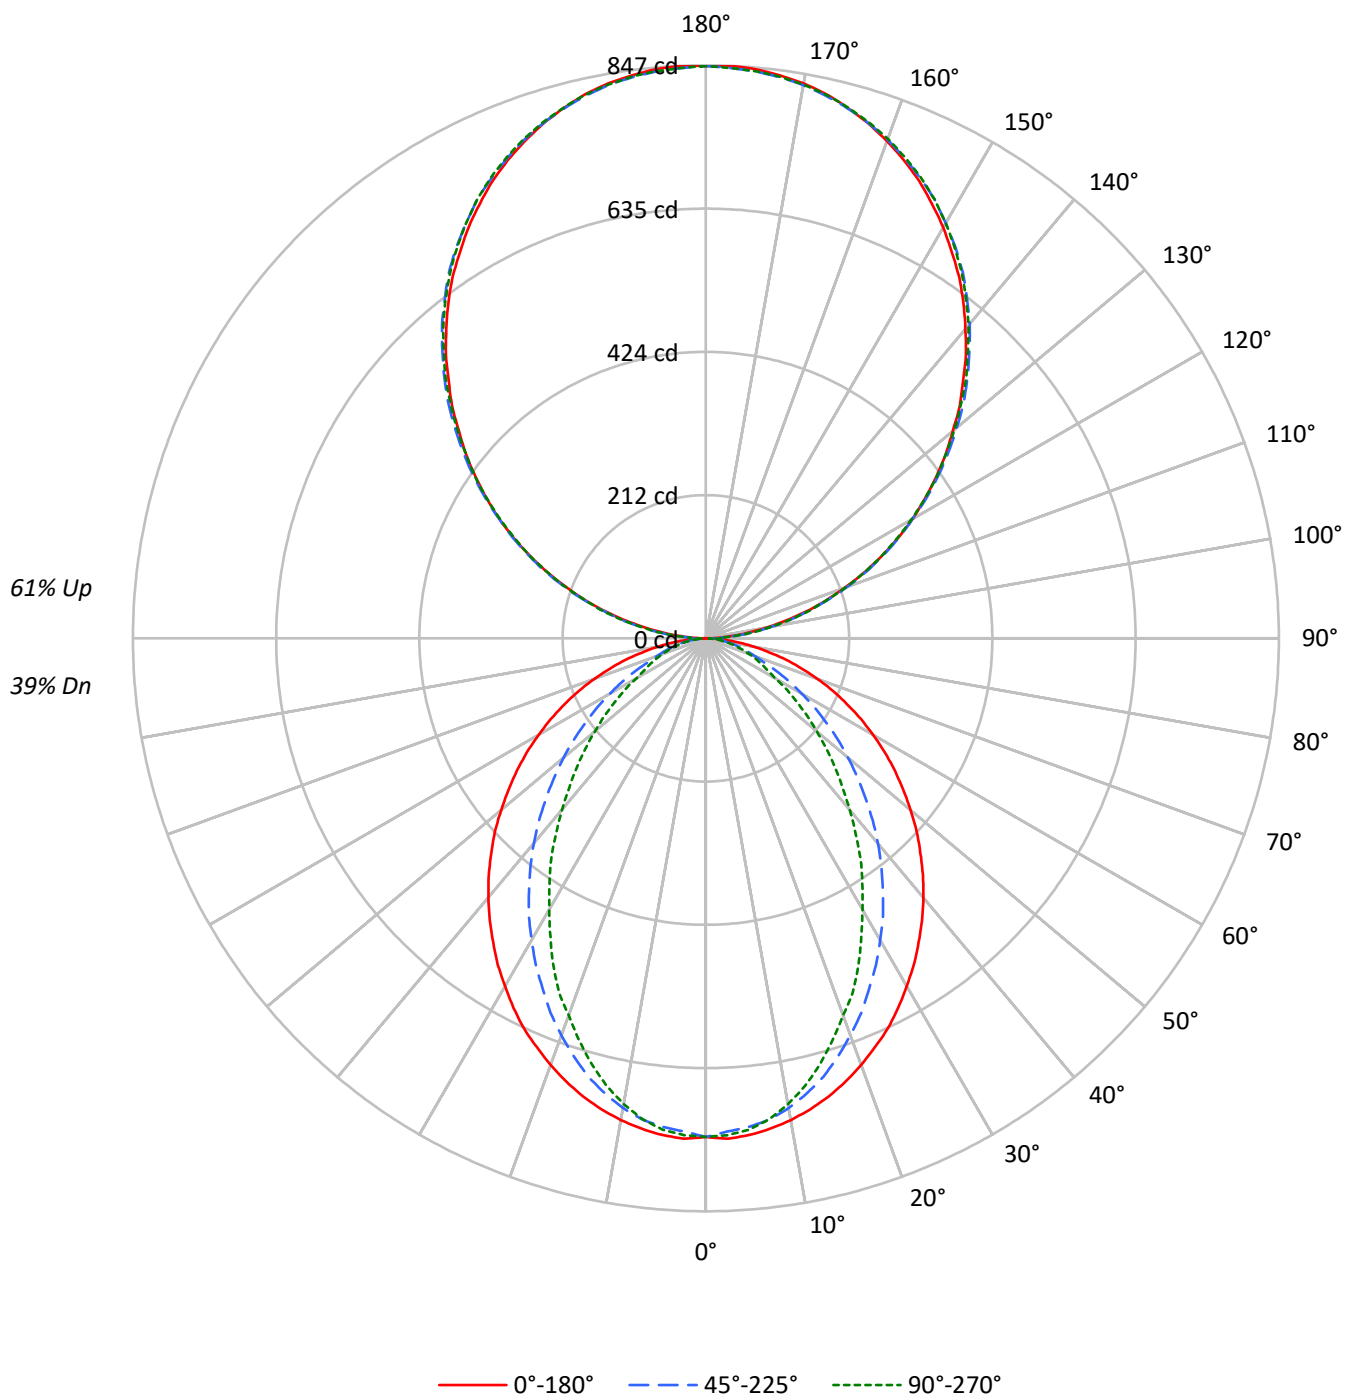

TEST NUMBER: P921520

CATALOG NUMBER: DFN2DIP-HX2F0-020D030US940-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46
1	96	92	88	85	87	83	80	78	68	66	64	54	53	51	41	40	40
2	87	80	75	70	79	73	68	64	60	57	54	48	46	44	37	35	34
3	80	71	64	58	73	65	59	54	53	49	46	43	40	37	33	31	29
4	73	63	55	50	66	58	51	46	48	43	39	38	35	32	30	27	26
5	67	56	48	43	61	52	45	40	43	38	34	35	31	28	27	24	22
6	62	51	43	37	56	46	40	35	39	33	30	31	28	25	25	22	20
7	57	46	38	33	52	42	35	30	35	30	26	29	25	22	22	20	18
8	53	41	34	29	49	38	32	27	32	27	23	26	22	20	21	18	16
9	50	38	31	26	45	35	29	24	29	24	21	24	20	18	19	17	15
10	46	35	28	23	42	32	26	22	27	22	19	22	19	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1737	1737	1737
5°	1737	1705	1717
10°	1717	1667	1658
15°	1690	1608	1569
20°	1656	1529	1460
25°	1622	1440	1355
30°	1576	1349	1224
35°	1530	1253	1108
40°	1484	1153	976
45°	1431	1042	857
50°	1376	931	741
55°	1318	814	629
60°	1251	691	515
65°	1174	567	460
70°	1079	450	412
75°	961	389	369
80°	791	315	309
85°	516	195	218

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1431 cd/sqm

TEST NUMBER: P921520

CATALOG NUMBER: DFN2DIP-HX2F0-020D030US940-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.1	1.8
10°-20°	189.6	4.9
20°-30°	266.3	6.9
30°-40°	290.2	7.5
40°-50°	266.8	6.9
50°-60°	209.5	5.4
60°-70°	136.4	3.5
70°-80°	70.2	1.8
80°-90°	20.3	0.5
90°-100°	52.3	1.3
100°-110°	166.3	4.3
110°-120°	284.7	7.3
120°-130°	374.4	9.6
130°-140°	420.2	10.8
140°-150°	412.1	10.6
150°-160°	345.7	8.9
160°-170°	229.2	5.9
170°-180°	80.1	2.1
0°-30°	525.0	13.5
0°-40°	815.2	21.0
0°-60°	1291.4	33.3
0°-90°	1518.3	39.1
90°-120°	503.4	13.0
90°-150°	1710.0	44.0
90°-180°	2365.0	60.9
0°-180°	3883.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	737	737	737	737	737	
5°	737	734	725	731	729	70
15°	701	694	671	658	652	198
25°	636	615	571	544	534	293
35°	548	514	456	414	399	343
45°	448	404	334	286	270	346
55°	341	289	217	177	164	305
65°	230	176	116	94	91	228
75°	123	76	53	49	48	130
85°	29	15	13	13	13	33
90°	1	9	25	24	24	4
95°	37	44	46	46	44	41
105°	154	156	157	158	158	162
115°	286	290	288	288	286	283
125°	416	422	420	418	417	371
135°	537	545	547	546	544	415
145°	652	658	662	662	660	408
155°	746	748	750	754	752	343
165°	812	811	811	816	812	229
175°	844	842	841	846	842	80
180°	846	846	846	846	846	

TEST NUMBER: P921520

CATALOG NUMBER: DFN2DIP-HX2F0-020D030US940-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	737.1	737.1	737.1	737.1	737.1
2.5°	740.4	737.1	729.7	736.5	735.1
5°	737.1	733.8	725.0	731.1	729.1
7.5°	731.1	727.1	717.7	720.4	717.0
10°	723.1	718.4	705.1	703.0	699.1
12.5°	713.1	707.0	689.0	685.1	677.7
15°	701.1	693.7	671.0	658.3	651.8
17.5°	687.1	676.4	648.4	633.6	623.0
20°	671.0	657.6	624.4	607.7	593.0
22.5°	653.7	638.4	599.7	577.0	567.0
25°	636.4	615.0	571.0	543.7	533.6
27.5°	615.7	593.0	544.3	512.9	497.6
30°	593.7	568.3	515.0	481.0	462.9
32.5°	572.3	541.6	487.0	446.9	430.3
35°	548.3	514.3	455.7	413.6	398.9
37.5°	524.9	488.2	426.2	380.2	363.6
40°	500.2	460.3	395.6	348.2	330.8
42.5°	474.9	432.3	364.9	315.5	298.9
45°	448.3	403.5	333.6	286.1	270.1
47.5°	422.9	375.6	303.5	256.1	241.5
50°	394.9	347.6	274.2	228.1	214.2
52.5°	367.5	317.4	246.1	202.2	189.5
55°	340.8	288.8	216.8	176.8	164.1
57.5°	313.5	260.1	190.8	153.5	142.8
60°	285.5	232.1	163.5	129.5	118.8
62.5°	258.2	204.8	140.1	108.1	102.7
65°	230.2	176.1	116.1	93.5	91.4
67.5°	203.5	149.4	93.5	82.0	80.1
70°	175.4	123.4	77.3	70.7	68.0
72.5°	148.7	99.3	64.6	59.4	58.1
75°	122.7	76.0	53.3	48.7	48.1
77.5°	96.8	54.0	42.0	39.3	38.0
80°	72.7	38.7	32.0	29.3	29.3
82.5°	50.6	26.0	22.0	20.7	20.7
85°	28.6	14.6	12.7	12.7	12.7
87.5°	10.7	5.4	5.4	4.6	4.6
90°	0.8	9.2	25.0	23.5	24.3
92.5°	15.8	21.4	22.2	22.9	22.9
95°	37.3	44.4	45.7	45.7	44.4
97.5°	62.0	68.6	71.4	71.4	71.4
100°	90.5	96.4	98.4	98.4	97.7
102.5°	120.6	125.0	127.8	128.6	127.8
105°	153.6	155.6	157.1	158.4	158.4
107.5°	186.2	189.2	189.2	189.8	186.2
110°	217.8	221.9	221.9	221.9	219.9

TEST NUMBER: P921520

CATALOG NUMBER: DFN2DIP-HX2F0-020D030US940-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	252.0	256.4	255.6	253.5	252.0
115°	285.7	289.7	288.5	287.8	285.7
117.5°	319.1	324.7	321.1	319.1	317.0
120°	352.8	358.4	352.8	352.8	350.4
122.5°	383.3	390.5	386.9	384.9	383.3
125°	415.5	421.9	419.8	417.5	416.8
127.5°	446.8	454.8	452.0	448.9	446.8
130°	476.2	485.4	484.1	482.6	479.7
132.5°	509.1	516.2	516.7	513.2	511.1
135°	537.4	545.3	546.9	546.1	544.0
137.5°	569.0	575.4	576.7	576.2	573.1
140°	596.8	603.2	606.8	606.8	604.0
142.5°	625.4	631.8	633.8	634.6	631.8
145°	652.5	657.5	661.6	662.4	659.6
147.5°	676.7	683.1	686.1	687.4	684.6
150°	701.7	706.1	708.8	711.1	708.8
152.5°	723.9	728.2	731.7	734.6	731.7
155°	746.1	748.1	750.4	753.9	751.7
157.5°	765.2	766.7	768.0	773.1	769.5
160°	782.3	783.8	784.6	788.9	785.9
162.5°	798.1	798.1	798.9	803.7	800.1
165°	811.6	810.8	810.8	815.9	812.3
167.5°	823.9	821.5	821.5	826.6	823.0
170°	833.0	831.0	830.3	835.4	831.0
172.5°	839.4	837.4	836.6	841.7	837.4
175°	844.5	842.5	841.0	846.1	841.7
177.5°	847.3	845.3	843.7	848.1	843.7
180°	846.1	846.1	846.1	846.1	846.1

TEST NUMBER: P921520

CATALOG NUMBER: DFN2DIP-HX2F0-020D030US940-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.81	8.56	8.87	9.61	11.04	3.80	4.55	4.85	5.60	7.02
	3H	9.46	10.13	10.52	11.19	12.63	4.97	5.63	6.03	6.70	8.14
	4H	10.05	10.68	11.12	11.74	13.19	5.40	6.03	6.47	7.10	8.54
	6H	10.45	11.03	11.53	12.09	13.55	5.70	6.28	6.78	7.35	8.81
	8H	10.56	11.11	11.64	12.19	13.65	5.78	6.34	6.87	7.42	8.87
	12H	10.61	11.13	11.70	12.21	13.69	5.82	6.34	6.91	7.42	8.89
4H	2H	7.82	8.45	8.90	9.51	10.96	4.37	5.01	5.45	6.07	7.51
	3H	9.61	10.14	10.70	11.23	12.69	5.69	6.22	6.78	7.31	8.77
	4H	10.28	10.76	11.37	11.84	13.33	6.22	6.71	7.31	7.79	9.27
	6H	10.77	11.18	11.87	12.29	13.76	6.62	7.03	7.72	8.14	9.61
	8H	10.93	11.31	12.03	12.41	13.90	6.74	7.12	7.84	8.22	9.71
	12H	11.00	11.35	12.12	12.46	13.96	6.79	7.14	7.90	8.25	9.74
8H	4H	10.24	10.62	11.34	11.72	13.21	6.48	6.87	7.58	7.96	9.45
	6H	10.77	11.09	11.90	12.23	13.72	6.97	7.29	8.09	8.43	9.92
	8H	10.97	11.25	12.10	12.37	13.88	7.15	7.43	8.28	8.55	10.06
	12H	11.09	11.34	12.22	12.45	14.00	7.25	7.50	8.38	8.61	10.16
12H	4H	10.19	10.53	11.30	11.64	13.14	6.48	6.83	7.60	7.94	9.43
	6H	10.75	11.03	11.88	12.15	13.65	7.01	7.29	8.14	8.41	9.92
	8H	10.95	11.19	12.08	12.31	13.85	7.21	7.45	8.34	8.57	10.11

END OF REPORT