

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913520

Luminaire Tested: DFN2DIP-HX3F0-060D070US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913520
REPORT IS A COMBINATION OF REPORTS P899264 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-060D070US927-RLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8947.7 lumens
Efficiency: N/A
Efficacy: 81.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 110.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913520
CATALOG NUMBER: DFN2DIP-HX3F0-060D070US927-RLFL

Luminous Intensity Polar Plot

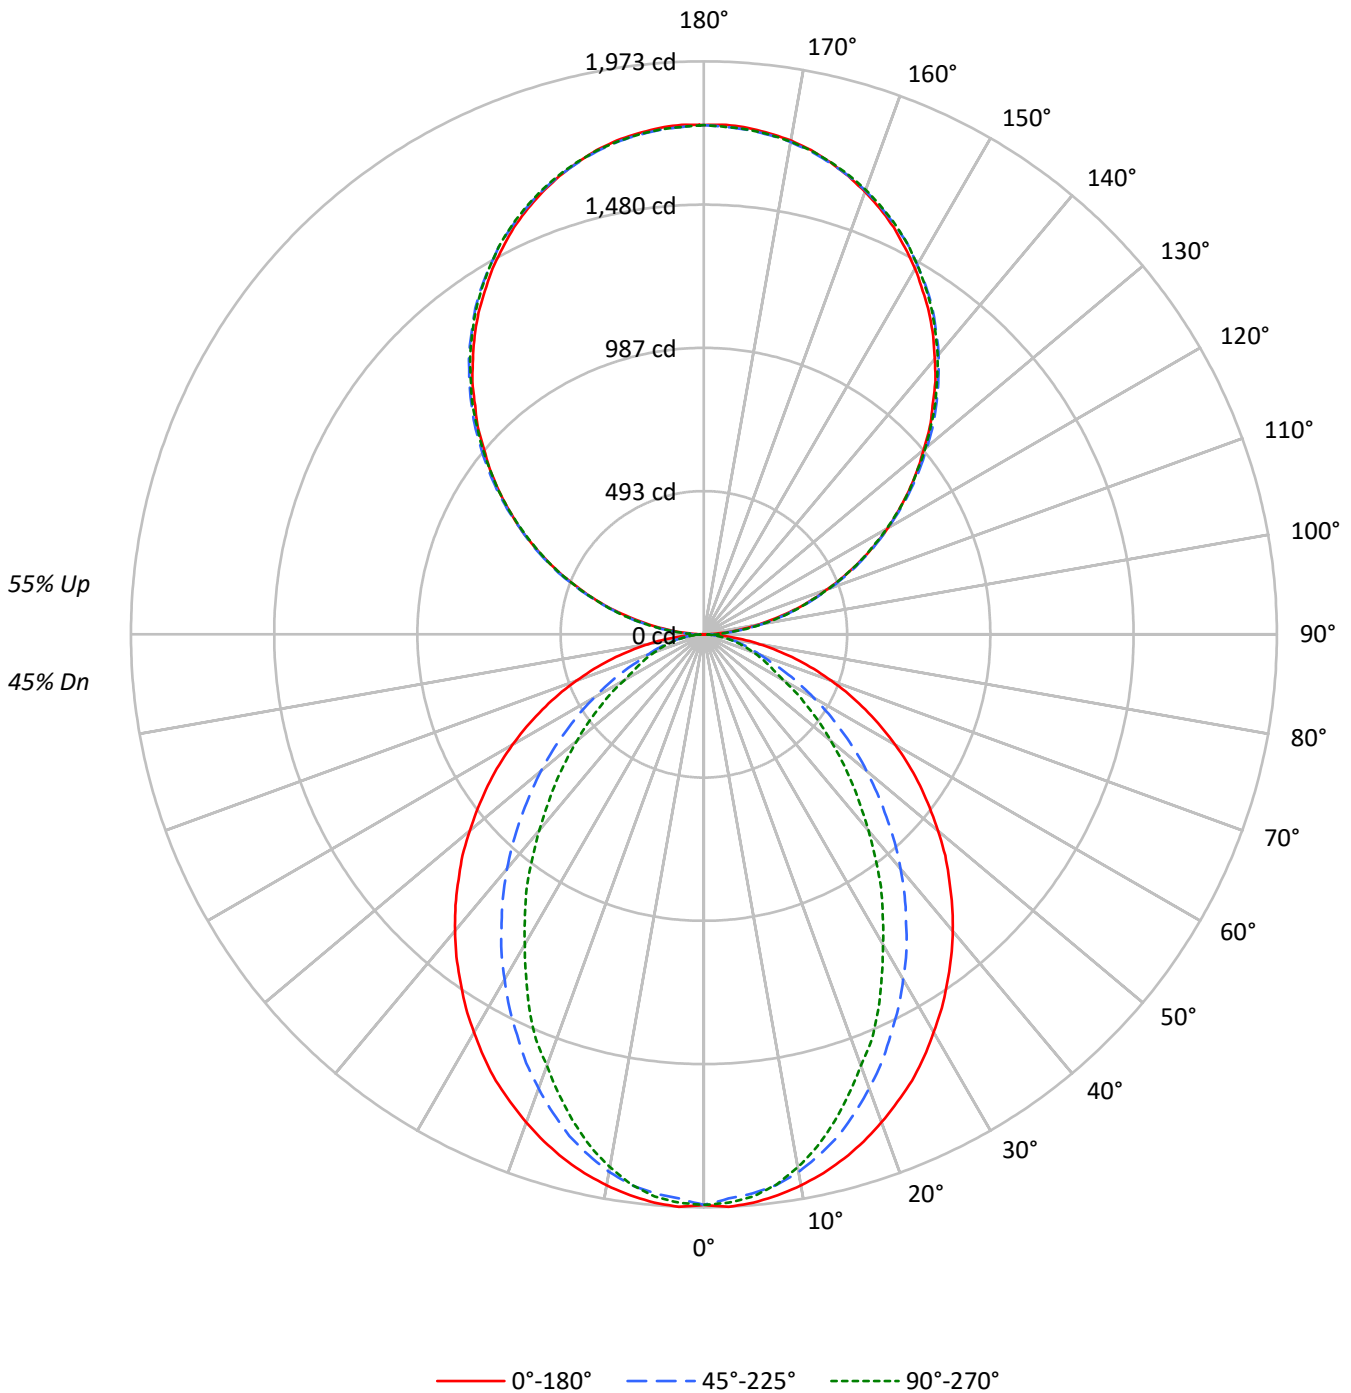



TEST NUMBER: P913520
 CATALOG NUMBER: DFN2DIP-HX3F0-060D070US927-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	45	45	45	45
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44	39	39	39	39
2	89	82	76	71	81	75	70	66	63	59	56	52	49	47	41	40	38	33	33	33	33
3	81	72	65	60	74	67	60	56	56	51	48	46	43	40	37	35	33	29	29	29	29
4	75	64	57	51	68	59	53	47	50	45	41	41	38	35	33	31	29	25	25	25	25
5	69	57	50	44	63	53	46	41	45	40	36	37	33	30	30	28	25	22	22	22	22
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	28	25	23	20	20	20	20
7	59	47	39	34	54	43	36	32	37	32	28	31	27	24	25	22	20	18	18	18	18
8	54	42	35	30	50	39	33	28	34	28	25	28	24	21	23	20	18	16	16	16	16
9	51	39	32	27	47	36	30	25	31	26	22	26	22	19	22	19	17	14	14	14	14
10	47	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15	13	13	13	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2276	2276	2276
5°	2278	2238	2252
10°	2255	2192	2178
15°	2222	2118	2063
20°	2180	2017	1923
25°	2137	1904	1788
30°	2080	1788	1617
35°	2023	1663	1467
40°	1966	1534	1295
45°	1899	1392	1139
50°	1830	1248	987
55°	1758	1094	841
60°	1674	934	691
65°	1578	771	620
70°	1461	619	560
75°	1314	542	507
80°	1101	450	435
85°	753	292	319

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1899 cd/sqm



TEST NUMBER: P913520

CATALOG NUMBER: DFN2DIP-HX3F0-060D070US927-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	184.1	2.1
10°-20°	505.4	5.6
20°-30°	709.6	7.9
30°-40°	773.5	8.6
40°-50°	710.9	7.9
50°-60°	558.3	6.2
60°-70°	363.4	4.1
70°-80°	187.1	2.1
80°-90°	52.7	0.6
90°-100°	108.5	1.2
100°-110°	344.8	3.9
110°-120°	590.1	6.6
120°-130°	776.1	8.7
130°-140°	871.1	9.7
140°-150°	854.2	9.5
150°-160°	716.6	8.0
160°-170°	475.2	5.3
170°-180°	166.1	1.9
0°-30°	1399.1	15.6
0°-40°	2172.6	24.3
0°-60°	3441.9	38.5
0°-90°	4045.1	45.2
90°-120°	1043.4	11.7
90°-150°	3544.8	39.6
90°-180°	4903.0	54.8
0°-180°	8947.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1964	1964	1964	1964	1964	
5°	1964	1956	1932	1948	1943	186
15°	1868	1849	1788	1755	1737	527
25°	1696	1639	1522	1449	1422	780
35°	1461	1371	1214	1102	1063	915
45°	1195	1076	889	763	720	923
55°	908	770	578	471	437	812
65°	613	469	309	249	244	608
75°	327	203	142	130	128	346
85°	76	39	34	34	34	88
90°	2	19	52	49	50	9
95°	77	92	95	95	92	86
105°	318	322	326	328	328	336
115°	592	601	598	596	592	586
125°	861	874	870	866	864	770
135°	1114	1130	1134	1132	1128	861
145°	1352	1363	1372	1373	1367	845
155°	1546	1551	1556	1563	1558	712
165°	1682	1681	1681	1691	1684	475
175°	1751	1746	1743	1754	1745	166
180°	1754	1754	1754	1754	1754	



TEST NUMBER: P913520

CATALOG NUMBER: DFN2DIP-HX3F0-060D070US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1964.5	1964.5	1964.5	1964.5	1964.5
2.5°	1973.3	1964.5	1944.8	1962.7	1959.1
5°	1964.5	1955.6	1932.4	1948.4	1943.1
7.5°	1948.4	1937.8	1913.0	1919.9	1911.1
10°	1927.1	1914.6	1879.2	1873.7	1863.1
12.5°	1900.5	1884.4	1836.4	1825.8	1806.2
15°	1868.4	1848.8	1788.4	1754.7	1736.9
17.5°	1831.1	1802.6	1727.9	1688.9	1660.4
20°	1788.4	1752.8	1664.0	1619.6	1580.4
22.5°	1742.2	1701.3	1598.1	1537.8	1511.2
25°	1696.1	1639.1	1521.8	1449.0	1422.2
27.5°	1641.0	1580.4	1450.6	1367.1	1326.2
30°	1582.3	1514.6	1372.4	1281.8	1233.7
32.5°	1525.3	1443.5	1297.9	1191.1	1146.6
35°	1461.4	1370.7	1214.3	1102.2	1063.0
37.5°	1399.2	1301.2	1136.1	1013.3	968.9
40°	1333.3	1226.8	1054.2	928.0	881.8
42.5°	1265.8	1152.1	972.5	840.8	796.5
45°	1194.7	1075.5	889.0	762.6	719.9
47.5°	1127.2	1001.0	809.0	682.6	643.6
50°	1052.5	926.3	730.7	607.9	570.8
52.5°	979.5	846.1	656.0	538.7	504.9
55°	908.4	769.8	577.7	471.2	437.4
57.5°	835.6	693.3	508.5	408.9	380.4
60°	760.9	618.7	435.5	345.0	316.5
62.5°	688.1	545.9	373.3	288.0	273.9
65°	613.4	469.3	309.3	249.0	243.5
67.5°	542.2	398.2	249.0	218.6	213.3
70°	467.5	328.9	206.1	188.5	181.3
72.5°	396.5	264.8	172.4	158.3	154.6
75°	327.1	202.6	142.2	129.8	128.1
77.5°	257.9	143.9	112.0	104.9	101.3
80°	193.7	103.1	85.2	78.3	78.3
82.5°	135.1	69.4	58.6	55.1	55.1
85°	76.4	39.1	33.7	33.7	33.7
87.5°	28.5	14.2	14.2	12.4	12.4
90°	1.6	19.0	51.8	48.6	50.2
92.5°	32.8	44.4	46.0	47.6	47.6
95°	77.2	92.0	94.7	94.7	92.0
97.5°	128.5	142.2	148.1	148.1	148.1
100°	187.7	199.9	204.1	204.1	202.5
102.5°	250.1	259.0	264.9	266.5	264.9
105°	318.3	322.5	325.7	328.4	328.4
107.5°	386.0	392.3	392.3	393.4	386.0
110°	451.5	460.0	460.0	460.0	455.7



TEST NUMBER: P913520

CATALOG NUMBER: DFN2DIP-HX3F0-060D070US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	522.4	531.4	529.8	525.5	522.4
115°	592.2	600.6	598.0	596.4	592.2
117.5°	661.4	673.0	665.7	661.4	657.2
120°	731.2	742.8	731.2	731.2	726.4
122.5°	794.6	809.5	802.1	797.8	794.6
125°	861.3	874.5	870.3	865.5	864.0
127.5°	926.3	942.7	936.9	930.6	926.3
130°	987.1	1006.1	1003.5	1000.4	994.5
132.5°	1055.3	1070.2	1071.2	1063.8	1059.5
135°	1114.0	1130.4	1133.6	1131.9	1127.7
137.5°	1179.6	1192.8	1195.4	1194.4	1188.0
140°	1237.2	1250.5	1257.8	1257.8	1252.0
142.5°	1296.4	1309.6	1313.8	1315.4	1309.6
145°	1352.5	1363.0	1371.5	1373.1	1367.3
147.5°	1402.7	1415.9	1422.3	1424.9	1419.1
150°	1454.5	1463.5	1469.3	1474.1	1469.3
152.5°	1500.5	1509.5	1516.9	1522.7	1516.9
155°	1546.5	1550.7	1555.5	1562.9	1558.1
157.5°	1586.2	1589.4	1592.0	1602.6	1595.1
160°	1621.6	1624.8	1626.3	1635.3	1629.0
162.5°	1654.4	1654.4	1656.0	1666.0	1658.6
165°	1682.4	1680.8	1680.8	1691.4	1683.9
167.5°	1707.8	1703.0	1703.0	1713.6	1706.2
170°	1726.8	1722.6	1721.0	1731.5	1722.6
172.5°	1740.0	1735.7	1734.2	1744.8	1735.7
175°	1750.6	1746.4	1743.2	1753.7	1744.8
177.5°	1756.4	1752.1	1749.0	1758.0	1749.0
180°	1753.7	1753.7	1753.7	1753.7	1753.7



TEST NUMBER: P913520
 CATALOG NUMBER: DFN2DIP-HX3F0-060D070US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.49	10.29	10.50	11.30	12.64	5.47	6.26	6.47	7.27	8.61
	3H	11.16	11.87	12.17	12.89	14.25	6.65	7.36	7.67	8.38	9.74
	4H	11.76	12.43	12.79	13.45	14.82	7.10	7.77	8.12	8.79	10.16
	6H	12.18	12.79	13.21	13.82	15.20	7.41	8.03	8.45	9.06	10.44
	8H	12.30	12.88	13.34	13.93	15.30	7.50	8.09	8.54	9.13	10.51
	12H	12.35	12.91	13.40	13.95	15.35	7.54	8.10	8.59	9.13	10.53
4H	2H	9.51	10.18	10.54	11.20	12.57	6.06	6.73	7.09	7.75	9.12
	3H	11.32	11.88	12.36	12.93	14.31	7.40	7.96	8.44	9.01	10.39
	4H	12.01	12.52	13.06	13.56	14.96	7.94	8.45	8.99	9.49	10.90
	6H	12.51	12.95	13.57	14.02	15.42	8.35	8.79	9.41	9.86	11.26
	8H	12.68	13.09	13.74	14.15	15.56	8.48	8.89	9.54	9.94	11.36
	12H	12.77	13.14	13.85	14.21	15.63	8.54	8.91	9.61	9.98	11.40
8H	4H	11.97	12.38	13.03	13.44	14.85	8.21	8.62	9.27	9.68	11.09
	6H	12.53	12.86	13.61	13.96	15.38	8.72	9.06	9.80	10.16	11.57
	8H	12.74	13.03	13.83	14.12	15.55	8.91	9.21	10.00	10.29	11.72
	12H	12.87	13.13	13.96	14.21	15.68	9.02	9.29	10.12	10.36	11.84
12H	4H	11.92	12.29	13.00	13.36	14.78	8.21	8.58	9.29	9.66	11.08
	6H	12.50	12.80	13.59	13.88	15.31	8.77	9.07	9.86	10.15	11.58
	8H	12.72	12.98	13.81	14.05	15.53	8.98	9.24	10.07	10.31	11.79