

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924438

Luminaire Tested: DFN2DIP-HX3F0-070D030US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924438
REPORT IS A COMBINATION OF REPORTS P899209 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-070D030US950-FLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9144.1 lumens
Efficiency: N/A
Efficacy: 99.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 92.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924438

CATALOG NUMBER: DFN2DIP-HX3F0-070D030US950-FLLFLL

Luminous Intensity Polar Plot

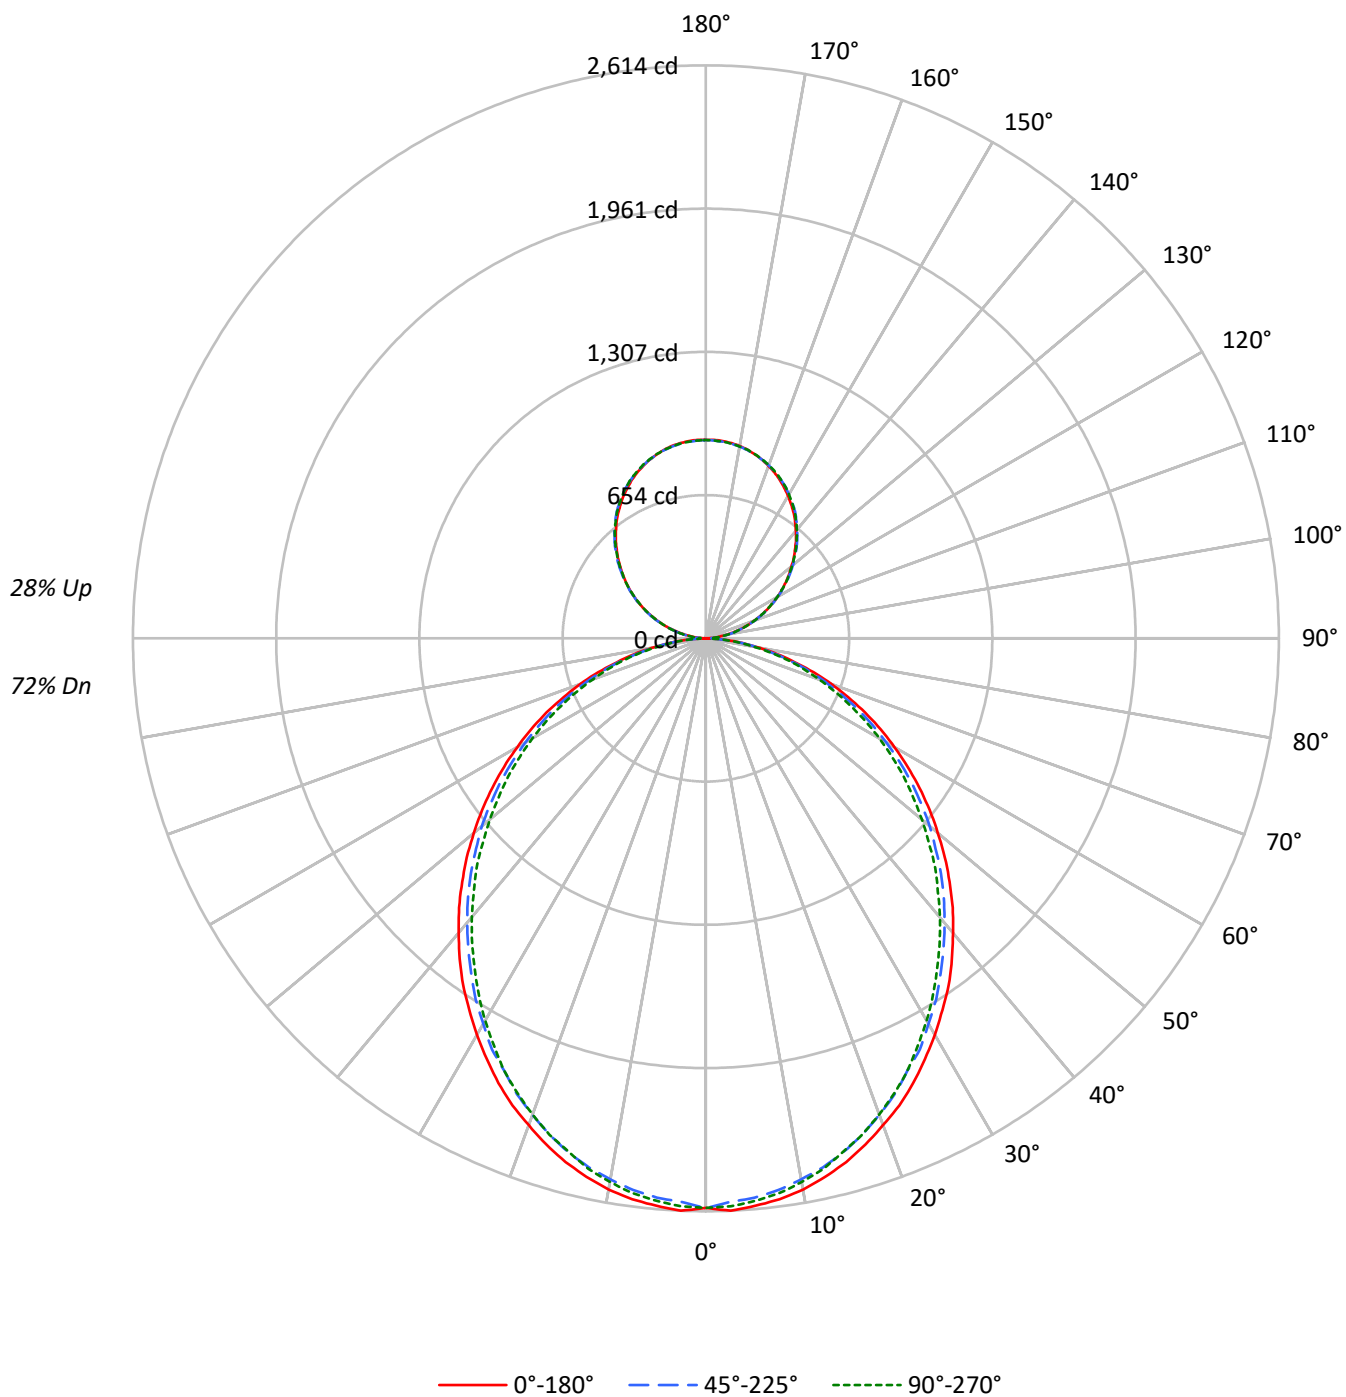

TEST NUMBER: P924438

CATALOG NUMBER: DFN2DIP-HX3F0-070D030US950-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	77	77	77
1	103	98	94	91	97	93	90	87	84	81	79	76	74	72	68	66	65
2	94	86	80	74	89	82	76	71	74	69	65	66	63	60	60	57	55
3	85	76	68	62	81	72	65	60	65	60	55	59	54	51	53	49	46
4	78	67	59	52	74	64	56	51	58	52	47	52	48	44	47	43	40
5	72	60	51	45	68	57	49	44	52	46	41	47	42	38	43	38	35
6	66	54	45	39	63	51	44	38	47	40	36	43	37	33	39	34	31
7	62	49	41	35	58	47	39	34	43	36	32	39	34	30	35	31	27
8	57	44	36	31	54	43	35	30	39	33	28	36	30	26	33	28	25
9	53	41	33	28	51	39	32	27	36	30	25	33	28	24	30	26	22
10	50	37	30	25	47	36	29	24	33	27	23	30	25	22	28	24	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3010	3010	3010
5°	3013	2966	2986
10°	2988	2924	2944
15°	2942	2874	2879
20°	2881	2805	2813
25°	2821	2723	2737
30°	2746	2646	2640
35°	2674	2556	2538
40°	2586	2465	2440
45°	2498	2374	2341
50°	2403	2278	2225
55°	2302	2167	2119
60°	2188	2036	1997
65°	2064	1900	1853
70°	1905	1733	1698
75°	1686	1533	1552
80°	1421	1279	1278
85°	1009	847	829

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2498 cd/sqm

TEST NUMBER: P924438

CATALOG NUMBER: DFN2DIP-HX3F0-070D030US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	244.6	2.7
10°-20°	688.1	7.5
20°-30°	1011.3	11.1
30°-40°	1174.5	12.8
40°-50°	1173.1	12.8
50°-60°	1022.9	11.2
60°-70°	756.1	8.3
70°-80°	427.8	4.7
80°-90°	115.5	1.3
90°-100°	56.0	0.6
100°-110°	178.0	1.9
110°-120°	304.6	3.3
120°-130°	400.5	4.4
130°-140°	449.6	4.9
140°-150°	440.9	4.8
150°-160°	369.8	4.0
160°-170°	245.3	2.7
170°-180°	85.7	0.9
0°-30°	1943.9	21.3
0°-40°	3118.5	34.1
0°-60°	5314.4	58.1
0°-90°	6613.8	72.3
90°-120°	538.5	5.9
90°-150°	1829.5	20.0
90°-180°	2530.0	27.7
0°-180°	9144.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2598	2598	2598	2598	2598	
5°	2598	2589	2561	2581	2576	247
15°	2474	2459	2426	2436	2424	697
25°	2239	2219	2176	2181	2176	1030
35°	1932	1907	1866	1851	1839	1206
45°	1572	1554	1517	1489	1479	1213
55°	1189	1174	1144	1114	1102	1063
65°	802	787	762	740	727	793
75°	420	415	402	387	392	448
85°	102	100	98	90	88	114
90°	1	10	27	25	26	9
95°	40	48	49	49	48	44
105°	164	166	168	169	169	173
115°	306	310	309	308	306	302
125°	445	451	449	447	446	397
135°	575	583	585	584	582	444
145°	698	704	708	709	706	436
155°	798	800	803	807	804	367
165°	868	868	868	873	869	245
175°	904	901	900	905	900	86
180°	905	905	905	905	905	

TEST NUMBER: P924438

CATALOG NUMBER: DFN2DIP-HX3F0-070D030US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2598.4	2598.4	2598.4	2598.4	2598.4
2.5°	2613.6	2601.1	2573.5	2598.4	2593.6
5°	2598.4	2588.7	2561.1	2581.0	2576.2
7.5°	2581.0	2566.1	2538.5	2558.7	2553.7
10°	2553.7	2536.1	2506.2	2526.1	2518.7
12.5°	2516.0	2501.2	2471.2	2483.6	2478.6
15°	2473.6	2458.7	2426.1	2436.2	2423.7
17.5°	2421.1	2406.3	2373.6	2386.1	2373.6
20°	2363.5	2348.7	2313.7	2321.2	2311.4
22.5°	2306.3	2283.8	2251.2	2251.2	2246.1
25°	2238.8	2218.8	2176.5	2181.2	2176.5
27.5°	2163.7	2146.2	2113.9	2106.4	2093.9
30°	2089.0	2068.7	2031.4	2024.0	2013.9
32.5°	2008.8	1994.1	1954.0	1938.9	1928.8
35°	1931.5	1906.6	1866.5	1851.4	1838.9
37.5°	1844.0	1821.5	1781.4	1763.9	1751.4
40°	1754.1	1734.0	1693.9	1671.7	1661.6
42.5°	1666.6	1646.5	1606.7	1581.5	1566.7
45°	1571.7	1554.3	1516.6	1489.3	1479.2
47.5°	1479.2	1461.7	1421.7	1394.1	1379.3
50°	1381.7	1369.2	1334.2	1299.3	1286.8
52.5°	1286.8	1269.3	1237.0	1209.4	1191.8
55°	1189.4	1174.4	1144.4	1114.5	1102.0
57.5°	1091.9	1079.5	1046.8	1016.9	1006.9
60°	994.4	984.5	949.6	922.0	914.6
62.5°	899.4	882.0	857.1	832.2	822.1
65°	802.2	787.0	762.2	739.6	727.1
67.5°	702.2	689.6	667.2	649.8	639.7
70°	609.7	599.7	577.1	559.6	549.8
72.5°	514.8	504.8	492.3	474.8	467.4
75°	419.7	414.9	402.1	387.3	392.4
77.5°	334.9	324.7	319.7	312.2	304.9
80°	249.9	247.4	242.3	234.9	229.8
82.5°	169.9	169.9	167.5	157.5	157.5
85°	102.4	100.0	97.6	89.9	87.5
87.5°	45.0	40.1	35.0	27.6	24.9
90°	0.9	9.8	26.7	25.1	25.9
92.5°	16.9	22.9	23.8	24.5	24.5
95°	39.9	47.5	48.8	48.8	47.5
97.5°	66.3	73.4	76.4	76.4	76.4
100°	96.8	103.1	105.3	105.3	104.6
102.5°	129.1	133.8	136.7	137.6	136.7
105°	164.3	166.5	168.1	169.4	169.4
107.5°	199.2	202.4	202.4	203.0	199.2
110°	233.1	237.5	237.5	237.5	235.3

TEST NUMBER: P924438

CATALOG NUMBER: DFN2DIP-HX3F0-070D030US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	269.6	274.3	273.4	271.2	269.6
115°	305.7	310.0	308.6	307.9	305.7
117.5°	341.3	347.4	343.5	341.3	339.1
120°	377.4	383.4	377.4	377.4	374.9
122.5°	410.1	417.8	413.9	411.7	410.1
125°	444.6	451.3	449.1	446.7	445.9
127.5°	478.0	486.5	483.6	480.2	478.0
130°	509.4	519.3	517.9	516.3	513.3
132.5°	544.6	552.3	552.8	549.0	546.8
135°	575.0	583.4	585.1	584.2	582.0
137.5°	608.7	615.6	617.0	616.5	613.1
140°	638.5	645.4	649.2	649.2	646.1
142.5°	669.1	675.9	678.1	679.0	675.9
145°	698.0	703.5	707.9	708.6	705.7
147.5°	724.0	730.8	734.0	735.4	732.4
150°	750.7	755.4	758.3	760.8	758.3
152.5°	774.5	779.0	782.9	785.9	782.9
155°	798.2	800.3	802.8	806.6	804.2
157.5°	818.6	820.2	821.7	827.1	823.3
160°	836.9	838.6	839.4	844.0	840.8
162.5°	853.8	853.8	854.7	859.8	856.0
165°	868.3	867.5	867.5	872.9	869.1
167.5°	881.4	878.9	878.9	884.4	880.5
170°	891.2	889.0	888.3	893.7	889.0
172.5°	898.0	895.9	895.0	900.5	895.9
175°	903.5	901.3	899.7	905.2	900.5
177.5°	906.5	904.3	902.7	907.3	902.7
180°	905.2	905.2	905.2	905.2	905.2

TEST NUMBER: P924438

CATALOG NUMBER: DFN2DIP-HX3F0-070D030US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.90	14.01	13.64	14.77	15.68	12.47	13.58	13.21	14.34	15.25
	3H	14.57	15.57	15.32	16.34	17.28	14.10	15.10	14.86	15.87	16.81
	4H	15.17	16.10	15.94	16.88	17.84	14.70	15.64	15.47	16.41	17.37
	6H	15.57	16.44	16.36	17.23	18.20	15.10	15.97	15.89	16.76	17.72
	8H	15.68	16.51	16.47	17.31	18.28	15.21	16.04	16.00	16.84	17.81
	12H	15.73	16.52	16.53	17.32	18.32	15.26	16.05	16.06	16.85	17.84
4H	2H	13.39	14.33	14.16	15.11	16.06	13.05	13.99	13.82	14.76	15.72
	3H	15.27	16.05	16.05	16.87	17.84	14.88	15.66	15.67	16.48	17.45
	4H	15.99	16.70	16.79	17.51	18.51	15.59	16.30	16.39	17.11	18.11
	6H	16.51	17.13	17.33	17.96	18.97	16.10	16.72	16.92	17.56	18.56
	8H	16.66	17.24	17.48	18.07	19.09	16.25	16.83	17.07	17.66	18.68
	12H	16.74	17.26	17.58	18.12	19.14	16.32	16.84	17.17	17.70	18.72
8H	4H	16.20	16.78	17.02	17.61	18.63	15.84	16.42	16.66	17.25	18.27
	6H	16.83	17.31	17.68	18.19	19.20	16.47	16.95	17.32	17.83	18.85
	8H	17.05	17.47	17.91	18.35	19.38	16.69	17.11	17.55	17.98	19.02
	12H	17.19	17.56	18.05	18.42	19.52	16.81	17.18	17.67	18.05	19.14
12H	4H	16.20	16.72	17.04	17.57	18.59	15.85	16.37	16.69	17.22	18.24
	6H	16.86	17.29	17.72	18.16	19.20	16.51	16.94	17.38	17.81	18.85
	8H	17.11	17.48	17.97	18.35	19.44	16.76	17.13	17.62	17.99	19.08