

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916451

Luminaire Tested: DFN2DIP-HX4F0-100D120US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916451
REPORT IS A COMBINATION OF REPORTS P899456 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-100D120US930-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15588.5 lumens
Efficiency: N/A
Efficacy: 90.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 172.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.946
Total Harmonic Distortion (THDi): 0.132
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916451

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US930-RLLFLL

Luminous Intensity Polar Plot

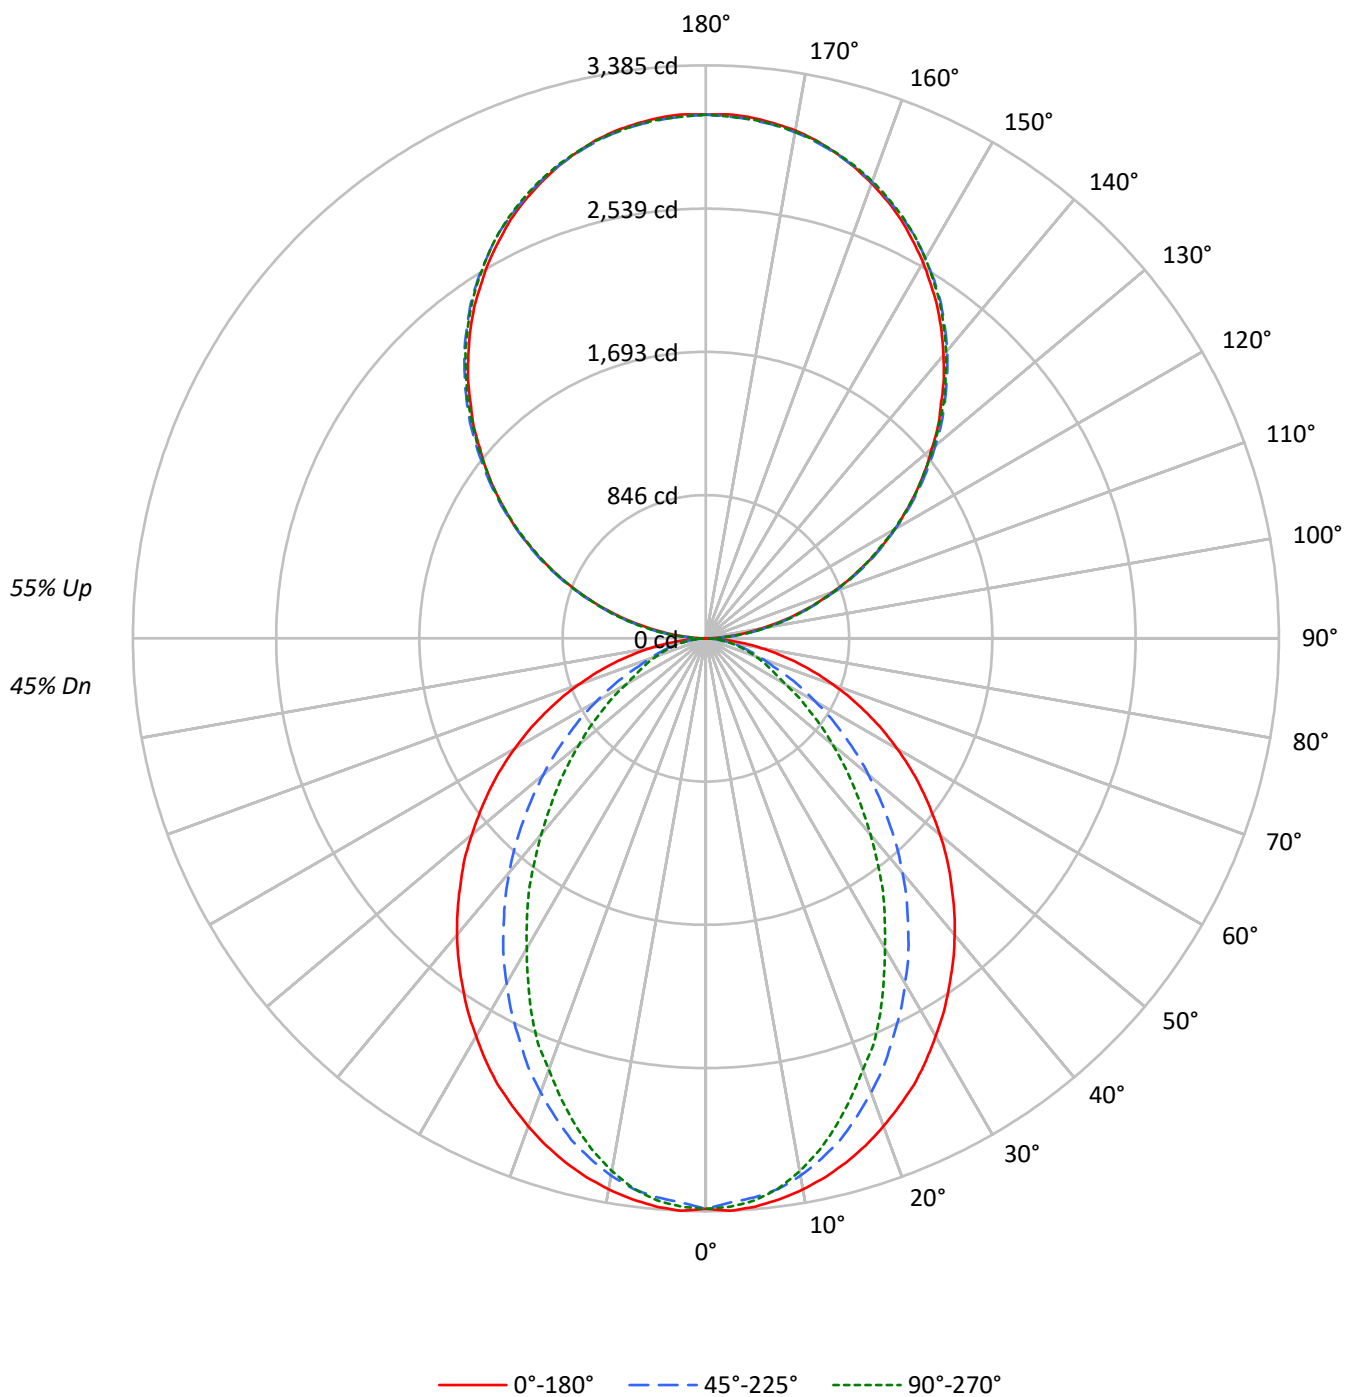

TEST NUMBER: P916451

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51
1	97	93	89	86	89	85	82	79	71	69	67	58	56	55	46	45	44
2	89	82	76	71	81	75	70	66	63	59	56	51	49	47	41	39	38
3	81	72	65	59	74	66	60	55	56	51	47	46	43	40	37	34	33
4	74	64	56	51	68	59	52	47	50	45	41	41	37	35	33	30	28
5	68	57	49	44	63	53	46	41	45	39	35	37	33	30	30	27	25
6	63	51	44	38	58	48	41	36	40	35	31	34	30	27	27	24	22
7	58	47	39	33	54	43	36	31	37	31	28	31	27	24	25	22	20
8	54	42	35	30	50	39	33	28	34	28	25	28	24	21	23	20	18
9	51	39	31	27	46	36	29	25	31	26	22	26	22	19	21	18	16
10	47	36	29	24	43	33	27	23	28	23	20	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2506	2506	2506
5°	2510	2466	2482
10°	2485	2418	2401
15°	2451	2338	2276
20°	2406	2228	2123
25°	2360	2105	1975
30°	2298	1979	1788
35°	2237	1843	1623
40°	2175	1702	1434
45°	2104	1546	1263
50°	2029	1388	1096
55°	1952	1220	935
60°	1862	1044	770
65°	1759	864	693
70°	1634	697	627
75°	1477	615	571
80°	1249	517	496
85°	873	346	373

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2333 cd/sqm

TEST NUMBER: P916451

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US930-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	315.8	2.0
10°-20°	866.9	5.6
20°-30°	1217.2	7.8
30°-40°	1326.8	8.5
40°-50°	1219.5	7.8
50°-60°	957.7	6.1
60°-70°	623.4	4.0
70°-80°	320.9	2.1
80°-90°	90.7	0.6
90°-100°	191.5	1.2
100°-110°	608.3	3.9
110°-120°	1041.1	6.7
120°-130°	1369.2	8.8
130°-140°	1536.9	9.9
140°-150°	1507.1	9.7
150°-160°	1264.2	8.1
160°-170°	838.4	5.4
170°-180°	293.0	1.9
0°-30°	2399.9	15.4
0°-40°	3726.7	23.9
0°-60°	5903.9	37.9
0°-90°	6938.8	44.5
90°-120°	1840.9	11.8
90°-150°	6254.0	40.1
90°-180°	8650.0	55.5
0°-180°	15588.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3370	3370	3370	3370	3370	
5°	3370	3354	3315	3342	3333	320
15°	3205	3171	3068	3010	2979	903
25°	2909	2812	2610	2485	2440	1338
35°	2507	2351	2083	1891	1823	1569
45°	2049	1845	1525	1308	1235	1583
55°	1558	1320	991	808	750	1392
65°	1052	805	531	427	418	1043
75°	561	348	244	223	220	593
85°	131	67	58	58	58	150
90°	3	34	91	86	89	15
95°	136	162	167	167	162	152
105°	562	569	575	579	579	593
115°	1045	1060	1055	1052	1045	1033
125°	1520	1543	1536	1527	1524	1358
135°	1965	1994	2000	1997	1990	1519
145°	2386	2405	2420	2423	2412	1491
155°	2728	2736	2744	2757	2749	1256
165°	2968	2966	2966	2984	2971	837
175°	3089	3081	3076	3094	3078	293
180°	3094	3094	3094	3094	3094	

TEST NUMBER: P916451

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3369.6	3369.6	3369.6	3369.6	3369.6
2.5°	3384.8	3369.6	3336.0	3366.7	3360.6
5°	3369.6	3354.4	3314.6	3342.2	3333.0
7.5°	3342.2	3324.0	3281.2	3293.2	3278.1
10°	3305.5	3284.2	3223.4	3214.0	3195.9
12.5°	3260.0	3232.4	3149.9	3131.8	3098.1
15°	3204.9	3171.3	3067.7	3009.8	2979.4
17.5°	3140.9	3092.0	2963.9	2896.9	2848.1
20°	3067.7	3006.6	2854.2	2778.2	2710.9
22.5°	2988.5	2918.3	2741.3	2637.8	2592.2
25°	2909.2	2811.6	2610.3	2485.4	2439.5
27.5°	2814.7	2710.9	2488.3	2345.0	2274.8
30°	2714.1	2597.9	2354.0	2198.8	2116.3
32.5°	2616.5	2476.0	2226.3	2043.1	1966.7
35°	2506.7	2351.2	2082.9	1890.8	1823.4
37.5°	2400.0	2232.0	1948.6	1738.1	1662.0
40°	2287.1	2104.3	1808.2	1591.8	1512.5
42.5°	2171.2	1976.1	1668.2	1442.3	1366.3
45°	2049.3	1844.8	1524.9	1308.1	1234.9
47.5°	1933.5	1717.0	1387.6	1170.8	1103.9
50°	1805.3	1588.9	1253.4	1042.8	979.0
52.5°	1680.1	1451.4	1125.3	924.0	866.1
55°	1558.1	1320.4	991.0	808.2	750.2
57.5°	1433.3	1189.3	872.3	701.4	652.6
60°	1305.1	1061.2	747.1	591.7	542.9
62.5°	1180.2	936.3	640.3	494.1	469.8
65°	1052.1	804.9	530.6	427.1	417.7
67.5°	930.2	683.0	427.1	375.0	365.9
70°	802.0	564.3	353.6	323.2	311.0
72.5°	680.0	454.2	295.7	271.4	265.3
75°	561.0	347.5	243.9	222.6	219.6
77.5°	442.3	246.9	192.2	179.9	173.7
80°	332.2	177.0	146.3	134.3	134.3
82.5°	231.6	119.0	100.6	94.5	94.5
85°	131.0	66.9	57.9	57.9	57.9
87.5°	48.8	24.3	24.3	21.4	21.4
90°	2.8	33.6	91.4	85.9	88.6
92.5°	57.8	78.4	81.1	84.0	84.0
95°	136.2	162.3	167.0	167.0	162.3
97.5°	226.7	250.9	261.2	261.2	261.2
100°	331.2	352.6	360.0	360.0	357.3
102.5°	441.2	457.1	467.3	470.2	467.3
105°	561.6	569.0	574.6	579.3	579.3
107.5°	680.9	692.2	692.2	694.0	680.9
110°	796.6	811.5	811.5	811.5	804.1



TEST NUMBER: P916451

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	921.6	937.5	934.7	927.2	921.6
115°	1044.7	1059.7	1055.0	1052.2	1044.7
117.5°	1166.9	1187.5	1174.4	1166.9	1159.5
120°	1290.1	1310.6	1290.1	1290.1	1281.7
122.5°	1402.1	1428.2	1415.1	1407.6	1402.1
125°	1519.6	1542.9	1535.5	1527.1	1524.2
127.5°	1634.3	1663.2	1652.9	1641.8	1634.3
130°	1741.6	1775.1	1770.5	1764.9	1754.6
132.5°	1861.9	1888.1	1889.9	1876.8	1869.4
135°	1965.4	1994.4	2000.0	1997.2	1989.7
137.5°	2081.1	2104.4	2109.1	2107.2	2096.1
140°	2182.8	2206.1	2219.2	2219.2	2208.9
142.5°	2287.3	2310.6	2318.1	2320.8	2310.6
145°	2386.1	2404.8	2419.7	2422.6	2412.3
147.5°	2474.8	2498.1	2509.3	2514.0	2503.7
150°	2566.2	2582.0	2592.3	2600.7	2592.3
152.5°	2647.4	2663.2	2676.3	2686.6	2676.3
155°	2728.5	2736.0	2744.4	2757.4	2749.0
157.5°	2798.5	2804.1	2808.7	2827.4	2814.3
160°	2861.0	2866.6	2869.4	2885.3	2874.0
162.5°	2918.8	2918.8	2921.6	2939.3	2926.3
165°	2968.3	2965.5	2965.5	2984.1	2971.0
167.5°	3013.0	3004.6	3004.6	3023.3	3010.2
170°	3046.6	3039.1	3036.3	3055.0	3039.1
172.5°	3069.9	3062.4	3059.7	3078.3	3062.4
175°	3088.6	3081.1	3075.5	3094.1	3078.3
177.5°	3098.9	3091.4	3085.7	3101.6	3085.7
180°	3094.1	3094.1	3094.1	3094.1	3094.1



TEST NUMBER: P916451

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US930-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.80	10.59	10.81	11.60	12.95	5.78	6.56	6.78	7.58	8.93
	3H	11.48	12.18	12.50	13.21	14.58	6.96	7.67	7.98	8.69	10.06
	4H	12.08	12.75	13.12	13.78	15.16	7.41	8.08	8.44	9.10	10.48
	6H	12.50	13.12	13.55	14.15	15.54	7.73	8.35	8.77	9.38	10.77
	8H	12.63	13.21	13.68	14.26	15.65	7.82	8.41	8.87	9.45	10.84
	12H	12.69	13.24	13.74	14.29	15.69	7.87	8.42	8.92	9.46	10.87
4H	2H	9.82	10.48	10.85	11.51	12.89	6.37	7.03	7.40	8.06	9.44
	3H	11.64	12.20	12.69	13.25	14.64	7.71	8.27	8.76	9.32	10.71
	4H	12.33	12.84	13.39	13.89	15.30	8.26	8.77	9.31	9.81	11.23
	6H	12.85	13.28	13.91	14.35	15.76	8.68	9.12	9.74	10.19	11.59
	8H	13.02	13.43	14.08	14.49	15.91	8.81	9.22	9.87	10.28	11.70
	12H	13.12	13.48	14.20	14.56	15.99	8.87	9.24	9.95	10.32	11.75
8H	4H	12.30	12.70	13.36	13.77	15.19	8.54	8.95	9.60	10.01	11.43
	6H	12.86	13.20	13.95	14.30	15.72	9.06	9.39	10.14	10.50	11.92
	8H	13.08	13.38	14.17	14.46	15.90	9.25	9.55	10.34	10.63	12.07
	12H	13.22	13.48	14.31	14.56	16.04	9.37	9.63	10.47	10.71	12.19
12H	4H	12.25	12.62	13.33	13.69	15.12	8.54	8.91	9.62	9.99	11.41
	6H	12.84	13.13	13.93	14.22	15.66	9.11	9.40	10.20	10.49	11.93
	8H	13.06	13.32	14.15	14.40	15.88	9.32	9.58	10.41	10.66	12.14