

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924646

Luminaire Tested: DFN2DIP-HX4F0-110D090US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924646
REPORT IS A COMBINATION OF REPORTS P899403 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-110D090US950-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17987.7 lumens
Efficiency: N/A
Efficacy: 110.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 163.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924646

CATALOG NUMBER: DFN2DIP-HX4F0-110D090US950-FLLFLL

Luminous Intensity Polar Plot

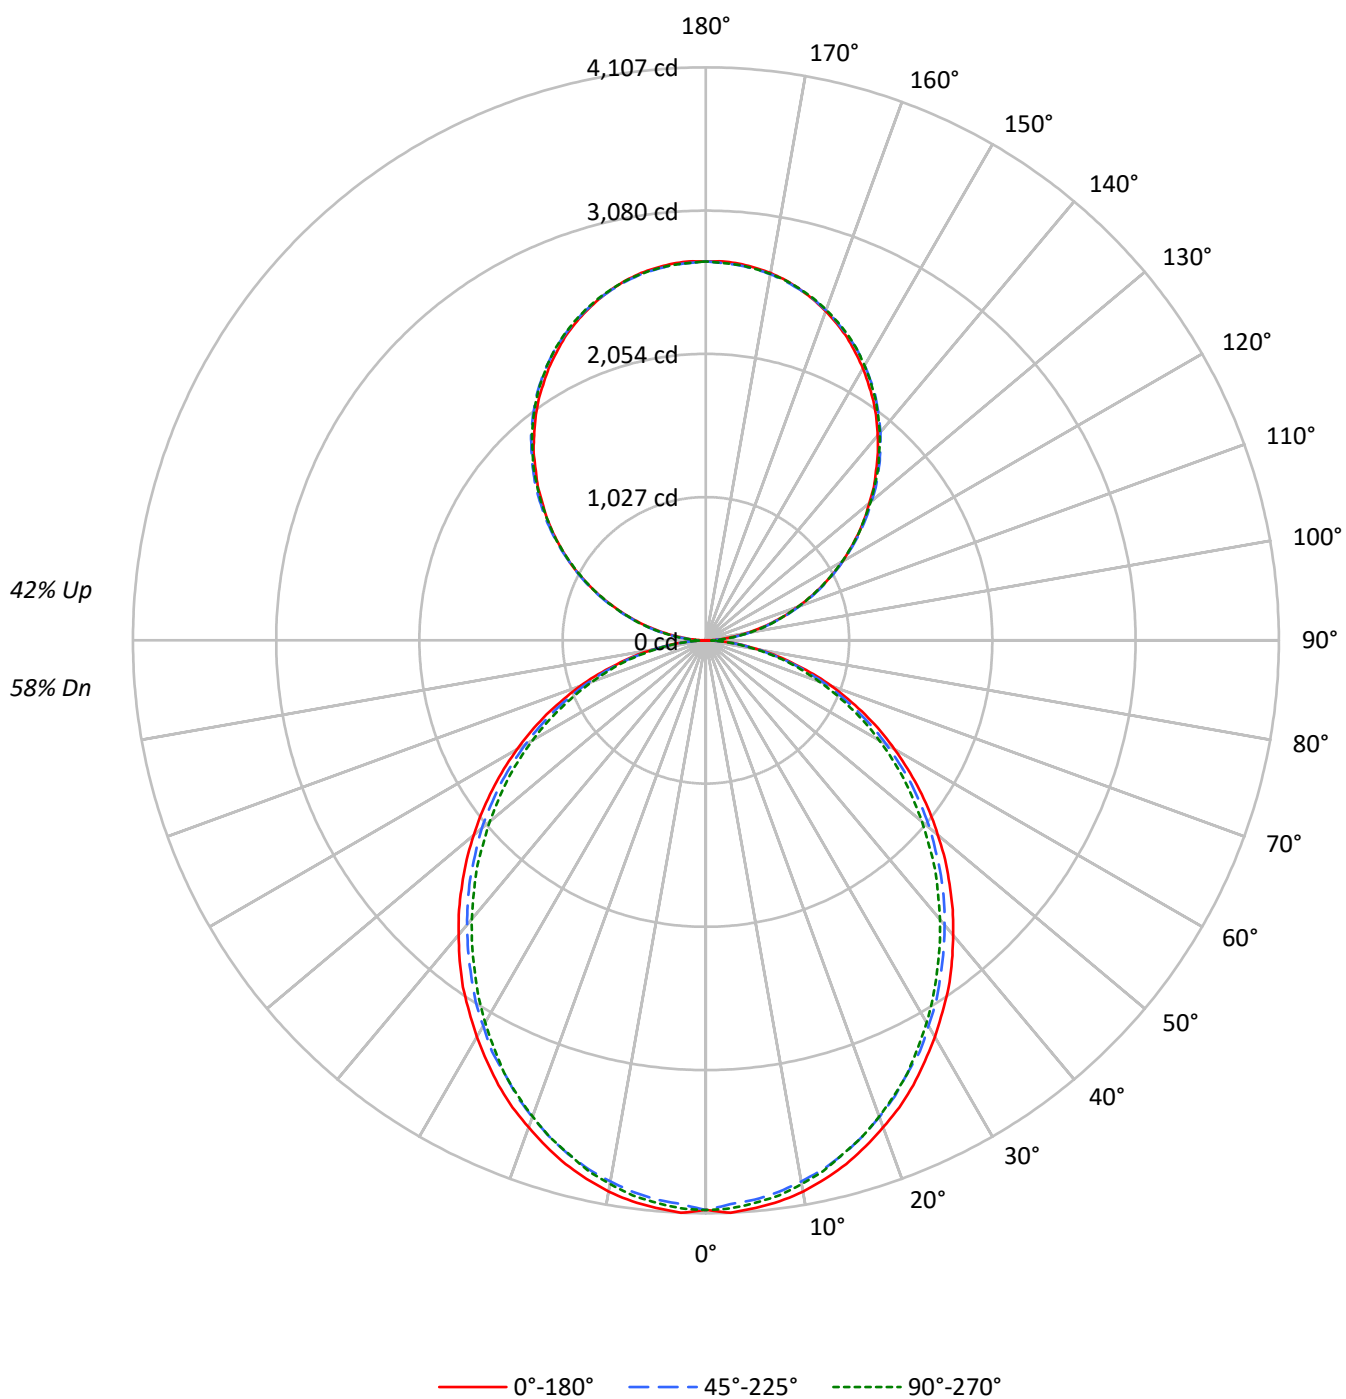

TEST NUMBER: P924646

CATALOG NUMBER: DFN2DIP-HX4F0-110D090US950-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	63	63	63
1	100	95	91	88	93	89	85	82	77	74	72	66	64	62	56	55	53
2	91	83	77	72	84	78	72	68	67	63	60	58	55	52	49	47	45
3	83	73	66	60	77	68	62	56	59	54	50	51	47	44	44	41	38
4	76	65	57	51	70	61	53	48	53	47	43	46	41	38	39	36	33
5	70	58	49	43	65	54	47	41	47	42	37	41	36	33	35	32	29
6	64	52	44	38	60	49	41	36	43	37	32	37	32	29	32	28	25
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	29	25	23
8	55	43	35	29	51	40	33	28	35	30	25	31	26	23	27	23	20
9	51	39	31	26	48	37	30	25	32	27	23	29	24	21	25	21	18
10	48	36	28	24	45	34	27	23	30	24	21	26	22	19	23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3036	3036	3036
5°	3041	2994	3014
10°	3017	2954	2974
15°	2973	2906	2910
20°	2913	2839	2845
25°	2854	2758	2769
30°	2779	2683	2674
35°	2709	2595	2572
40°	2622	2505	2476
45°	2535	2416	2377
50°	2440	2322	2263
55°	2341	2214	2158
60°	2229	2085	2038
65°	2107	1951	1896
70°	1952	1789	1743
75°	1736	1594	1603
80°	1477	1346	1333
85°	1072	917	887

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2535 cd/sqm

TEST NUMBER: P924646

CATALOG NUMBER: DFN2DIP-HX4F0-110D090US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	384.3	2.1
10°-20°	1081.3	6.0
20°-30°	1589.1	8.8
30°-40°	1845.7	10.3
40°-50°	1843.4	10.2
50°-60°	1607.4	8.9
60°-70°	1188.2	6.6
70°-80°	672.3	3.7
80°-90°	185.1	1.0
90°-100°	168.0	0.9
100°-110°	533.9	3.0
110°-120°	913.7	5.1
120°-130°	1201.6	6.7
130°-140°	1348.7	7.5
140°-150°	1322.6	7.4
150°-160°	1109.5	6.2
160°-170°	735.8	4.1
170°-180°	257.2	1.4
0°-30°	3054.8	17.0
0°-40°	4900.4	27.2
0°-60°	8351.2	46.4
0°-90°	10396.8	57.8
90°-120°	1615.6	9.0
90°-150°	5488.5	30.5
90°-180°	7591.0	42.2
0°-180°	17987.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4083	4083	4083	4083	4083	
5°	4083	4068	4024	4056	4048	388
15°	3887	3864	3812	3828	3809	1095
25°	3518	3487	3420	3428	3420	1619
35°	3035	2996	2933	2909	2890	1895
45°	2470	2442	2383	2340	2324	1906
55°	1869	1845	1798	1751	1732	1671
65°	1260	1237	1198	1162	1143	1246
75°	659	652	632	609	617	704
85°	161	157	153	141	138	179
90°	2	30	80	75	78	17
95°	120	142	146	146	142	133
105°	493	499	504	508	508	520
115°	917	930	926	924	917	907
125°	1334	1354	1348	1340	1338	1192
135°	1725	1750	1755	1753	1746	1333
145°	2094	2110	2124	2126	2117	1308
155°	2394	2401	2408	2420	2413	1102
165°	2605	2602	2602	2619	2607	735
175°	2710	2704	2699	2716	2702	258
180°	2716	2716	2716	2716	2716	

TEST NUMBER: P924646

CATALOG NUMBER: DFN2DIP-HX4F0-110D090US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4083.3	4083.3	4083.3	4083.3	4083.3
2.5°	4107.0	4087.4	4044.1	4083.3	4075.8
5°	4083.3	4067.9	4024.5	4055.7	4048.3
7.5°	4055.7	4032.5	3989.2	4020.8	4012.9
10°	4012.9	3985.3	3938.3	3969.5	3957.9
12.5°	3953.8	3930.4	3883.4	3902.9	3895.0
15°	3887.1	3863.7	3812.5	3828.3	3808.7
17.5°	3804.6	3781.3	3730.0	3749.6	3730.0
20°	3714.2	3690.8	3635.9	3647.5	3632.2
22.5°	3624.2	3588.8	3537.5	3537.5	3529.6
25°	3518.0	3486.8	3420.1	3427.6	3420.1
27.5°	3400.1	3372.6	3321.7	3310.1	3290.5
30°	3282.6	3250.9	3192.2	3180.5	3164.7
32.5°	3156.8	3133.5	3070.5	3046.8	3031.0
35°	3035.2	2996.0	2933.1	2909.3	2889.8
37.5°	2897.7	2862.3	2799.4	2771.8	2752.3
40°	2756.5	2724.8	2661.9	2626.9	2611.1
42.5°	2619.0	2587.3	2524.9	2485.3	2462.0
45°	2469.9	2442.3	2383.2	2340.4	2324.5
47.5°	2324.5	2297.0	2234.1	2190.8	2167.4
50°	2171.2	2151.7	2096.6	2041.7	2022.1
52.5°	2022.1	1994.5	1943.8	1900.4	1872.9
55°	1869.2	1845.4	1798.4	1751.3	1731.7
57.5°	1715.9	1696.3	1645.1	1597.9	1582.1
60°	1562.6	1547.2	1492.2	1448.8	1437.2
62.5°	1413.4	1386.0	1346.8	1307.6	1291.8
65°	1260.5	1236.8	1197.7	1162.3	1142.7
67.5°	1103.5	1083.6	1048.5	1021.1	1005.2
70°	958.1	942.3	906.9	879.4	863.9
72.5°	809.0	793.2	773.6	746.1	734.4
75°	659.4	652.0	631.9	608.7	616.6
77.5°	526.1	510.3	502.4	490.7	479.1
80°	392.9	388.7	380.7	369.1	361.2
82.5°	267.0	267.0	263.3	247.5	247.5
85°	160.8	157.0	153.3	141.2	137.5
87.5°	70.8	62.9	55.0	43.3	39.1
90°	2.5	29.5	80.2	75.3	77.8
92.5°	50.8	68.8	71.3	73.6	73.6
95°	119.5	142.4	146.5	146.5	142.4
97.5°	198.9	220.2	229.2	229.2	229.2
100°	290.6	309.5	316.0	316.0	313.6
102.5°	387.2	401.2	410.1	412.6	410.1
105°	492.8	499.3	504.3	508.4	508.4
107.5°	597.6	607.4	607.4	609.0	597.6
110°	699.1	712.3	712.3	712.3	705.7

TEST NUMBER: P924646

CATALOG NUMBER: DFN2DIP-HX4F0-110D090US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	808.8	822.7	820.2	813.8	808.8
115°	916.9	930.0	925.9	923.5	916.9
117.5°	1024.1	1042.1	1030.7	1024.1	1017.5
120°	1132.2	1150.1	1132.2	1132.2	1124.8
122.5°	1230.4	1253.4	1241.9	1235.3	1230.4
125°	1333.6	1354.0	1347.5	1340.1	1337.7
127.5°	1434.2	1459.6	1450.7	1440.8	1434.2
130°	1528.4	1557.9	1553.8	1548.8	1539.9
132.5°	1634.0	1656.9	1658.5	1647.1	1640.6
135°	1724.8	1750.2	1755.2	1752.7	1746.2
137.5°	1826.3	1846.8	1851.0	1849.3	1839.5
140°	1915.6	1936.0	1947.5	1947.5	1938.5
142.5°	2007.3	2027.7	2034.3	2036.8	2027.7
145°	2094.1	2110.4	2123.5	2126.0	2117.0
147.5°	2171.9	2192.3	2202.1	2206.2	2197.3
150°	2252.1	2266.0	2275.0	2282.3	2275.0
152.5°	2323.3	2337.2	2348.7	2357.7	2348.7
155°	2394.5	2401.0	2408.5	2419.9	2412.6
157.5°	2455.9	2460.8	2464.9	2481.3	2469.8
160°	2510.7	2515.7	2518.2	2532.0	2522.2
162.5°	2561.5	2561.5	2564.0	2579.5	2568.1
165°	2604.9	2602.4	2602.4	2618.8	2607.4
167.5°	2644.2	2636.9	2636.9	2653.2	2641.7
170°	2673.7	2667.1	2664.7	2681.0	2667.1
172.5°	2694.1	2687.6	2685.1	2701.5	2687.6
175°	2710.5	2703.9	2699.1	2715.5	2701.5
177.5°	2719.5	2713.0	2708.0	2722.0	2708.0
180°	2715.5	2715.5	2715.5	2715.5	2715.5

TEST NUMBER: P924646

CATALOG NUMBER: DFN2DIP-HX4F0-110D090US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.82	12.76	12.71	13.66	14.82	11.39	12.32	12.28	13.23	14.39
	3H	13.49	14.33	14.39	15.24	16.43	13.01	13.85	13.91	14.77	15.95
	4H	14.08	14.87	14.99	15.80	16.99	13.61	14.40	14.52	15.32	16.51
	6H	14.48	15.22	15.41	16.14	17.35	14.01	14.74	14.93	15.67	16.87
	8H	14.59	15.29	15.52	16.23	17.44	14.12	14.81	15.05	15.76	16.96
	12H	14.64	15.31	15.58	16.25	17.47	14.16	14.83	15.10	15.77	16.99
4H	2H	12.29	13.09	13.21	14.01	15.20	11.95	12.74	12.87	13.66	14.85
	3H	14.17	14.83	15.10	15.78	16.99	13.77	14.44	14.70	15.39	16.59
	4H	14.88	15.49	15.83	16.44	17.67	14.48	15.08	15.42	16.03	17.26
	6H	15.40	15.93	16.36	16.90	18.13	14.99	15.52	15.95	16.49	17.72
	8H	15.56	16.04	16.51	17.01	18.25	15.14	15.63	16.10	16.60	17.84
	12H	15.63	16.07	16.61	17.06	18.31	15.21	15.65	16.19	16.63	17.88
8H	4H	15.09	15.58	16.04	16.54	17.78	14.73	15.21	15.68	16.18	17.42
	6H	15.72	16.13	16.71	17.13	18.38	15.36	15.76	16.34	16.77	18.01
	8H	15.95	16.30	16.94	17.30	18.56	15.58	15.93	16.57	16.93	18.19
	12H	16.08	16.40	17.08	17.39	18.69	15.70	16.01	16.69	17.00	18.31
12H	4H	15.08	15.52	16.05	16.50	17.75	14.72	15.16	15.70	16.15	17.40
	6H	15.75	16.11	16.75	17.11	18.37	15.40	15.76	16.39	16.76	18.02
	8H	16.00	16.32	17.00	17.30	18.61	15.64	15.96	16.64	16.95	18.25