

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902866

Luminaire Tested: DFN2DIP-PN2F0-020D060US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902866
REPORT IS A COMBINATION OF REPORTS P899502 AND P896349
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-020D060US830-RLLFLL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6607.2 lumens
Efficiency: N/A
Efficacy: 95.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 69
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902866

CATALOG NUMBER: DFN2DIP-PN2F0-020D060US830-RLLFLL

Luminous Intensity Polar Plot

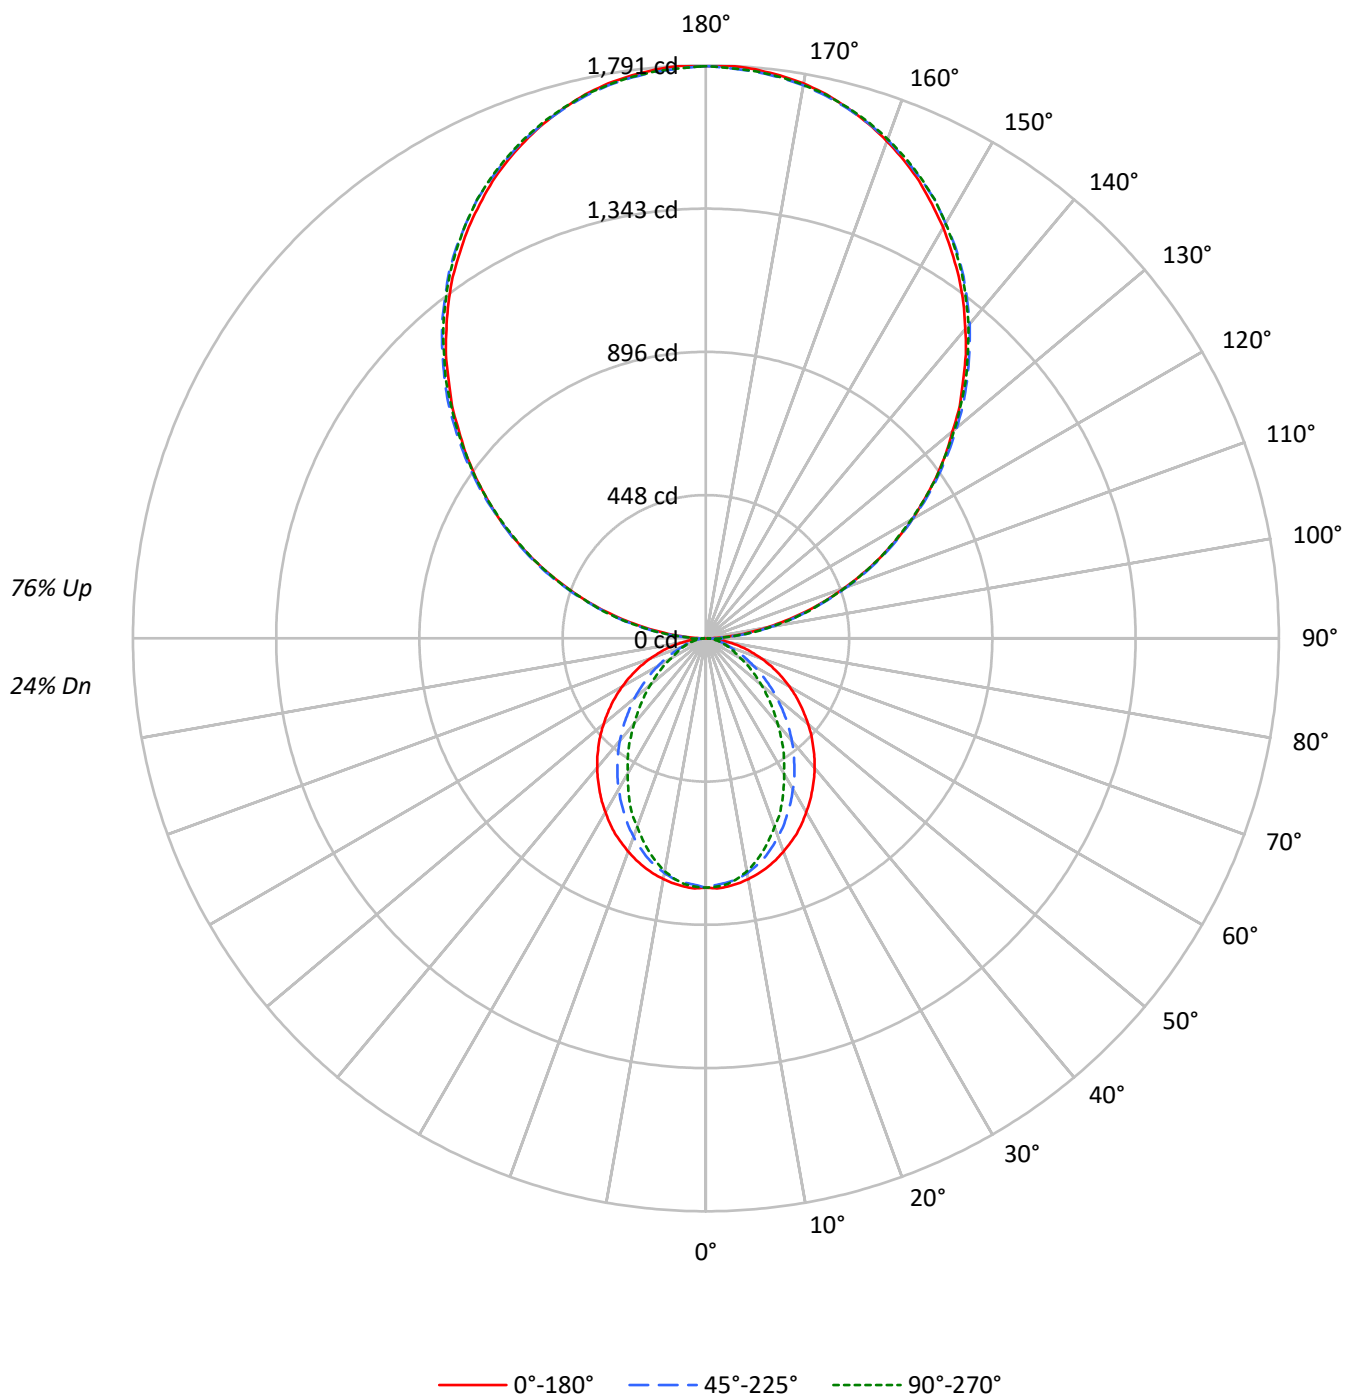

TEST NUMBER: P902866

CATALOG NUMBER: DFN2DIP-PN2F0-020D060US830-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33
1	92	88	85	81	82	79	76	73	61	59	57	44	43	42	29	28	28
2	84	77	71	67	75	69	64	60	53	50	47	39	37	35	26	25	24
3	77	68	61	56	68	61	55	50	47	43	40	35	32	30	23	22	20
4	70	60	53	47	62	54	48	43	42	38	34	31	28	26	21	19	18
5	64	54	46	40	57	48	42	37	38	33	29	28	25	22	19	17	16
6	59	48	40	35	53	43	37	32	34	29	26	25	22	20	17	15	14
7	55	43	36	30	49	39	32	28	31	26	23	23	20	17	16	14	12
8	51	39	32	27	45	35	29	24	28	23	20	21	18	16	14	12	11
9	47	36	29	24	42	32	26	22	25	21	18	19	16	14	13	11	10
10	44	33	26	21	39	29	23	19	23	19	16	18	15	13	12	10	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1687	1687	1687
5°	1687	1657	1669
10°	1668	1621	1612
15°	1642	1564	1526
20°	1609	1487	1421
25°	1575	1401	1320
30°	1531	1313	1192
35°	1487	1219	1080
40°	1442	1122	952
45°	1390	1016	836
50°	1337	908	723
55°	1280	793	614
60°	1215	674	504
65°	1140	554	451
70°	1048	441	404
75°	933	382	363
80°	767	310	307
85°	502	193	218

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2411 cd/sqm

TEST NUMBER: P902866

CATALOG NUMBER: DFN2DIP-PN2F0-020D060US830-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.0	1.1
10°-20°	200.4	3.0
20°-30°	281.4	4.3
30°-40°	306.8	4.6
40°-50°	282.0	4.3
50°-60°	221.4	3.4
60°-70°	144.1	2.2
70°-80°	74.2	1.1
80°-90°	24.0	0.4
90°-100°	110.7	1.7
100°-110°	351.6	5.3
110°-120°	601.8	9.1
120°-130°	791.4	12.0
130°-140°	888.4	13.4
140°-150°	871.1	13.2
150°-160°	730.8	11.1
160°-170°	484.6	7.3
170°-180°	169.4	2.6
0°-30°	554.9	8.4
0°-40°	861.7	13.0
0°-60°	1365.1	20.7
0°-90°	1607.4	24.3
90°-120°	1064.1	16.1
90°-150°	3615.0	54.7
90°-180°	5000.0	75.7
0°-180°	6607.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	779	779	779	779	779	
5°	779	776	766	773	771	74
15°	741	733	709	696	689	209
25°	673	650	604	575	564	309
35°	580	544	482	437	422	363
45°	474	426	353	302	286	366
55°	360	305	229	187	173	322
65°	243	186	123	99	97	241
75°	130	80	56	52	51	137
85°	30	16	13	13	13	35
90°	2	19	53	50	51	7
95°	79	94	96	96	94	88
105°	325	329	332	335	335	343
115°	604	613	610	608	604	597
125°	878	892	888	883	881	785
135°	1136	1153	1156	1154	1150	878
145°	1379	1390	1399	1400	1394	862
155°	1577	1582	1586	1594	1589	726
165°	1716	1714	1714	1725	1717	484
175°	1785	1781	1778	1789	1779	170
180°	1789	1789	1789	1789	1789	

TEST NUMBER: P902866

CATALOG NUMBER: DFN2DIP-PN2F0-020D060US830-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	779.1	779.1	779.1	779.1	779.1
2.5°	782.6	779.1	771.3	778.4	777.0
5°	779.1	775.6	766.4	772.8	770.6
7.5°	772.8	768.5	758.7	761.5	757.9
10°	764.3	759.3	745.3	743.1	739.0
12.5°	753.8	747.3	728.3	724.2	716.3
15°	741.0	733.2	709.3	695.9	688.9
17.5°	726.2	714.9	685.3	669.8	658.6
20°	709.3	695.1	660.0	642.3	626.8
22.5°	691.0	674.8	633.9	609.9	599.4
25°	672.7	650.1	603.5	574.7	564.0
27.5°	650.8	626.8	575.3	542.2	525.9
30°	627.5	600.7	544.3	508.4	489.3
32.5°	604.9	572.5	514.7	472.4	454.8
35°	579.6	543.7	481.6	437.2	421.6
37.5°	554.9	516.0	450.5	401.9	384.3
40°	528.8	486.5	418.1	368.1	349.7
42.5°	502.0	456.9	385.7	333.5	315.9
45°	473.8	426.5	352.6	302.5	285.5
47.5°	447.0	397.0	320.8	270.7	255.2
50°	417.5	367.4	289.8	241.1	226.4
52.5°	388.4	335.5	260.1	213.7	200.3
55°	360.2	305.3	229.1	186.9	173.4
57.5°	331.4	274.9	201.7	162.2	150.9
60°	301.8	245.3	172.8	136.9	125.5
62.5°	272.9	216.5	148.1	114.2	108.6
65°	243.3	186.2	122.7	98.8	96.6
67.5°	215.1	157.9	98.8	86.7	84.6
70°	185.4	130.4	81.7	74.7	71.9
72.5°	157.2	105.0	68.3	62.8	61.4
75°	129.7	80.3	56.4	51.5	50.8
77.5°	102.3	57.1	44.4	41.6	40.2
80°	76.8	40.9	33.8	31.0	31.0
82.5°	53.5	27.5	23.3	21.9	21.9
85°	30.3	15.5	13.4	13.4	13.4
87.5°	11.3	5.7	5.7	4.9	4.9
90°	1.6	19.4	52.9	49.6	51.2
92.5°	33.5	45.3	46.9	48.5	48.5
95°	78.7	93.8	96.5	96.5	93.8
97.5°	131.0	145.1	151.0	151.0	151.0
100°	191.4	203.8	208.1	208.1	206.5
102.5°	255.1	264.2	270.1	271.7	270.1
105°	324.6	328.9	332.2	334.9	334.9
107.5°	393.6	400.1	400.1	401.1	393.6
110°	460.5	469.1	469.1	469.1	464.8

TEST NUMBER: P902866

CATALOG NUMBER: DFN2DIP-PN2F0-020D060US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	532.7	541.9	540.3	535.9	532.7
115°	603.9	612.6	609.8	608.2	603.9
117.5°	674.6	686.5	678.8	674.6	670.2
120°	745.7	757.6	745.7	745.7	740.8
122.5°	810.4	825.5	817.9	813.7	810.4
125°	878.4	891.8	887.5	882.7	881.1
127.5°	944.7	961.4	955.5	949.0	944.7
130°	1006.7	1026.1	1023.4	1020.2	1014.3
132.5°	1076.3	1091.4	1092.4	1084.9	1080.5
135°	1136.1	1152.8	1156.0	1154.4	1150.1
137.5°	1203.0	1216.4	1219.2	1218.0	1211.6
140°	1261.8	1275.3	1282.8	1282.8	1276.9
142.5°	1322.1	1335.6	1339.9	1341.5	1335.6
145°	1379.3	1390.1	1398.7	1400.3	1394.4
147.5°	1430.5	1444.0	1450.5	1453.1	1447.2
150°	1483.4	1492.5	1498.5	1503.3	1498.5
152.5°	1530.2	1539.5	1547.0	1552.9	1547.0
155°	1577.2	1581.5	1586.3	1593.9	1589.0
157.5°	1617.6	1620.9	1623.5	1634.4	1626.8
160°	1653.8	1657.0	1658.6	1667.7	1661.3
162.5°	1687.2	1687.2	1688.8	1699.0	1691.5
165°	1715.7	1714.1	1714.1	1724.9	1717.4
167.5°	1741.6	1736.8	1736.8	1747.6	1740.0
170°	1761.0	1756.7	1755.1	1765.9	1756.7
172.5°	1774.5	1770.2	1768.6	1779.3	1770.2
175°	1785.3	1781.0	1777.7	1788.6	1779.3
177.5°	1791.2	1787.0	1783.7	1792.8	1783.7
180°	1788.6	1788.6	1788.6	1788.6	1788.6

TEST NUMBER: P902866

CATALOG NUMBER: DFN2DIP-PN2F0-020D060US830-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.76	6.42	6.92	7.56	9.16	1.73	2.39	2.89	3.53	5.13
	3H	7.41	7.99	8.57	9.14	10.75	2.89	3.48	4.05	4.62	6.24
	4H	7.99	8.55	9.16	9.70	11.31	3.32	3.88	4.49	5.03	6.64
	6H	8.39	8.90	9.57	10.05	11.68	3.62	4.13	4.80	5.28	6.91
	8H	8.50	8.99	9.68	10.15	11.77	3.70	4.18	4.88	5.35	6.97
	12H	8.55	9.01	9.73	10.17	11.81	3.73	4.19	4.91	5.35	6.99
4H	2H	5.75	6.31	6.93	7.46	9.08	2.29	2.85	3.47	4.00	5.62
	3H	7.54	8.01	8.73	9.18	10.81	3.61	4.07	4.79	5.25	6.87
	4H	8.21	8.64	9.40	9.80	11.45	4.14	4.56	5.32	5.72	7.37
	6H	8.70	9.07	9.89	10.25	11.89	4.53	4.89	5.72	6.08	7.71
	8H	8.86	9.20	10.05	10.38	12.03	4.64	4.98	5.83	6.16	7.81
	12H	8.94	9.25	10.14	10.43	12.09	4.69	5.00	5.89	6.19	7.84
8H	4H	8.16	8.51	9.35	9.68	11.33	4.39	4.73	5.58	5.91	7.56
	6H	8.70	8.98	9.91	10.20	11.85	4.88	5.16	6.08	6.38	8.03
	8H	8.90	9.15	10.11	10.34	12.01	5.06	5.30	6.27	6.50	8.17
	12H	9.02	9.23	10.23	10.43	12.13	5.15	5.37	6.37	6.56	8.26
12H	4H	8.11	8.42	9.31	9.60	11.26	4.38	4.69	5.59	5.88	7.54
	6H	8.67	8.92	9.89	10.11	11.78	4.92	5.17	6.13	6.36	8.03
	8H	8.87	9.09	10.09	10.28	11.98	5.11	5.33	6.32	6.52	8.22

END OF REPORT