

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906200

Luminaire Tested: DFN2DIP-SQ2F0-030D040US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906200
REPORT IS A COMBINATION OF REPORTS P899783 AND P896659
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-030D040US835-FLLFLL
Description: 2 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6510.0 lumens
Efficiency: N/A
Efficacy: 124.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 52.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906200

CATALOG NUMBER: DFN2DIP-SQ2F0-030D040US835-FLLFLL

Luminous Intensity Polar Plot

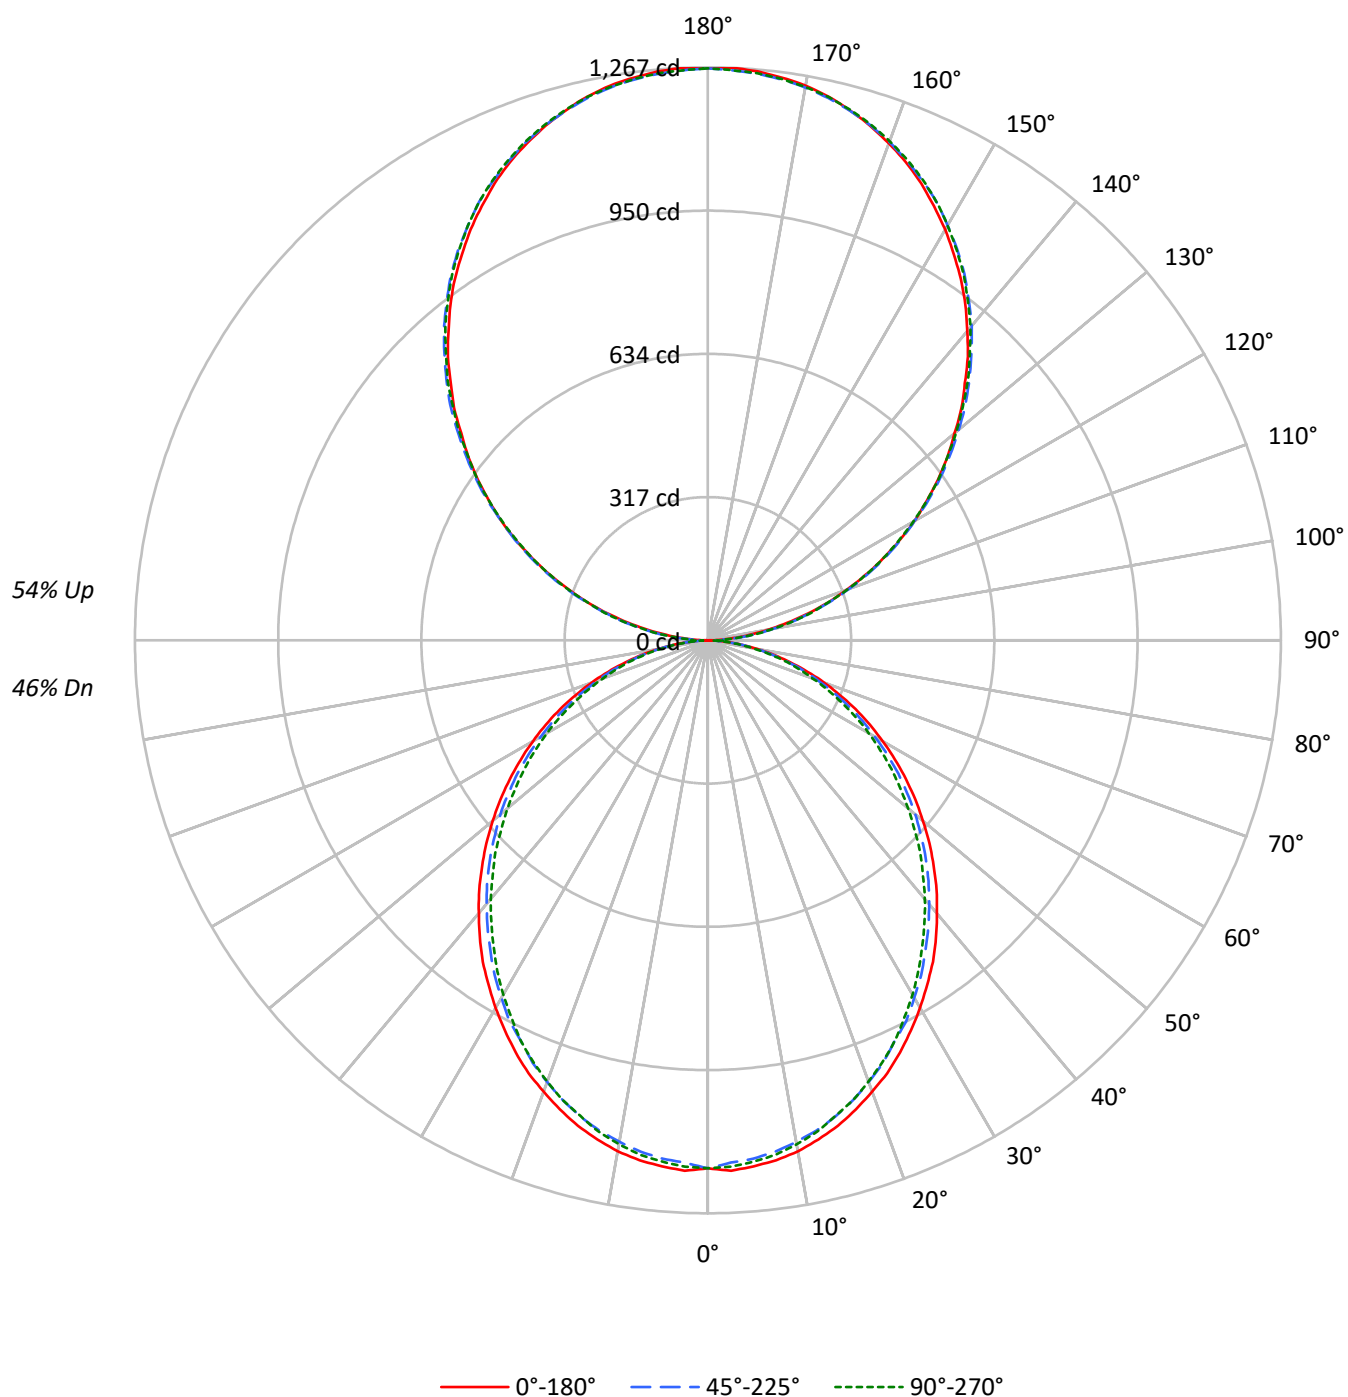

TEST NUMBER: P906200

CATALOG NUMBER: DFN2DIP-SQ2F0-030D040US835-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52
1	97	93	89	85	89	85	82	79	71	69	66	58	56	55	46	45	44
2	88	81	75	70	81	74	69	65	62	58	55	51	48	46	41	39	37
3	80	71	64	58	73	65	59	54	55	50	46	45	42	39	36	34	32
4	74	63	55	49	67	58	51	46	49	43	39	40	36	33	32	29	27
5	67	56	48	42	62	52	45	39	44	38	34	36	32	29	29	26	24
6	62	50	42	36	57	46	39	34	39	34	30	33	28	25	26	23	21
7	57	45	37	32	53	42	35	30	36	30	26	30	25	22	24	21	19
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	17
9	50	37	30	25	45	35	28	24	30	24	21	25	21	18	20	17	15
10	46	34	27	22	42	32	25	21	27	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2567	2567	2567
5°	2566	2525	2544
10°	2541	2486	2506
15°	2499	2439	2449
20°	2444	2377	2390
25°	2390	2303	2323
30°	2322	2235	2239
35°	2258	2154	2150
40°	2179	2073	2064
45°	2101	1991	1977
50°	2015	1905	1877
55°	1924	1806	1783
60°	1822	1689	1676
65°	1709	1567	1550
70°	1566	1418	1413
75°	1370	1240	1282
80°	1132	1011	1041
85°	765	639	654

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2101 cd/sqm

TEST NUMBER: P906200

CATALOG NUMBER: DFN2DIP-SQ2F0-030D040US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	109.9	1.7
10°-20°	309.1	4.7
20°-30°	454.3	7.0
30°-40°	527.6	8.1
40°-50°	527.0	8.1
50°-60°	459.5	7.1
60°-70°	339.7	5.2
70°-80°	192.2	3.0
80°-90°	54.3	0.8
90°-100°	78.3	1.2
100°-110°	248.7	3.8
110°-120°	425.6	6.5
120°-130°	559.8	8.6
130°-140°	628.3	9.7
140°-150°	616.2	9.5
150°-160°	516.9	7.9
160°-170°	342.8	5.3
170°-180°	119.8	1.8
0°-30°	873.3	13.4
0°-40°	1400.9	21.5
0°-60°	2387.4	36.7
0°-90°	2973.6	45.7
90°-120°	752.7	11.6
90°-150°	2556.9	39.3
90°-180°	3536.0	54.3
0°-180°	6510.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1167	1167	1167	1167	1167	
5°	1167	1163	1150	1160	1157	111
15°	1111	1105	1090	1094	1089	313
25°	1006	997	978	980	978	463
35°	868	856	838	832	826	542
45°	706	698	681	669	664	545
55°	534	528	514	501	495	478
65°	360	354	342	332	327	356
75°	188	186	181	174	176	201
85°	46	45	44	40	39	51
90°	1	14	37	35	36	6
95°	56	66	68	68	66	62
105°	230	233	235	237	237	242
115°	427	433	431	430	427	422
125°	621	631	628	624	623	555
135°	804	815	818	816	814	621
145°	976	983	989	990	986	610
155°	1116	1119	1122	1127	1124	513
165°	1214	1212	1212	1220	1215	342
175°	1263	1260	1257	1265	1259	120
180°	1265	1265	1265	1265	1265	

TEST NUMBER: P906200

CATALOG NUMBER: DFN2DIP-SQ2F0-030D040US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1167.3	1167.3	1167.3	1167.3	1167.3
2.5°	1174.1	1168.5	1156.1	1167.3	1165.2
5°	1167.3	1162.9	1150.5	1159.5	1157.3
7.5°	1159.5	1152.8	1140.4	1149.5	1147.2
10°	1147.2	1139.3	1125.9	1134.8	1131.5
12.5°	1130.3	1123.6	1110.2	1115.7	1113.5
15°	1111.2	1104.6	1089.9	1094.4	1088.8
17.5°	1087.6	1081.0	1066.3	1071.9	1066.3
20°	1061.8	1055.1	1039.4	1042.7	1038.3
22.5°	1036.1	1026.0	1011.3	1011.3	1009.0
25°	1005.7	996.8	977.7	979.9	977.7
27.5°	972.0	964.1	949.6	946.3	940.7
30°	938.4	929.4	912.6	909.2	904.7
32.5°	902.5	895.8	877.8	871.0	866.5
35°	867.7	856.5	838.5	831.7	826.1
37.5°	828.4	818.3	800.3	792.4	786.8
40°	788.0	779.0	761.0	751.0	746.5
42.5°	748.7	739.7	721.8	710.5	703.8
45°	706.1	698.2	681.3	669.0	664.5
47.5°	664.5	656.7	638.7	626.3	619.6
50°	620.7	615.1	599.4	583.7	578.1
52.5°	578.1	570.2	555.7	543.3	535.4
55°	534.4	527.6	514.1	500.7	495.1
57.5°	490.5	484.9	470.3	456.8	452.3
60°	446.7	442.3	426.6	414.2	410.9
62.5°	404.1	396.2	385.0	373.8	369.3
65°	360.4	353.6	342.4	332.3	326.7
67.5°	315.5	309.8	299.7	291.9	287.4
70°	273.9	269.4	259.3	251.4	247.0
72.5°	231.3	226.7	221.1	213.3	210.0
75°	188.5	186.4	180.7	174.0	176.3
77.5°	150.4	145.9	143.6	140.3	137.0
80°	112.3	111.1	108.8	105.5	103.3
82.5°	76.3	76.3	75.3	70.7	70.7
85°	46.0	44.9	43.8	40.4	39.3
87.5°	20.2	18.0	15.7	12.4	11.2
90°	1.1	13.7	37.4	35.1	36.2
92.5°	23.6	32.0	33.2	34.3	34.3
95°	55.7	66.4	68.3	68.3	66.4
97.5°	92.7	102.6	106.8	106.8	106.8
100°	135.4	144.2	147.2	147.2	146.1
102.5°	180.4	186.9	191.1	192.2	191.1
105°	229.6	232.6	234.9	236.8	236.8
107.5°	278.4	283.0	283.0	283.7	278.4
110°	325.7	331.8	331.8	331.8	328.8

TEST NUMBER: P906200

CATALOG NUMBER: DFN2DIP-SQ2F0-030D040US835-FLLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	376.8	383.3	382.1	379.1	376.8
115°	427.1	433.3	431.3	430.2	427.1
117.5°	477.1	485.5	480.2	477.1	474.1
120°	527.5	535.8	527.5	527.5	524.0
122.5°	573.2	583.9	578.6	575.5	573.2
125°	621.3	630.8	627.8	624.3	623.2
127.5°	668.2	680.0	675.8	671.2	668.2
130°	712.0	725.8	723.9	721.6	717.4
132.5°	761.2	771.9	772.7	767.3	764.3
135°	803.6	815.4	817.7	816.5	813.5
137.5°	850.9	860.4	862.3	861.5	857.0
140°	892.4	902.0	907.3	907.3	903.1
142.5°	935.2	944.7	947.7	948.9	944.7
145°	975.6	983.2	989.3	990.5	986.3
147.5°	1011.8	1021.3	1025.9	1027.8	1023.6
150°	1049.2	1055.7	1059.9	1063.3	1059.9
152.5°	1082.4	1088.8	1094.2	1098.4	1094.2
155°	1115.5	1118.6	1122.0	1127.4	1123.9
157.5°	1144.2	1146.4	1148.3	1156.0	1150.6
160°	1169.7	1172.0	1173.1	1179.6	1175.0
162.5°	1193.3	1193.3	1194.5	1201.7	1196.4
165°	1213.6	1212.4	1212.4	1220.0	1214.7
167.5°	1231.9	1228.4	1228.4	1236.1	1230.7
170°	1245.6	1242.5	1241.4	1249.0	1242.5
172.5°	1255.1	1252.1	1250.9	1258.6	1252.1
175°	1262.8	1259.7	1257.4	1265.0	1258.6
177.5°	1267.0	1263.9	1261.6	1268.1	1261.6
180°	1265.0	1265.0	1265.0	1265.0	1265.0

TEST NUMBER: P906200

CATALOG NUMBER: DFN2DIP-SQ2F0-030D040US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.02	10.84	11.01	11.85	13.18	9.57	10.40	10.57	11.40	12.73
	3H	11.65	12.39	12.66	13.41	14.76	11.16	11.90	12.17	12.92	14.27
	4H	12.23	12.93	13.24	13.94	15.31	11.73	12.43	12.75	13.45	14.81
	6H	12.61	13.26	13.64	14.28	15.65	12.11	12.76	13.14	13.78	15.15
	8H	12.71	13.32	13.74	14.36	15.73	12.21	12.82	13.24	13.86	15.23
	12H	12.75	13.33	13.78	14.36	15.76	12.24	12.82	13.28	13.85	15.25
4H	2H	10.46	11.16	11.49	12.18	13.54	10.11	10.81	11.13	11.82	13.18
	3H	12.30	12.89	13.33	13.93	15.31	11.89	12.48	12.93	13.52	14.90
	4H	13.00	13.53	14.04	14.57	15.97	12.58	13.11	13.61	14.15	15.54
	6H	13.49	13.95	14.54	15.01	16.41	13.06	13.52	14.11	14.58	15.97
	8H	13.63	14.06	14.68	15.12	16.52	13.20	13.63	14.25	14.68	16.09
	12H	13.69	14.08	14.76	15.15	16.56	13.25	13.64	14.32	14.70	16.12
8H	4H	13.18	13.61	14.23	14.66	16.07	12.80	13.23	13.85	14.29	15.69
	6H	13.79	14.14	14.86	15.24	16.64	13.40	13.76	14.48	14.85	16.26
	8H	13.99	14.31	15.07	15.38	16.81	13.60	13.91	14.68	14.99	16.42
	12H	14.11	14.39	15.19	15.46	16.92	13.70	13.98	14.78	15.05	16.51
12H	4H	13.16	13.55	14.23	14.62	16.03	12.79	13.18	13.86	14.25	15.66
	6H	13.81	14.12	14.89	15.20	16.63	13.44	13.75	14.52	14.83	16.25
	8H	14.04	14.31	15.12	15.39	16.85	13.65	13.93	14.74	15.00	16.47