

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903772

Luminaire Tested: DFN2DIP-SQ3F0-080D080US830-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903772
REPORT IS A COMBINATION OF REPORTS P899941 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-080D080US830-FLLFLL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14138.1 lumens
Efficiency: N/A
Efficacy: 103.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 136.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903772

CATALOG NUMBER: DFN2DIP-SQ3F0-080D080US830-FLLFLL

Luminous Intensity Polar Plot

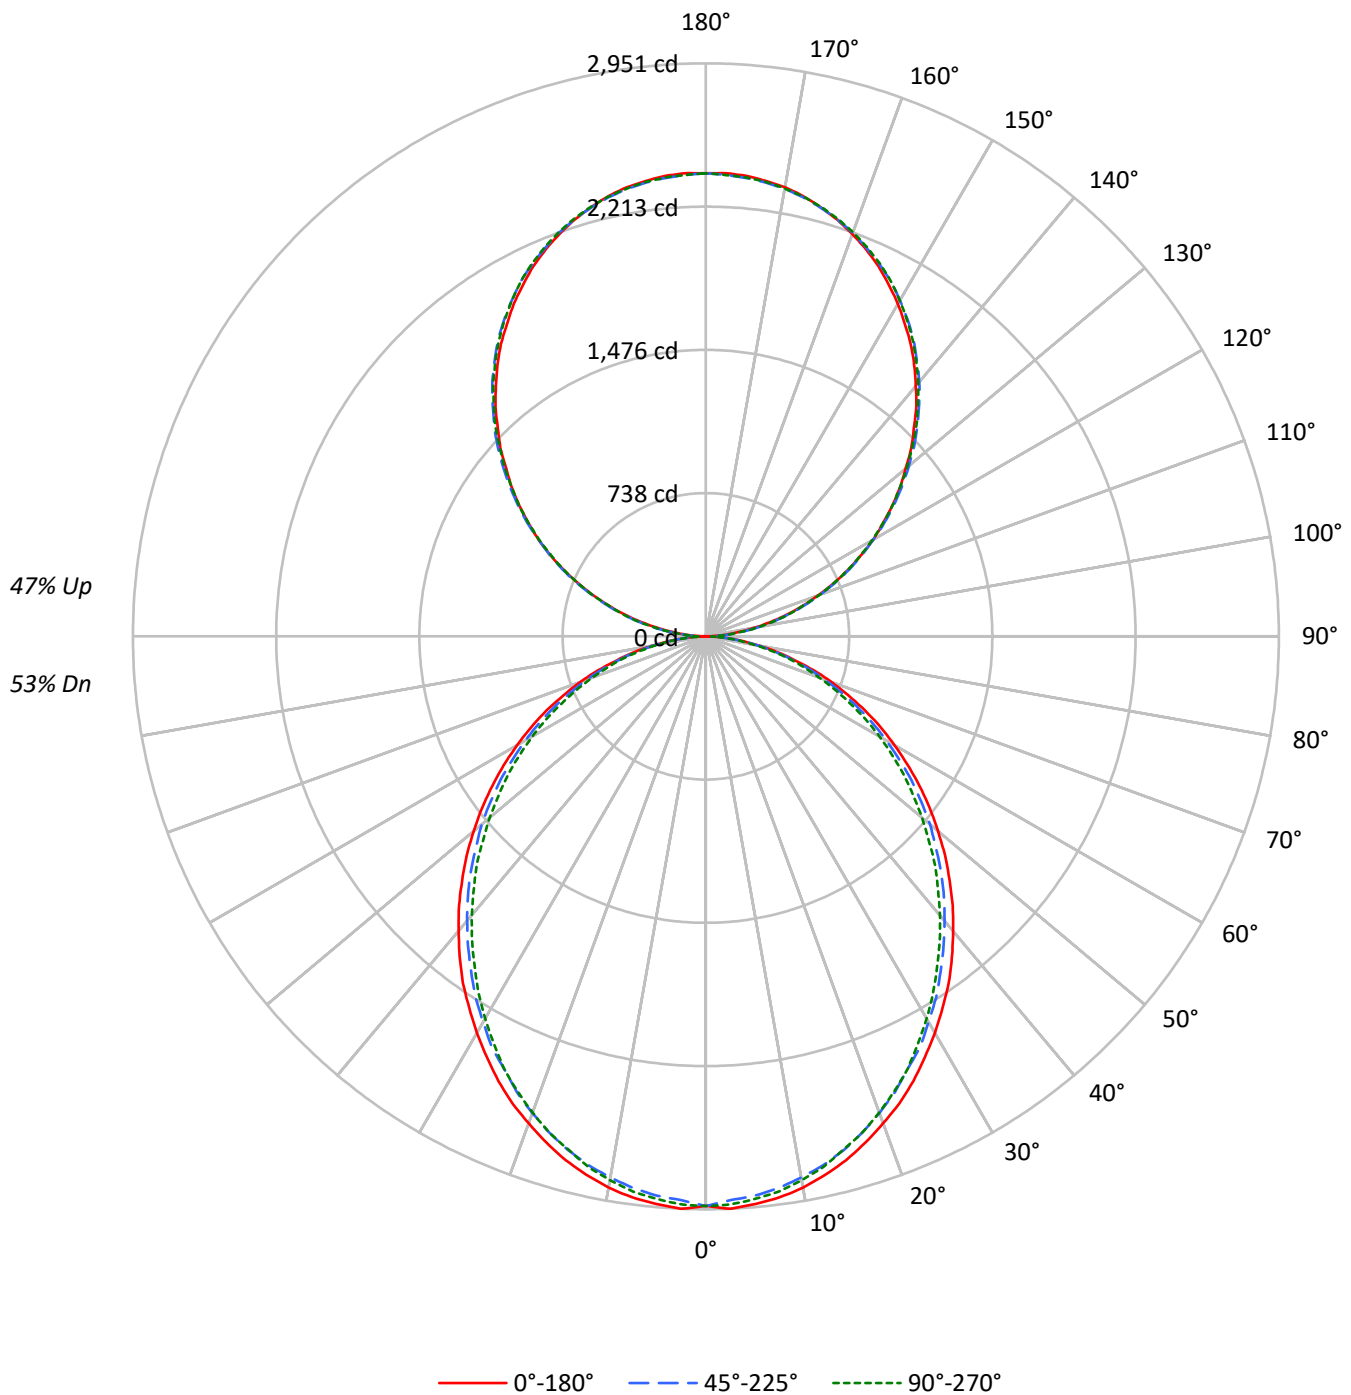

TEST NUMBER: P903772

CATALOG NUMBER: DFN2DIP-SQ3F0-080D080US830-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3362	3362	3362
5°	3365	3313	3336
10°	3336	3266	3290
15°	3284	3210	3218
20°	3216	3133	3145
25°	3148	3041	3060
30°	3063	2956	2953
35°	2982	2856	2840
40°	2884	2754	2731
45°	2785	2652	2621
50°	2677	2545	2493
55°	2563	2422	2375
60°	2435	2275	2240
65°	2295	2123	2080
70°	2116	1938	1909
75°	1870	1715	1748
80°	1572	1431	1445
85°	1107	949	946

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2785 cd/sqm

TEST NUMBER: P903772

CATALOG NUMBER: DFN2DIP-SQ3F0-080D080US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.1	2.0
10°-20°	777.0	5.5
20°-30°	1141.8	8.1
30°-40°	1326.2	9.4
40°-50°	1324.5	9.4
50°-60°	1155.0	8.2
60°-70°	853.8	6.0
70°-80°	483.0	3.4
80°-90°	134.3	0.9
90°-100°	147.6	1.0
100°-110°	468.9	3.3
110°-120°	802.4	5.7
120°-130°	1055.3	7.5
130°-140°	1184.5	8.4
140°-150°	1161.5	8.2
150°-160°	974.4	6.9
160°-170°	646.2	4.6
170°-180°	225.9	1.6
0°-30°	2195.0	15.5
0°-40°	3521.1	24.9
0°-60°	6000.6	42.4
0°-90°	7471.7	52.8
90°-120°	1418.8	10.0
90°-150°	4820.1	34.1
90°-180°	6666.0	47.1
0°-180°	14138.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2934	2934	2934	2934	2934	
5°	2934	2923	2892	2914	2909	279
15°	2793	2776	2739	2751	2737	787
25°	2528	2505	2458	2463	2458	1163
35°	2181	2153	2108	2090	2076	1362
45°	1775	1755	1712	1682	1670	1370
55°	1343	1326	1292	1258	1244	1201
65°	906	889	860	835	821	896
75°	474	468	454	437	443	506
85°	116	113	110	102	99	129
90°	2	26	70	66	68	14
95°	105	125	129	129	125	117
105°	433	439	443	446	446	457
115°	805	817	813	811	805	796
125°	1171	1189	1183	1177	1175	1047
135°	1515	1537	1541	1539	1534	1171
145°	1839	1853	1865	1867	1859	1149
155°	2103	2109	2115	2125	2119	968
165°	2288	2286	2286	2300	2290	645
175°	2380	2375	2370	2385	2372	226
180°	2385	2385	2385	2385	2385	

TEST NUMBER: P903772

CATALOG NUMBER: DFN2DIP-SQ3F0-080D080US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2933.9	2933.9	2933.9	2933.9	2933.9
2.5°	2951.0	2937.0	2905.9	2933.9	2928.6
5°	2933.9	2922.9	2891.8	2914.2	2908.9
7.5°	2914.2	2897.5	2866.4	2889.1	2883.4
10°	2883.4	2863.6	2829.8	2852.2	2843.9
12.5°	2840.9	2824.1	2790.3	2804.3	2798.7
15°	2793.0	2776.3	2739.4	2750.8	2736.8
17.5°	2733.7	2717.0	2680.1	2694.3	2680.1
20°	2668.8	2652.0	2612.5	2620.9	2609.8
22.5°	2604.2	2578.7	2541.8	2541.8	2536.2
25°	2527.8	2505.4	2457.5	2462.9	2457.5
27.5°	2443.1	2423.4	2386.8	2378.4	2364.4
30°	2358.7	2335.9	2293.8	2285.4	2274.0
32.5°	2268.3	2251.5	2206.3	2189.2	2177.9
35°	2180.9	2152.8	2107.5	2090.5	2076.4
37.5°	2082.1	2056.6	2011.5	1991.7	1977.6
40°	1980.7	1957.8	1912.7	1887.5	1876.1
42.5°	1881.9	1859.1	1814.2	1785.7	1769.1
45°	1774.7	1754.9	1712.4	1681.6	1670.3
47.5°	1670.3	1650.5	1605.2	1574.1	1557.4
50°	1560.1	1546.1	1506.5	1467.0	1452.9
52.5°	1452.9	1433.1	1396.7	1365.6	1345.8
55°	1343.0	1326.0	1292.2	1258.4	1244.3
57.5°	1232.9	1218.9	1182.0	1148.2	1136.8
60°	1122.8	1111.7	1072.1	1041.0	1032.6
62.5°	1015.6	995.9	967.7	939.6	928.2
65°	905.8	888.7	860.5	835.1	821.0
67.5°	792.9	778.5	753.4	733.7	722.3
70°	688.4	677.0	651.7	631.9	620.8
72.5°	581.3	570.0	555.8	536.1	527.7
75°	473.8	468.4	454.1	437.3	443.0
77.5°	378.1	366.6	361.0	352.6	344.2
80°	282.3	279.3	273.6	265.2	259.5
82.5°	191.9	191.9	189.2	177.8	177.8
85°	115.6	112.8	110.2	101.5	98.8
87.5°	50.9	45.2	39.5	31.1	28.2
90°	2.2	25.9	70.5	66.2	68.3
92.5°	44.6	60.4	62.6	64.7	64.7
95°	105.0	125.1	128.7	128.7	125.1
97.5°	174.7	193.4	201.3	201.3	201.3
100°	255.2	271.7	277.5	277.5	275.3
102.5°	340.1	352.3	360.1	362.3	360.1
105°	432.8	438.6	442.9	446.5	446.5
107.5°	524.8	533.5	533.5	534.9	524.8
110°	614.0	625.5	625.5	625.5	619.7

TEST NUMBER: P903772

CATALOG NUMBER: DFN2DIP-SQ3F0-080D080US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	710.3	722.6	720.4	714.6	710.3
115°	805.2	816.7	813.1	811.0	805.2
117.5°	899.4	915.2	905.1	899.4	893.6
120°	994.3	1010.1	994.3	994.3	987.8
122.5°	1080.5	1100.7	1090.6	1084.9	1080.5
125°	1171.1	1189.1	1183.4	1176.9	1174.8
127.5°	1259.6	1281.9	1273.9	1265.4	1259.6
130°	1342.3	1368.1	1364.5	1360.3	1352.4
132.5°	1435.0	1455.1	1456.6	1446.5	1440.8
135°	1514.8	1537.1	1541.4	1539.3	1533.5
137.5°	1603.9	1621.9	1625.5	1624.1	1615.4
140°	1682.3	1700.3	1710.3	1710.3	1702.4
142.5°	1762.8	1780.8	1786.6	1788.8	1780.8
145°	1839.1	1853.4	1864.9	1867.1	1859.2
147.5°	1907.3	1925.3	1933.9	1937.6	1929.7
150°	1977.8	1990.0	1997.9	2004.4	1997.9
152.5°	2040.3	2052.6	2062.7	2070.6	2062.7
155°	2102.9	2108.7	2115.2	2125.2	2118.7
157.5°	2156.8	2161.2	2164.7	2179.1	2169.1
160°	2205.0	2209.3	2211.5	2223.6	2215.1
162.5°	2249.6	2249.6	2251.7	2265.4	2255.3
165°	2287.6	2285.5	2285.5	2299.9	2289.8
167.5°	2322.1	2315.7	2315.7	2330.1	2320.0
170°	2348.1	2342.3	2340.1	2354.6	2342.3
172.5°	2366.1	2360.3	2358.1	2372.5	2360.3
175°	2380.4	2374.6	2370.3	2384.7	2372.5
177.5°	2388.3	2382.6	2378.2	2390.5	2378.2
180°	2384.7	2384.7	2384.7	2384.7	2384.7

TEST NUMBER: P903772

CATALOG NUMBER: DFN2DIP-SQ3F0-080D080US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.71	12.60	12.64	13.55	14.78	11.26	12.15	12.20	13.10	14.33
	3H	13.37	14.16	14.31	15.12	16.37	12.88	13.67	13.82	14.63	15.88
	4H	13.95	14.71	14.91	15.67	16.93	13.46	14.21	14.42	15.18	16.44
	6H	14.35	15.04	15.32	16.01	17.29	13.85	14.54	14.82	15.51	16.79
	8H	14.45	15.12	15.43	16.10	17.37	13.95	14.61	14.93	15.60	16.87
	12H	14.50	15.13	15.48	16.11	17.41	13.99	14.62	14.97	15.60	16.90
4H	2H	12.17	12.92	13.13	13.89	15.15	11.81	12.57	12.78	13.53	14.79
	3H	14.03	14.66	15.01	15.65	16.93	13.62	14.25	14.60	15.25	16.52
	4H	14.74	15.32	15.73	16.30	17.61	14.32	14.89	15.30	15.88	17.18
	6H	15.26	15.75	16.25	16.76	18.06	14.82	15.32	15.82	16.33	17.63
	8H	15.40	15.87	16.40	16.87	18.18	14.97	15.43	15.96	16.43	17.75
	12H	15.48	15.89	16.49	16.91	18.23	15.03	15.44	16.04	16.46	17.78
8H	4H	14.94	15.40	15.93	16.40	17.72	14.56	15.02	15.56	16.03	17.34
	6H	15.56	15.95	16.59	16.99	18.30	15.18	15.56	16.20	16.61	17.92
	8H	15.78	16.12	16.81	17.15	18.48	15.39	15.73	16.42	16.76	18.09
	12H	15.91	16.21	16.94	17.23	18.61	15.50	15.80	16.53	16.82	18.20
12H	4H	14.92	15.34	15.94	16.36	17.68	14.56	14.97	15.57	15.99	17.31
	6H	15.59	15.93	16.62	16.96	18.29	15.22	15.56	16.25	16.59	17.92
	8H	15.83	16.13	16.86	17.16	18.53	15.45	15.75	16.48	16.77	18.15