

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P923611

Luminaire Tested: DFN2DIP-TR3F0-080D090US940-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P923611
REPORT IS A COMBINATION OF REPORTS P900366 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-080D090US940-RLLFLL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13166.1 lumens
Efficiency: N/A
Efficacy: 86.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 151.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P923611

CATALOG NUMBER: DFN2DIP-TR3F0-080D090US940-RLLFLL

Luminous Intensity Polar Plot

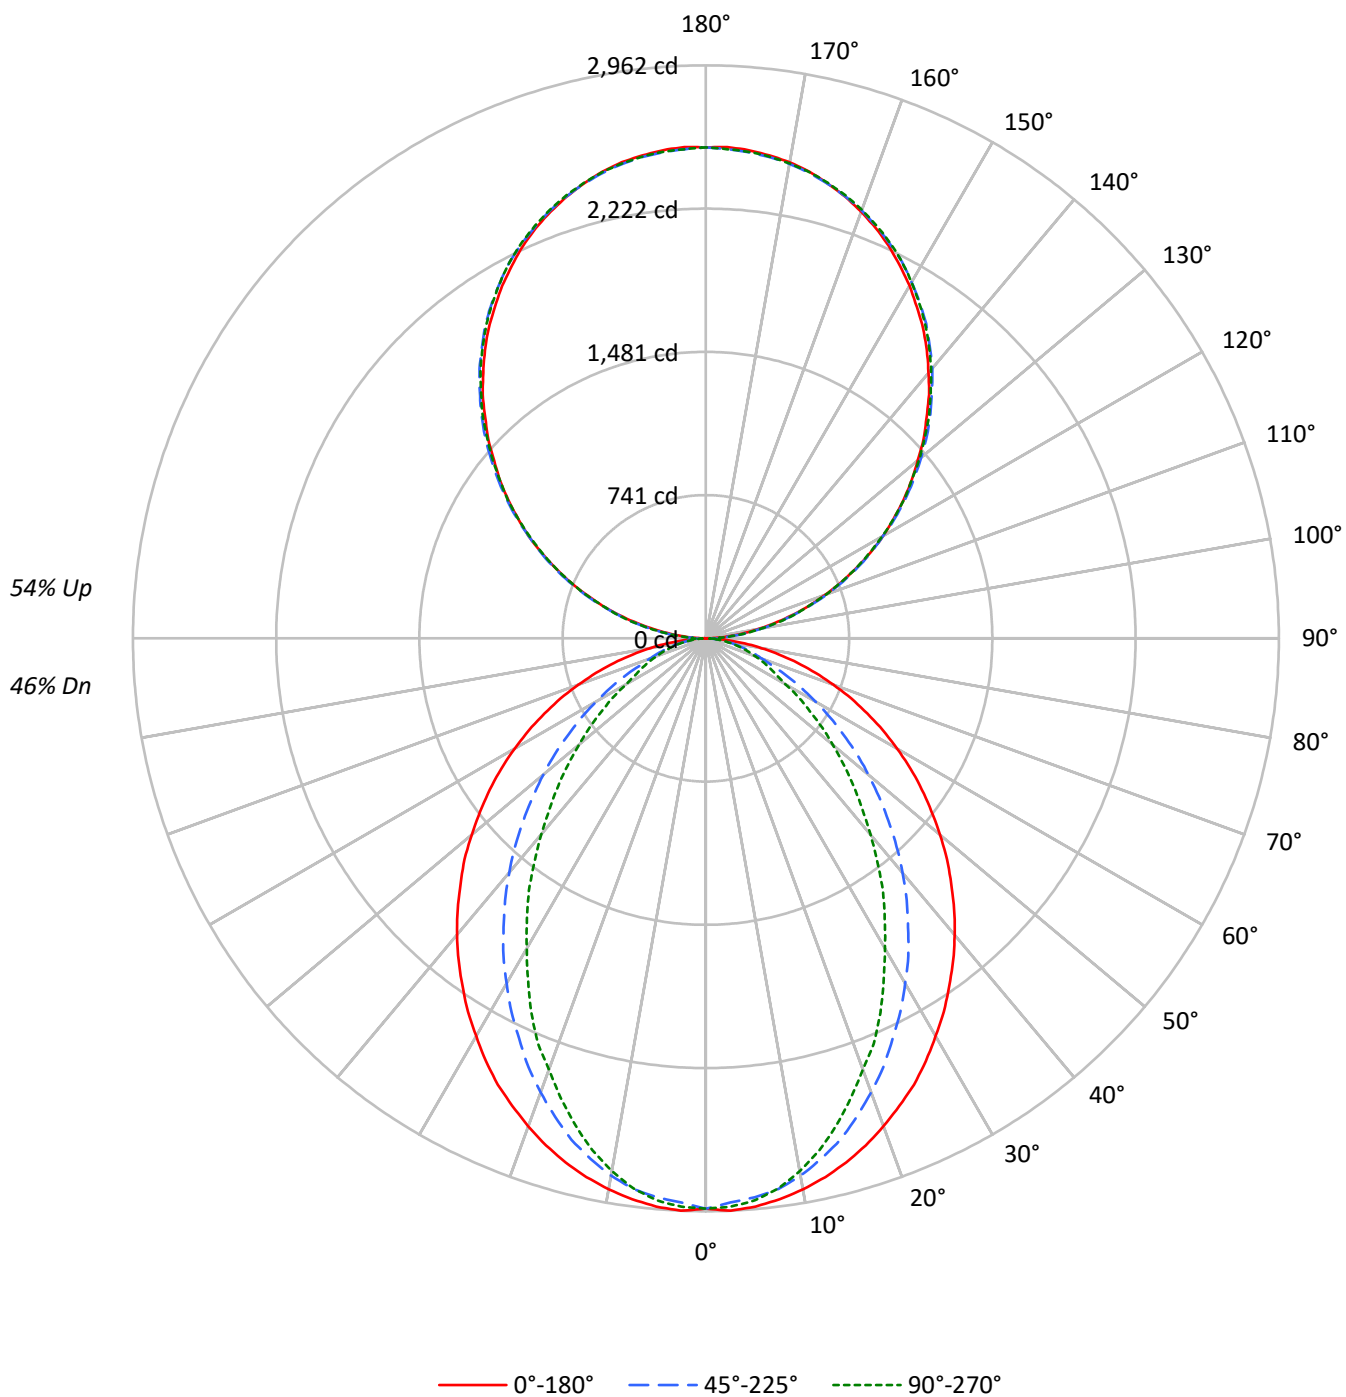

TEST NUMBER: P923611

CATALOG NUMBER: DFN2DIP-TR3F0-080D090US940-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	57	56	47	46	45
2	89	82	76	71	82	75	70	66	63	60	57	52	50	47	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	33
4	75	64	57	51	68	59	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	26	22	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3674	3674	3674
5°	3678	3613	3636
10°	3639	3539	3516
15°	3587	3419	3330
20°	3519	3255	3104
25°	3449	3071	2886
30°	3356	2883	2609
35°	3264	2682	2366
40°	3171	2474	2089
45°	3063	2243	1837
50°	2951	2010	1591
55°	2834	1762	1355
60°	2698	1503	1113
65°	2542	1240	999
70°	2352	995	901
75°	2114	871	815
80°	1769	721	698
85°	1204	466	510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3063 cd/sqm

TEST NUMBER: P923611

CATALOG NUMBER: DFN2DIP-TR3F0-080D090US940-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.3	2.1
10°-20°	758.6	5.8
20°-30°	1065.0	8.1
30°-40°	1160.9	8.8
40°-50°	1067.0	8.1
50°-60°	838.0	6.4
60°-70°	545.4	4.1
70°-80°	280.8	2.1
80°-90°	78.9	0.6
90°-100°	157.1	1.2
100°-110°	499.0	3.8
110°-120°	854.0	6.5
120°-130°	1123.1	8.5
130°-140°	1260.7	9.6
140°-150°	1236.2	9.4
150°-160°	1037.0	7.9
160°-170°	687.7	5.2
170°-180°	240.4	1.8
0°-30°	2099.9	15.9
0°-40°	3260.8	24.8
0°-60°	5165.8	39.2
0°-90°	6070.9	46.1
90°-120°	1510.1	11.5
90°-150°	5130.1	39.0
90°-180°	7095.0	53.9
0°-180°	13166.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2948	2948	2948	2948	2948	
5°	2948	2935	2900	2924	2916	280
15°	2804	2775	2684	2634	2607	790
25°	2546	2460	2284	2175	2134	1171
35°	2193	2057	1822	1654	1595	1373
45°	1793	1614	1334	1144	1081	1385
55°	1363	1155	867	707	656	1218
65°	921	704	464	374	365	913
75°	491	304	214	195	192	519
85°	115	59	51	51	51	132
90°	2	28	75	70	73	13
95°	112	133	137	137	133	124
105°	461	467	471	475	475	486
115°	857	869	865	863	857	848
125°	1246	1266	1260	1253	1250	1114
135°	1612	1636	1641	1638	1632	1246
145°	1957	1973	1985	1987	1979	1223
155°	2238	2244	2251	2262	2255	1030
165°	2435	2432	2432	2448	2437	687
175°	2534	2527	2523	2538	2525	241
180°	2538	2538	2538	2538	2538	

TEST NUMBER: P923611

CATALOG NUMBER: DFN2DIP-TR3F0-080D090US940-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2948.4	2948.4	2948.4	2948.4	2948.4
2.5°	2961.6	2948.4	2918.9	2945.8	2940.4
5°	2948.4	2935.1	2900.2	2924.3	2916.3
7.5°	2924.3	2908.4	2871.0	2881.6	2868.2
10°	2892.3	2873.6	2820.4	2812.2	2796.3
12.5°	2852.4	2828.3	2756.1	2740.2	2710.8
15°	2804.3	2774.8	2684.2	2633.6	2606.9
17.5°	2748.2	2705.4	2593.4	2534.8	2492.0
20°	2684.2	2630.7	2497.4	2430.9	2371.9
22.5°	2614.9	2553.4	2398.6	2308.0	2268.1
25°	2545.5	2460.1	2283.9	2174.7	2134.5
27.5°	2462.8	2371.9	2177.2	2051.8	1990.4
30°	2374.8	2273.1	2059.8	1923.9	1851.6
32.5°	2289.3	2166.5	1947.9	1787.7	1720.9
35°	2193.3	2057.2	1822.5	1654.4	1595.4
37.5°	2099.9	1953.0	1705.0	1520.7	1454.2
40°	2001.2	1841.2	1582.2	1392.8	1323.4
42.5°	1899.8	1729.1	1459.6	1262.0	1195.4
45°	1793.1	1614.2	1334.2	1144.5	1080.6
47.5°	1691.8	1502.4	1214.2	1024.5	965.9
50°	1579.6	1390.3	1096.7	912.4	856.6
52.5°	1470.1	1269.9	984.5	808.5	757.9
55°	1363.3	1155.3	867.1	707.1	656.5
57.5°	1254.1	1040.6	763.2	613.8	571.0
60°	1141.9	928.5	653.6	517.7	475.0
62.5°	1032.7	819.2	560.3	432.3	411.1
65°	920.6	704.3	464.2	373.7	365.4
67.5°	813.9	597.6	373.7	328.1	320.2
70°	701.8	493.7	309.4	282.8	272.1
72.5°	595.0	397.4	258.8	237.6	232.1
75°	490.9	304.1	213.5	194.7	192.3
77.5°	387.0	216.0	168.2	157.4	152.0
80°	290.7	154.9	128.0	117.4	117.4
82.5°	202.7	104.2	88.0	82.7	82.7
85°	114.7	58.6	50.6	50.6	50.6
87.5°	42.7	21.2	21.2	18.7	18.7
90°	2.3	27.6	75.0	70.4	72.7
92.5°	47.4	64.3	66.6	68.8	68.8
95°	111.7	133.1	137.0	137.0	133.1
97.5°	185.9	205.8	214.3	214.3	214.3
100°	271.6	289.3	295.3	295.3	293.1
102.5°	361.9	375.0	383.3	385.7	383.3
105°	460.7	466.7	471.4	475.2	475.2
107.5°	558.6	567.8	567.8	569.3	558.6
110°	653.4	665.8	665.8	665.8	659.6

TEST NUMBER: P923611

CATALOG NUMBER: DFN2DIP-TR3F0-080D090US940-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	756.0	769.0	766.7	760.6	756.0
115°	857.0	869.2	865.4	863.2	857.0
117.5°	957.3	974.1	963.4	957.3	951.1
120°	1058.3	1075.0	1058.3	1058.3	1051.3
122.5°	1150.0	1171.5	1160.8	1154.7	1150.0
125°	1246.5	1265.6	1259.5	1252.6	1250.4
127.5°	1340.6	1364.3	1355.9	1346.8	1340.6
130°	1428.6	1456.2	1452.3	1447.7	1439.3
132.5°	1527.3	1548.7	1550.2	1539.5	1533.5
135°	1612.2	1635.9	1640.6	1638.3	1632.2
137.5°	1707.1	1726.3	1730.1	1728.6	1719.4
140°	1790.6	1809.6	1820.3	1820.3	1812.0
142.5°	1876.2	1895.3	1901.5	1903.8	1895.3
145°	1957.4	1972.6	1984.9	1987.2	1978.8
147.5°	2030.1	2049.2	2058.3	2062.2	2053.8
150°	2105.1	2118.1	2126.5	2133.3	2126.5
152.5°	2171.6	2184.6	2195.3	2203.8	2195.3
155°	2238.2	2244.3	2251.2	2261.9	2255.0
157.5°	2295.5	2300.2	2304.0	2319.2	2308.5
160°	2346.8	2351.4	2353.8	2366.7	2357.5
162.5°	2394.2	2394.2	2396.6	2411.1	2400.4
165°	2434.8	2432.5	2432.5	2447.8	2437.1
167.5°	2471.6	2464.7	2464.7	2479.9	2469.2
170°	2499.1	2493.0	2490.7	2506.0	2493.0
172.5°	2518.2	2512.1	2509.8	2525.1	2512.1
175°	2533.5	2527.4	2522.8	2538.2	2525.1
177.5°	2541.9	2535.8	2531.2	2544.2	2531.2
180°	2538.2	2538.2	2538.2	2538.2	2538.2

TEST NUMBER: P923611

CATALOG NUMBER: DFN2DIP-TR3F0-080D090US940-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.24	12.04	12.24	13.04	14.37	7.22	8.02	8.21	9.02	10.35
	3H	12.91	13.62	13.91	14.63	15.98	8.40	9.11	9.40	10.12	11.47
	4H	13.51	14.18	14.53	15.20	16.56	8.84	9.52	9.86	10.53	11.89
	6H	13.92	14.54	14.95	15.56	16.93	9.16	9.78	10.19	10.80	12.17
	8H	14.04	14.63	15.08	15.67	17.03	9.24	9.84	10.28	10.87	12.24
	12H	14.10	14.66	15.14	15.69	17.08	9.28	9.85	10.32	10.88	12.27
4H	2H	11.25	11.93	12.28	12.94	14.30	7.80	8.48	8.83	9.49	10.85
	3H	13.07	13.63	14.10	14.67	16.05	9.14	9.71	10.18	10.75	12.12
	4H	13.75	14.27	14.79	15.30	16.70	9.69	10.20	10.73	11.24	12.63
	6H	14.26	14.70	15.31	15.76	17.15	10.10	10.54	11.15	11.60	12.99
	8H	14.43	14.84	15.48	15.89	17.29	10.22	10.63	11.27	11.69	13.09
	12H	14.51	14.89	15.58	15.95	17.36	10.28	10.65	11.35	11.72	13.13
8H	4H	13.72	14.13	14.77	15.18	16.58	9.96	10.37	11.01	11.42	12.83
	6H	14.27	14.61	15.35	15.71	17.11	10.47	10.81	11.54	11.90	13.30
	8H	14.48	14.78	15.56	15.86	17.28	10.65	10.95	11.74	12.03	13.45
	12H	14.61	14.88	15.70	15.95	17.41	10.77	11.03	11.85	12.10	13.56
12H	4H	13.67	14.04	14.74	15.11	16.51	9.96	10.33	11.03	11.40	12.81
	6H	14.25	14.55	15.33	15.62	17.04	10.51	10.81	11.60	11.89	13.31
	8H	14.46	14.72	15.54	15.79	17.26	10.72	10.98	11.80	12.05	13.51