

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P644552

Luminaire Tested: OMN4DIP-SR4F0-100D150U840-CLBOOB-1DUDD-WW

Issue Date: 2/16/2023



**Test Information**

Test Method: LM-79-2019  
Report Number: P644552  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-26, G2-2206-689-20)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/16/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: OMN4DIP-SR4F0-100D150U840-CLBOOB-1DUDD-WW  
Description: NEO-RAY CIRQUE SUSPENDED LED LUMINAIRE  
DOWNLIGHT - BATWING LENS - 1000 LUMENS PER FOOT  
UPLIGHT - BATWING OPTIC - 1500 LUMENS PER FOOT  
Light Source: 4000K CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9959.9 lumens  
Efficiency: N/A  
Efficacy: 126.9 lumens/watt  
Spacing Criteria (0/90/45): 0.99 / 1.87 / 1.75  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 78.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P644552  
CATALOG NUMBER: OMN4DIP-SR4F0-100D150U840-CLBOOB-1DUDD-WW

### Luminous Intensity Polar Plot

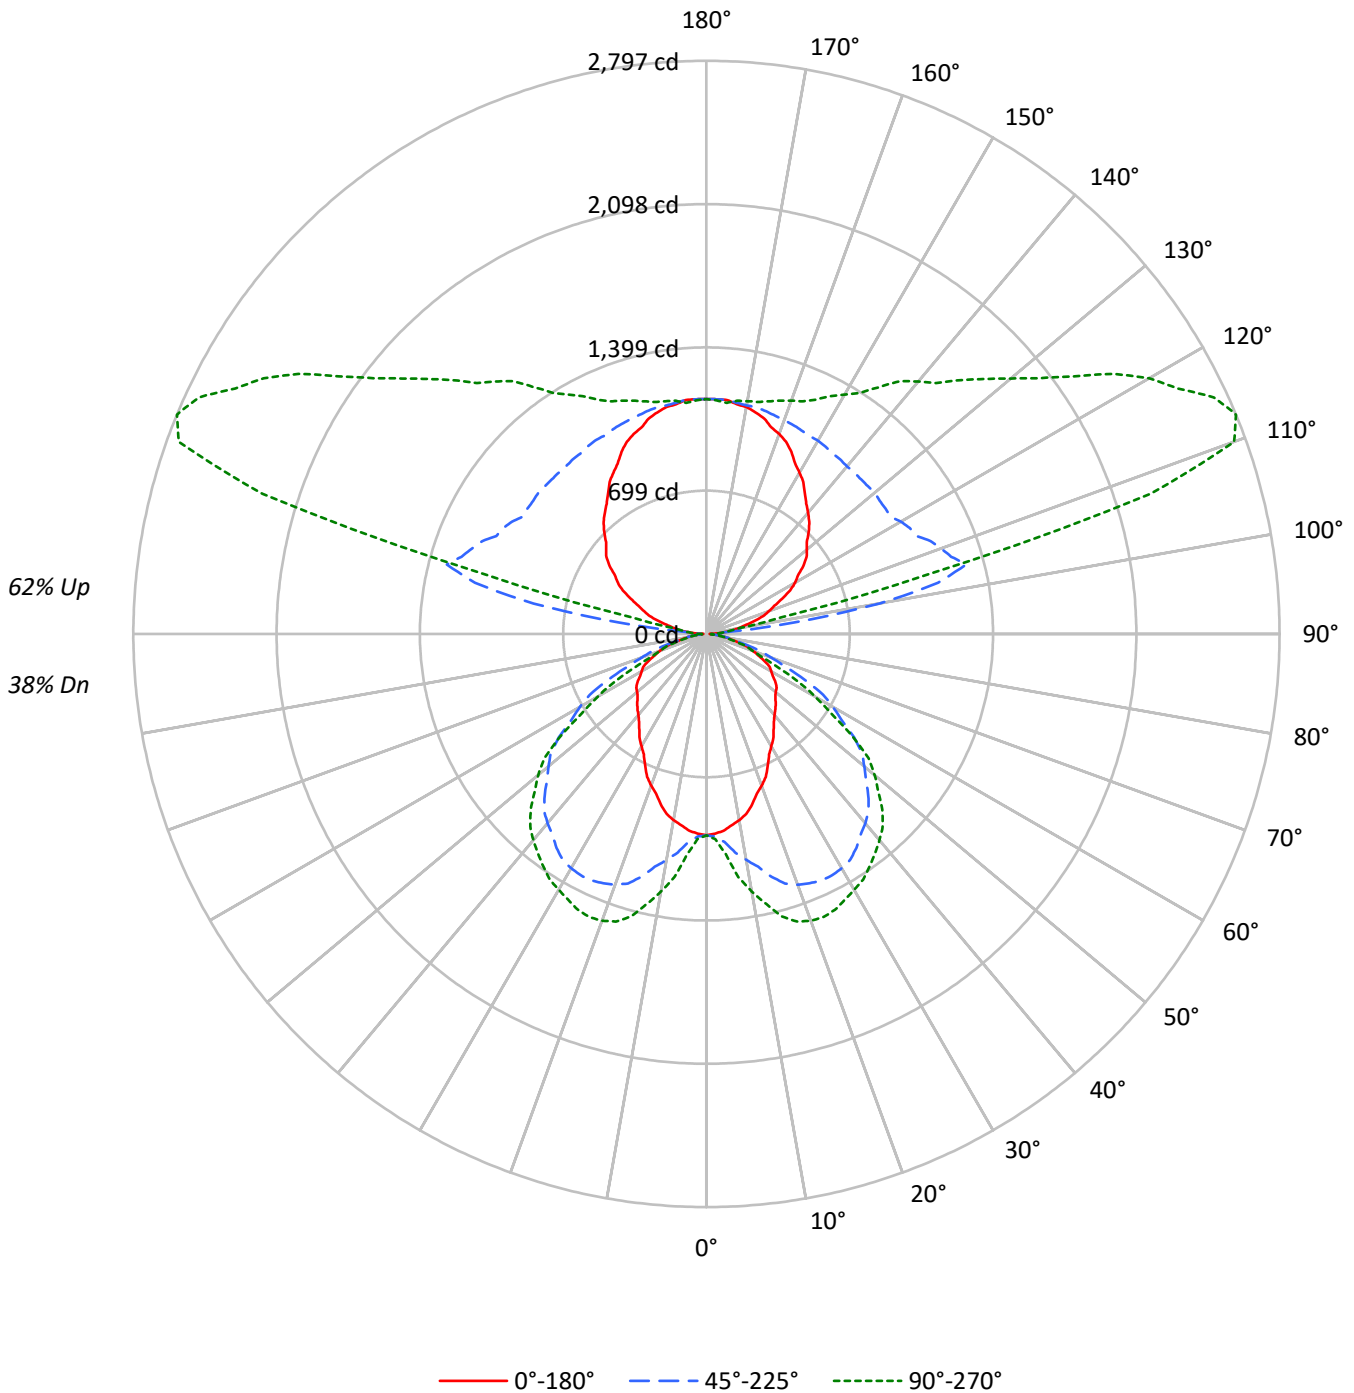



TEST NUMBER: P644552

CATALOG NUMBER: OMN4DIP-SR4F0-100D150U840-CLBOOB-1DUDD-WW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45	38
1	95	91	87	84	86	83	79	77	67	65	63	53	52	50	40	39	38	32
2	87	79	73	68	78	72	67	63	59	55	52	46	44	42	35	33	32	27
3	79	70	62	57	71	63	57	52	52	47	44	41	38	35	31	29	27	23
4	72	61	54	48	65	56	49	44	46	41	37	36	33	30	28	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	25	22	20	17
6	61	49	41	35	55	45	38	32	37	31	27	29	25	22	22	20	18	14
7	56	44	36	30	51	40	33	28	33	28	24	26	23	20	20	18	15	13
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	16	14	11
9	48	36	29	24	44	33	26	22	27	22	19	22	18	15	17	14	12	10
10	45	33	26	21	41	30	24	20	25	20	17	20	16	14	16	13	11	9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	15862	15862	15862
5°	15627	16515	17478
10°	15133	18354	20940
15°	14397	20508	23870
20°	13543	22376	25596
25°	12618	23648	26457
30°	11800	24621	26878
35°	11259	25129	27334
40°	10884	25425	27689
45°	10903	25510	27702
50°	11077	25252	26914
55°	11578	24760	24439
60°	11806	23018	19846
65°	11958	20164	14579
70°	11434	15857	11325
75°	10262	11828	9551
80°	8712	9345	7652
85°	8466	7614	6354

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 27702 cd/sqm



TEST NUMBER: P644552

CATALOG NUMBER: OMN4DIP-SR4F0-100D150U840-CLBOOB-1DUDD-WW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	100.8	1.0
10°-20°	334.8	3.4
20°-30°	556.3	5.6
30°-40°	701.7	7.0
40°-50°	750.2	7.5
50°-60°	662.1	6.6
60°-70°	425.0	4.3
70°-80°	188.4	1.9
80°-90°	51.4	0.5
90°-100°	153.8	1.5
100°-110°	1012.5	10.2
110°-120°	1369.7	13.8
120°-130°	1113.7	11.2
130°-140°	892.9	9.0
140°-150°	703.6	7.1
150°-160°	514.5	5.2
160°-170°	319.6	3.2
170°-180°	109.0	1.1
0°-30°	991.9	10.0
0°-40°	1693.6	17.0
0°-60°	3105.9	31.2
0°-90°	3770.7	37.9
90°-120°	2536.0	25.5
90°-150°	5246.2	52.7
90°-180°	6189.0	62.1
0°-180°	9959.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	982	982	982	982	982	
5°	964	993	1019	1054	1078	91
15°	861	993	1227	1374	1428	241
25°	708	961	1327	1452	1485	326
35°	571	877	1275	1358	1387	359
45°	478	750	1117	1186	1213	369
55°	411	590	880	884	868	365
65°	313	396	528	428	382	306
75°	164	182	190	162	153	176
85°	46	39	41	36	34	48
90°	16	23	28	35	31	13
95°	83	123	69	72	84	83
105°	240	357	1312	1669	1103	254
115°	408	490	1132	2340	2732	405
125°	576	654	1067	1856	2192	512
135°	706	784	1067	1526	1752	544
145°	836	907	1074	1330	1471	525
155°	980	1016	1096	1205	1262	450
165°	1089	1103	1125	1154	1175	306
175°	1146	1153	1146	1139	1132	108
180°	1146	1146	1146	1146	1146	



TEST NUMBER: P644552

CATALOG NUMBER: OMN4DIP-SR4F0-100D150U840-CLBOOB-1DUDD-WW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	982.4	982.4	982.4	982.4	982.4
2.5°	975.1	989.4	989.8	995.4	1002.5
5°	964.2	993.2	1019.0	1053.8	1078.4
7.5°	941.3	993.1	1075.7	1156.5	1196.7
10°	923.0	994.5	1119.5	1228.0	1277.2
12.5°	899.3	994.0	1163.4	1294.0	1350.3
15°	861.3	993.2	1226.9	1374.4	1428.0
17.5°	817.5	989.1	1276.7	1424.5	1471.4
20°	788.2	984.8	1302.3	1442.7	1489.7
22.5°	755.3	975.2	1316.9	1451.8	1495.1
25°	708.3	960.7	1327.4	1451.6	1485.1
27.5°	662.1	940.0	1327.9	1433.2	1461.8
30°	632.9	923.3	1320.6	1414.9	1441.7
32.5°	607.3	904.9	1306.0	1393.0	1421.6
35°	571.2	877.2	1274.9	1357.8	1386.8
37.5°	540.1	845.7	1235.6	1316.3	1350.3
40°	516.4	820.2	1206.3	1286.9	1313.7
42.5°	498.1	793.0	1171.6	1250.3	1273.5
45°	477.5	750.1	1117.2	1186.4	1213.2
47.5°	455.6	705.8	1054.6	1119.9	1137.3
50°	441.0	673.3	1005.3	1064.8	1071.5
52.5°	431.8	639.1	957.8	995.3	996.6
55°	411.3	590.0	879.6	883.8	868.2
57.5°	383.8	532.6	780.5	758.1	720.6
60°	365.6	492.9	712.8	668.2	614.6
62.5°	347.3	455.0	641.6	569.3	506.8
65°	313.0	395.7	527.8	428.5	381.6
67.5°	273.3	330.4	414.5	320.5	289.2
70°	242.2	286.9	335.9	262.2	239.9
72.5°	212.9	243.3	271.9	216.8	205.2
75°	164.5	182.4	189.6	162.0	153.1
77.5°	121.1	122.0	131.6	114.1	109.7
80°	93.7	89.2	100.5	86.7	82.3
82.5°	71.7	65.5	73.1	63.0	60.3
85°	45.7	39.0	41.1	36.5	34.3
87.5°	27.0	23.0	23.9	23.5	20.8
90°	16.0	23.0	28.1	35.2	30.8
92.5°	38.8	40.5	43.6	54.8	55.9
95°	82.8	123.2	69.1	72.0	83.9
97.5°	124.8	221.0	432.6	129.6	110.4
100°	157.5	270.7	857.6	254.9	168.1
102.5°	190.3	310.9	1157.5	663.5	362.4
105°	239.5	357.1	1311.7	1669.2	1103.0
107.5°	290.9	377.1	1252.6	2428.3	2272.4
110°	323.7	406.1	1218.0	2551.5	2739.5

TEST NUMBER: P644552

CATALOG NUMBER: OMN4DIP-SR4F0-100D150U840-CLBOOB-1DUDD-WW

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	358.3	440.7	1183.4	2479.4	2797.2
115°	407.9	490.3	1131.5	2339.8	2732.3
117.5°	460.8	542.2	1118.5	2188.7	2592.5
120°	499.4	576.9	1095.5	2073.7	2494.4
122.5°	528.2	609.6	1064.8	1974.9	2361.8
125°	576.4	653.9	1066.6	1855.5	2191.6
127.5°	615.9	696.7	1065.8	1716.6	2048.9
130°	639.0	723.6	1071.6	1622.1	1939.3
132.5°	664.2	748.8	1067.9	1580.4	1841.3
135°	706.5	784.1	1067.0	1526.3	1751.9
137.5°	742.6	825.7	1067.0	1466.4	1659.6
140°	771.4	848.9	1067.0	1431.5	1607.7
142.5°	800.2	872.1	1072.7	1390.8	1555.8
145°	836.3	906.8	1074.2	1329.7	1470.7
147.5°	879.5	941.6	1082.8	1285.7	1394.3
150°	908.4	964.8	1088.6	1256.5	1348.1
152.5°	937.2	988.0	1088.6	1233.1	1307.8
155°	980.5	1015.7	1095.8	1205.2	1261.6
157.5°	1015.1	1048.9	1104.5	1187.6	1228.5
160°	1038.1	1066.3	1110.2	1175.9	1211.2
162.5°	1055.4	1083.6	1116.0	1169.9	1193.9
165°	1088.6	1102.7	1124.7	1154.0	1175.1
167.5°	1107.4	1120.0	1131.9	1146.6	1159.3
170°	1124.7	1131.7	1131.9	1146.4	1153.5
172.5°	1130.4	1143.1	1137.6	1140.7	1147.7
175°	1146.3	1153.3	1146.3	1138.9	1131.9
177.5°	1146.3	1151.9	1146.3	1146.2	1140.5
180°	1146.3	1146.3	1146.3	1146.3	1146.3

(END OF REPORT)