

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331481-927

Luminaire Tested: **S122DIW-S290D970U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331481-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIW-S290D970U927-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 970 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4020.4 lumens  
Efficiency: N/A  
Efficacy: 105.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 38  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331481-927

CATALOG NUMBER: S122DIW-S290D970U927-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

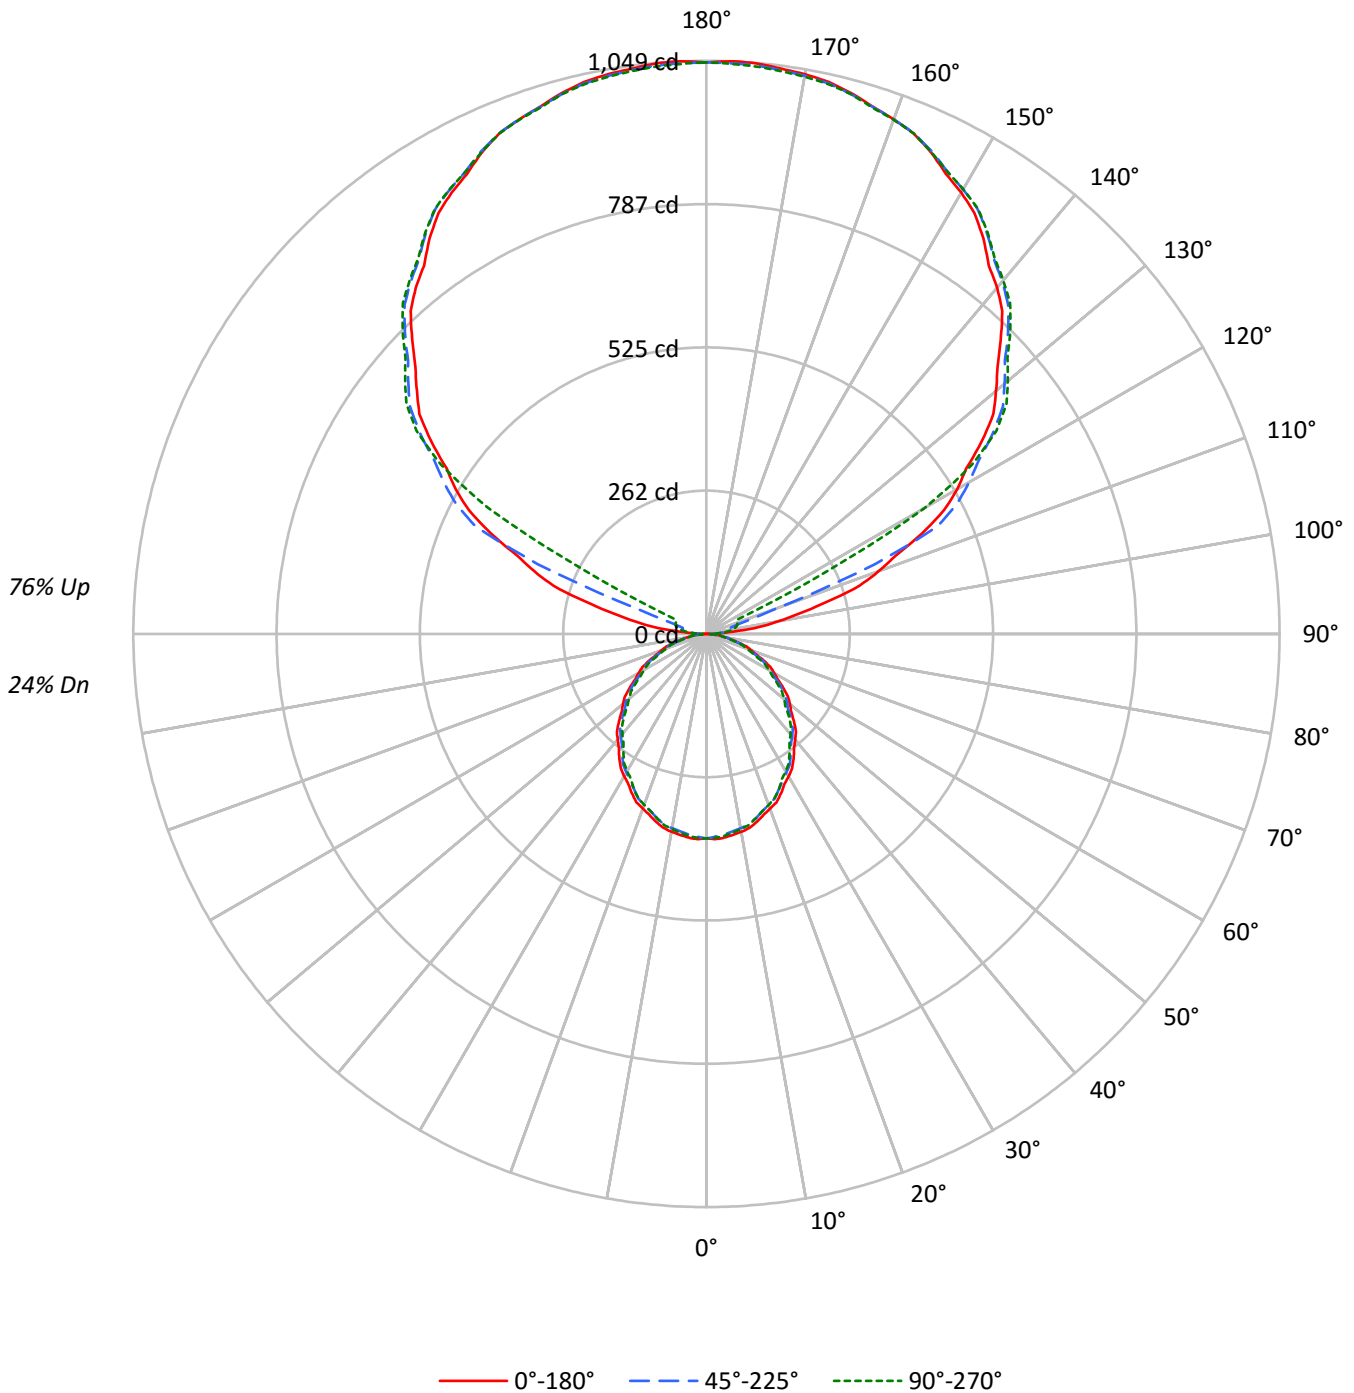



TEST NUMBER: P331481-927

CATALOG NUMBER: S122DIW-S290D970U927-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	32	32	32	24
1	92	88	84	81	82	78	75	72	60	58	56	43	42	41	28	28	27	20
2	84	77	71	66	74	68	63	59	53	49	46	38	36	34	25	24	23	17
3	76	67	60	55	67	60	54	49	46	42	39	34	31	29	22	21	19	14
4	70	59	52	46	62	53	47	42	41	37	33	30	27	25	20	18	17	12
5	64	53	45	39	56	47	41	36	37	32	28	27	24	21	18	16	14	11
6	59	47	39	34	52	42	36	31	33	28	25	24	21	19	16	14	13	9
7	54	42	35	29	48	38	31	27	30	25	21	22	19	16	15	13	11	8
8	50	38	31	26	44	34	28	23	27	22	19	20	17	14	13	11	10	7
9	46	35	28	23	41	31	25	21	25	20	17	18	15	13	12	10	9	7
10	43	32	25	20	38	29	23	18	23	18	15	17	14	12	11	9	8	6

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6042	6042	6042
5°	6065	5977	6015
10°	6030	5917	5946
15°	5954	5840	5835
20°	5849	5727	5720
25°	5744	5585	5585
30°	5610	5455	5407
35°	5483	5298	5219
40°	5324	5143	5044
45°	5167	4987	4864
50°	4999	4828	4657
55°	4822	4642	4467
60°	4624	4414	4253
65°	4413	4195	4000
70°	4145	3923	3734
75°	3768	3612	3525
80°	3347	3245	3078
85°	2723	2594	2334



TEST NUMBER: P331481-927

CATALOG NUMBER: S122DIW-S290D970U927-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	35.2	0.9
10°-20°	99.0	2.5
20°-30°	145.6	3.6
30°-40°	169.1	4.2
40°-50°	168.9	4.2
50°-60°	147.3	3.7
60°-70°	108.9	2.7
70°-80°	61.7	1.5
80°-90°	19.2	0.5
90°-100°	34.9	0.9
100°-110°	128.0	3.2
110°-120°	342.1	8.5
120°-130°	564.7	14.0
130°-140°	600.5	14.9
140°-150°	558.1	13.9
150°-160°	448.7	11.2
160°-170°	289.2	7.2
170°-180°	99.5	2.5
0°-30°	279.8	7.0
0°-40°	448.8	11.2
0°-60°	765.0	19.0
0°-90°	954.8	23.7
90°-120°	504.9	12.6
90°-150°	2228.2	55.4
90°-180°	3066.0	76.3
0°-180°	4020.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	374	374	374	374	374	
5°	374	373	369	372	371	35
15°	356	354	349	351	349	100
25°	322	319	314	314	314	148
35°	278	274	269	267	265	174
45°	226	224	218	215	213	175
55°	171	169	165	161	159	153
65°	116	113	110	107	105	114
75°	60	60	58	56	56	65
85°	15	14	14	13	13	17
90°	1	9	15	19	20	3
95°	49	26	30	33	33	60
105°	230	240	46	54	58	246
115°	435	448	467	133	62	428
125°	615	626	640	645	647	549
135°	762	773	780	787	786	588
145°	883	883	896	900	897	552
155°	973	967	975	979	973	448
165°	1025	1021	1023	1027	1023	289
175°	1048	1043	1045	1049	1042	100
180°	1046	1046	1046	1046	1046	



TEST NUMBER: P331481-927

CATALOG NUMBER: S122DIW-S290D970U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	374.2	374.2	374.2	374.2	374.2	374.2	374.2	374.2	374.2	374.2	374.2
2.5°	376.0	375.7	375.3	375.0	374.7	374.2	373.5	372.8	372.1	371.4	372.0
5°	374.2	373.9	373.6	373.3	373.0	372.4	371.5	370.7	369.7	368.8	369.5
7.5°	371.0	370.4	369.9	369.5	369.0	368.3	367.4	366.5	365.6	364.7	365.4
10°	367.8	367.3	366.7	366.1	365.5	364.8	363.8	362.9	361.9	360.9	361.6
12.5°	363.5	363.0	362.5	361.9	361.5	360.8	359.8	358.9	357.9	357.0	357.4
15°	356.2	355.8	355.3	354.8	354.3	353.6	352.5	351.5	350.5	349.4	349.7
17.5°	347.1	346.6	346.1	345.6	345.2	344.4	343.3	342.2	341.2	340.2	340.5
20°	340.4	339.9	339.5	339.0	338.5	337.7	336.6	335.5	334.4	333.3	333.5
22.5°	333.8	333.1	332.5	331.8	331.1	330.3	329.2	328.1	327.1	326.1	326.1
25°	322.4	321.8	321.2	320.5	319.9	318.9	317.5	316.2	314.8	313.5	313.6
27.5°	309.5	309.0	308.3	307.8	307.2	306.3	305.3	304.2	303.2	302.1	301.8
30°	300.9	300.2	299.6	299.0	298.3	297.4	296.2	295.0	293.7	292.6	292.3
32.5°	291.6	291.1	290.7	290.1	289.6	288.7	287.4	286.2	284.9	283.7	283.2
35°	278.2	277.3	276.6	275.8	275.0	273.9	272.7	271.4	270.1	268.8	268.3
37.5°	263.0	262.3	261.6	260.9	260.2	259.2	257.9	256.7	255.3	254.1	253.5
40°	252.6	252.0	251.4	250.7	250.1	249.1	247.8	246.5	245.3	244.0	243.3
42.5°	242.6	241.9	241.3	240.7	240.0	239.0	237.7	236.5	235.2	233.9	233.1
45°	226.3	225.8	225.2	224.7	224.1	223.2	222.0	220.9	219.7	218.4	217.5
47.5°	210.2	209.7	209.2	208.7	208.1	207.2	206.0	204.8	203.5	202.2	201.3
50°	199.0	198.6	198.2	197.8	197.4	196.6	195.5	194.4	193.3	192.2	191.1
52.5°	188.1	187.5	187.0	186.5	185.9	185.1	184.1	183.1	182.0	180.9	180.0
55°	171.3	170.8	170.3	169.8	169.4	168.7	167.7	166.8	165.8	164.9	163.8
57.5°	154.5	154.1	153.7	153.3	152.9	152.2	151.1	150.1	149.0	148.0	147.0
60°	143.2	142.9	142.6	142.3	142.0	141.2	140.1	139.0	137.8	136.7	135.9
62.5°	132.3	131.7	131.3	130.8	130.2	129.5	128.7	127.9	127.0	126.1	125.2
65°	115.5	115.0	114.5	114.1	113.6	113.0	112.2	111.4	110.6	109.8	109.0
67.5°	98.5	98.1	97.7	97.3	97.0	96.4	95.6	94.9	94.2	93.5	92.9
70°	87.8	87.5	87.1	86.8	86.5	86.0	85.3	84.6	83.8	83.1	82.5
72.5°	76.8	76.5	76.2	75.9	75.6	75.2	74.7	74.3	73.8	73.4	72.8
75°	60.4	60.3	60.1	60.0	59.8	59.6	59.2	58.7	58.3	57.9	57.4
77.5°	45.8	45.5	45.2	45.0	44.7	44.4	44.3	44.1	44.0	43.8	43.6
80°	36.0	35.9	35.8	35.7	35.6	35.6	35.4	35.3	35.1	34.9	34.7
82.5°	26.8	26.8	26.8	26.7	26.7	26.6	26.5	26.5	26.4	26.3	26.0
85°	14.7	14.7	14.6	14.5	14.4	14.3	14.3	14.2	14.1	14.0	13.8
87.5°	5.3	5.5	5.8	6.0	6.3	6.5	6.7	6.8	6.9	7.1	7.1
90°	0.8	2.6	4.4	6.3	8.2	9.7	11.1	12.4	13.8	15.1	16.0
92.5°	15.3	15.1	15.0	14.8	14.7	14.9	15.5	16.2	16.9	17.6	18.0
95°	49.2	43.6	38.1	32.6	27.0	24.8	26.0	27.2	28.4	29.5	30.3
97.5°	97.7	82.0	66.4	50.7	35.1	28.6	31.4	34.1	36.8	39.5	40.2
100°	134.0	110.9	87.9	64.9	41.8	31.7	34.5	37.4	40.3	43.2	44.5
102.5°	174.0	169.1	164.2	159.3	154.4	140.1	116.1	92.2	68.3	44.4	46.1
105°	230.1	235.2	240.2	245.3	250.3	229.9	183.9	138.0	92.1	46.2	48.0
107.5°	294.1	298.3	302.3	306.3	310.5	284.9	229.9	174.8	119.7	64.6	62.7
110°	335.3	338.9	342.4	345.9	349.4	326.9	278.3	229.7	181.1	132.5	115.7



TEST NUMBER: P331481-927

CATALOG NUMBER: S122DIW-S290D970U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	374.1	377.2	380.3	383.5	386.6	382.1	370.2	358.1	346.1	334.1	272.7
115°	435.2	438.1	441.0	443.9	446.7	450.2	454.4	458.6	462.9	467.1	389.1
117.5°	489.9	493.1	496.3	499.5	502.7	505.7	508.7	511.5	514.4	517.3	498.4
120°	529.9	532.4	534.9	537.4	540.0	542.7	545.7	548.8	551.8	554.8	556.9
122.5°	563.8	566.4	569.1	571.7	574.4	577.4	580.7	584.0	587.2	590.6	591.8
125°	615.4	617.6	619.8	621.9	624.2	626.9	630.0	633.3	636.4	639.6	640.8
127.5°	662.2	664.6	667.0	669.5	671.8	674.3	676.7	679.1	681.4	683.8	685.6
130°	691.9	694.6	697.3	699.9	702.6	704.9	706.7	708.6	710.4	712.3	714.2
132.5°	722.2	724.5	726.7	729.0	731.3	733.3	735.2	737.0	738.9	740.8	742.4
135°	761.5	764.2	766.9	769.6	772.3	774.4	775.9	777.4	778.9	780.5	782.1
137.5°	801.3	803.2	805.1	807.0	808.8	810.6	812.4	814.0	815.8	817.5	819.2
140°	827.4	828.7	830.0	831.4	832.7	834.3	836.1	838.0	839.9	841.8	843.3
142.5°	849.1	850.3	851.6	852.8	854.0	855.6	857.8	859.9	862.1	864.1	865.5
145°	883.4	883.2	883.0	882.9	882.7	884.1	886.9	889.8	892.6	895.5	896.7
147.5°	913.2	912.5	911.9	911.2	910.6	911.7	914.6	917.3	920.2	923.1	923.9
150°	932.6	931.4	930.2	929.1	927.9	928.6	931.3	934.0	936.7	939.4	940.4
152.5°	949.0	947.6	946.3	945.0	943.6	944.3	946.8	949.4	952.0	954.5	955.5
155°	972.7	971.1	969.6	968.1	966.6	966.9	968.9	970.9	973.0	974.9	976.0
157.5°	991.3	990.1	988.7	987.5	986.2	986.3	987.7	989.1	990.5	991.9	993.1
160°	1002.2	1001.2	1000.2	999.2	998.1	998.1	999.2	1000.2	1001.2	1002.2	1003.2
162.5°	1011.9	1010.9	1009.9	1008.8	1007.9	1007.8	1008.7	1009.6	1010.4	1011.3	1012.4
165°	1024.9	1023.9	1022.9	1021.9	1020.9	1020.6	1021.1	1021.6	1022.2	1022.6	1023.8
167.5°	1034.6	1033.6	1032.6	1031.6	1030.5	1030.3	1030.8	1031.3	1031.7	1032.2	1033.3
170°	1040.1	1039.0	1038.1	1037.0	1036.0	1035.7	1036.0	1036.3	1036.7	1037.0	1038.2
172.5°	1043.7	1042.7	1041.6	1040.7	1039.7	1039.3	1039.7	1040.0	1040.3	1040.7	1041.9
175°	1048.4	1047.2	1046.0	1044.9	1043.7	1043.2	1043.6	1043.9	1044.3	1044.6	1045.8
177.5°	1049.2	1048.2	1047.3	1046.3	1045.4	1045.0	1045.1	1045.2	1045.4	1045.5	1046.5
180°	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1



TEST NUMBER: P331481-927

CATALOG NUMBER: S122DIW-S290D970U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	374.2	374.2	374.2	374.2	374.2	374.2	374.2	374.2
2.5°	372.6	373.3	373.9	374.2	374.1	373.9	373.8	373.7
5°	370.2	370.8	371.5	371.7	371.5	371.4	371.2	371.1
7.5°	366.0	366.6	367.3	367.5	367.3	367.1	366.9	366.8
10°	362.3	362.9	363.5	363.7	363.5	363.2	363.0	362.7
12.5°	357.8	358.2	358.7	358.9	358.7	358.5	358.3	358.1
15°	350.1	350.4	350.7	350.7	350.3	349.9	349.5	349.1
17.5°	340.9	341.3	341.6	341.6	341.2	340.9	340.5	340.1
20°	333.7	334.0	334.2	334.1	333.8	333.5	333.2	332.9
22.5°	326.1	326.2	326.2	326.1	326.0	325.7	325.6	325.4
25°	313.8	313.9	314.1	314.1	313.9	313.8	313.6	313.5
27.5°	301.6	301.3	301.1	300.8	300.4	300.0	299.7	299.3
30°	292.1	291.8	291.6	291.4	291.0	290.7	290.4	290.0
32.5°	282.8	282.3	281.9	281.5	281.2	280.9	280.6	280.3
35°	267.8	267.4	266.9	266.5	266.1	265.7	265.3	264.8
37.5°	252.9	252.3	251.7	251.2	250.8	250.4	250.1	249.7
40°	242.6	241.9	241.1	240.6	240.3	240.0	239.6	239.3
42.5°	232.3	231.6	230.8	230.1	229.7	229.3	228.9	228.4
45°	216.7	215.8	214.9	214.3	214.0	213.7	213.3	213.0
47.5°	200.4	199.5	198.5	197.8	197.4	196.9	196.5	196.0
50°	190.0	188.8	187.7	187.0	186.6	186.2	185.8	185.4
52.5°	179.1	178.2	177.2	176.5	175.9	175.5	174.9	174.4
55°	162.9	161.9	161.0	160.3	159.9	159.5	159.1	158.7
57.5°	146.1	145.1	144.2	143.5	143.3	143.0	142.7	142.4
60°	135.0	134.1	133.2	132.7	132.5	132.2	132.0	131.7
62.5°	124.5	123.7	122.9	122.3	122.0	121.7	121.4	121.0
65°	108.3	107.6	106.9	106.3	105.9	105.5	105.1	104.7
67.5°	92.4	91.8	91.3	90.8	90.5	90.2	89.8	89.5
70°	82.0	81.4	80.9	80.5	80.2	79.8	79.5	79.1
72.5°	72.2	71.7	71.1	70.7	70.4	70.2	69.9	69.6
75°	57.0	56.5	56.0	55.8	56.0	56.2	56.3	56.5
77.5°	43.3	43.1	42.9	42.6	42.4	42.2	42.0	41.7
80°	34.5	34.2	34.0	33.7	33.6	33.4	33.3	33.1
82.5°	25.7	25.3	25.0	24.9	24.9	24.8	24.8	24.8
85°	13.5	13.3	13.1	12.9	12.8	12.8	12.7	12.6
87.5°	7.1	7.0	7.0	7.0	7.0	7.0	7.0	7.0
90°	16.8	17.7	18.5	19.1	19.4	19.7	20.1	20.4
92.5°	18.5	18.9	19.3	19.6	19.8	20.0	20.2	20.4
95°	31.2	32.1	32.9	33.2	33.0	32.9	32.7	32.6
97.5°	40.9	41.5	42.2	42.6	42.9	43.0	43.3	43.4
100°	45.9	47.2	48.6	49.4	49.7	50.1	50.4	50.7
102.5°	47.8	49.6	51.3	52.4	52.9	53.4	53.9	54.3
105°	49.9	51.7	53.6	54.8	55.5	56.2	56.9	57.5
107.5°	60.8	59.0	57.1	56.5	57.2	57.8	58.5	59.2
110°	98.8	82.0	65.2	57.1	57.8	58.5	59.1	59.8





TEST NUMBER: P331481-927

CATALOG NUMBER: S122DIW-S290D970U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	211.4	150.0	88.6	58.2	58.8	59.3	59.9	60.4
115°	311.2	233.4	155.5	110.5	98.4	86.3	74.1	62.1
117.5°	479.6	460.8	442.0	412.6	372.8	333.0	293.3	253.4
120°	558.9	560.9	562.9	552.5	529.9	507.2	484.4	461.8
122.5°	593.0	594.2	595.4	593.8	589.4	585.0	580.6	576.2
125°	642.0	643.2	644.4	645.2	645.7	646.2	646.7	647.2
127.5°	687.3	689.0	690.7	691.6	691.7	691.8	691.9	692.0
130°	716.0	717.9	719.7	720.6	720.3	720.2	720.0	719.9
132.5°	743.9	745.5	747.1	747.8	747.6	747.4	747.3	747.1
135°	783.8	785.4	787.1	787.8	787.5	787.1	786.8	786.5
137.5°	820.8	822.4	824.1	824.7	824.1	823.5	822.9	822.4
140°	844.8	846.3	847.8	848.1	847.3	846.4	845.6	844.8
142.5°	866.9	868.3	869.7	869.9	869.1	868.2	867.4	866.6
145°	897.9	899.0	900.2	900.4	899.5	898.7	897.9	897.0
147.5°	924.8	925.7	926.5	926.6	925.9	925.2	924.5	923.8
150°	941.4	942.4	943.4	943.5	942.7	941.8	941.0	940.2
152.5°	956.6	957.5	958.5	958.5	957.4	956.3	955.2	954.1
155°	977.0	977.9	979.0	978.8	977.5	976.1	974.8	973.4
157.5°	994.2	995.4	996.5	996.4	995.1	993.8	992.4	991.2
160°	1004.2	1005.2	1006.2	1006.2	1005.0	1003.8	1002.7	1001.5
162.5°	1013.6	1014.7	1015.9	1015.7	1014.2	1012.8	1011.4	1010.0
165°	1025.0	1026.2	1027.4	1027.4	1026.2	1025.0	1023.8	1022.6
167.5°	1034.5	1035.7	1036.9	1036.7	1035.2	1033.7	1032.2	1030.7
170°	1039.4	1040.5	1041.7	1041.6	1040.1	1038.6	1037.0	1035.5
172.5°	1043.0	1044.2	1045.4	1045.2	1043.7	1042.2	1040.7	1039.2
175°	1046.9	1048.1	1049.3	1049.1	1047.3	1045.7	1044.0	1042.4
177.5°	1047.4	1048.3	1049.2	1049.2	1047.9	1046.7	1045.5	1044.3
180°	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1

(END OF REPORT)