

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331517-927

Luminaire Tested: **S122DIW-S485D1240U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331517-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S485D1240U927-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1240 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5493.3 lumens
Efficiency: N/A
Efficacy: 102.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331517-927

CATALOG NUMBER: S122DIW-S485D1240U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

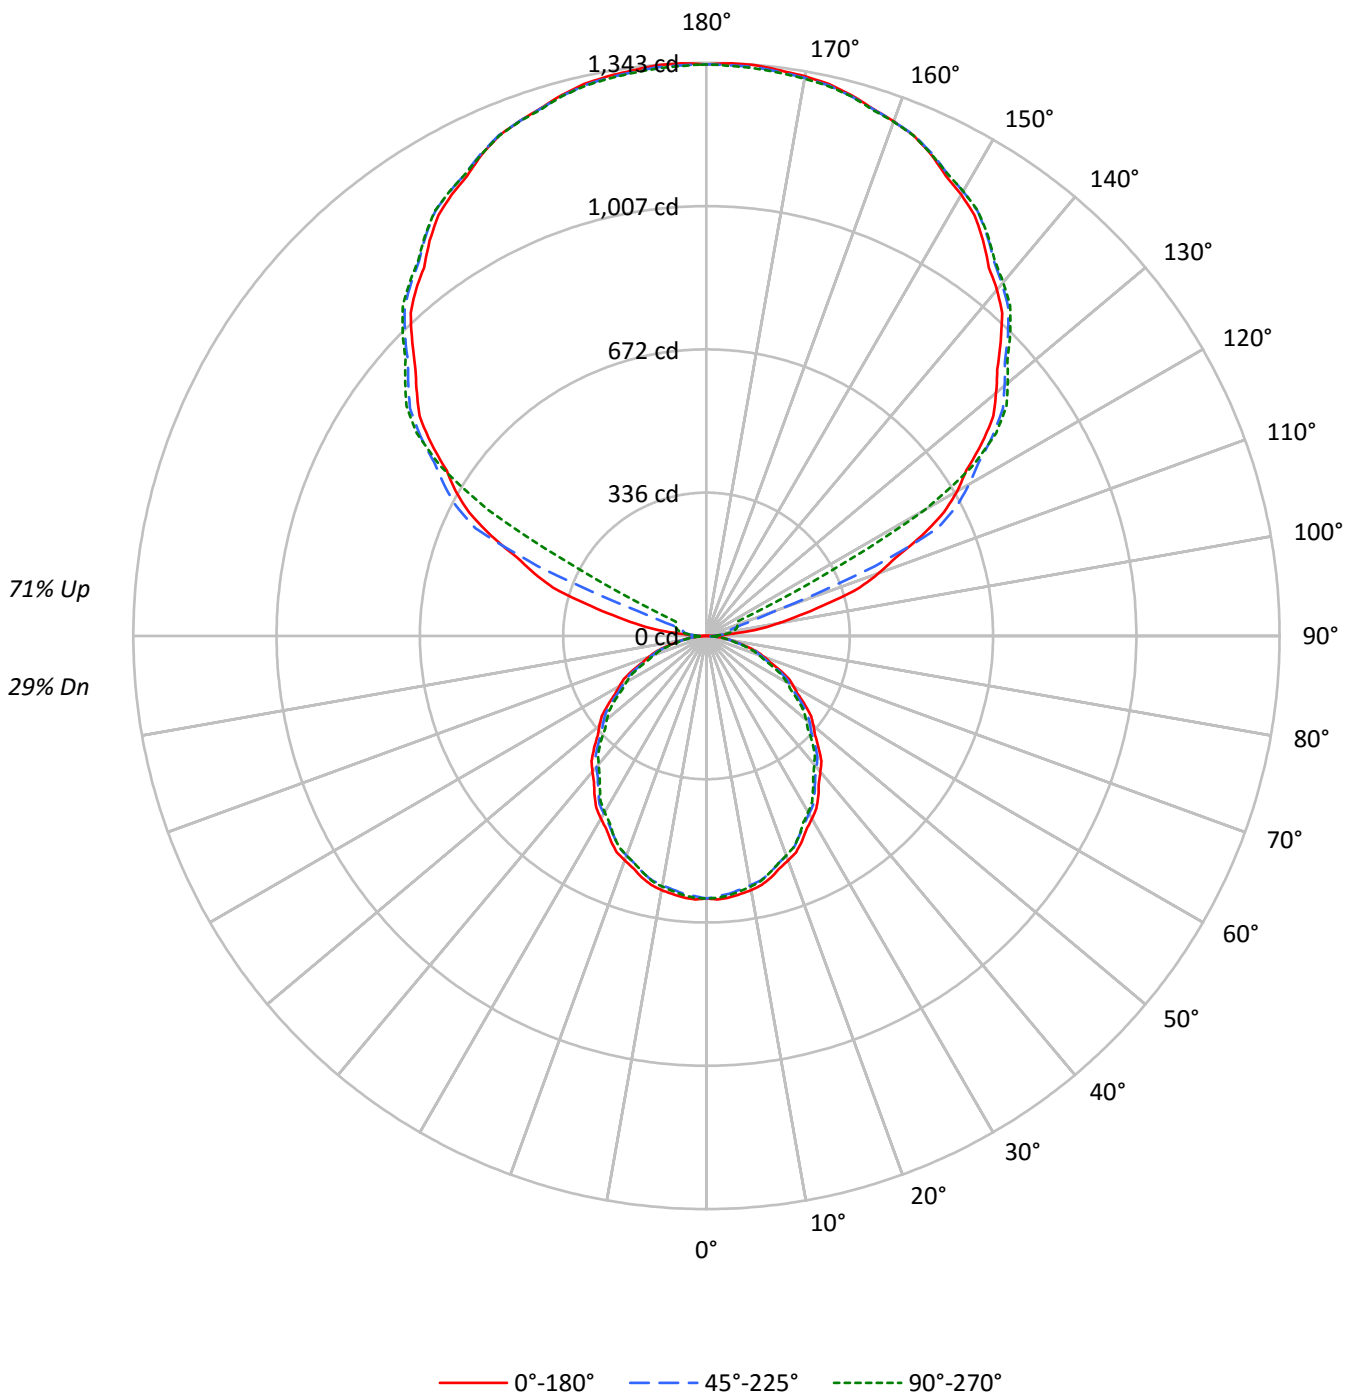



TEST NUMBER: P331517-927

CATALOG NUMBER: S122DIW-S485D1240U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	29
1	93	89	85	82	83	80	76	74	62	60	58	47	45	44	32	31	31	24
2	85	77	72	67	75	70	65	60	55	51	48	41	39	37	28	27	26	20
3	77	68	61	55	69	61	55	50	48	44	41	36	33	31	25	23	22	17
4	70	60	52	47	63	54	48	43	43	38	34	32	29	27	22	20	19	15
5	65	53	46	40	58	48	41	36	38	33	30	29	26	23	20	18	16	13
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	14	11
7	55	43	35	30	49	39	32	27	31	26	22	24	20	18	17	14	13	10
8	51	39	31	26	45	35	29	24	28	23	20	21	18	16	15	13	11	9
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10	8
10	44	32	25	21	39	29	23	19	24	19	16	18	15	13	13	11	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9935	9935	9935
5°	9972	9828	9887
10°	9914	9729	9778
15°	9790	9603	9593
20°	9617	9414	9402
25°	9444	9180	9180
30°	9221	8968	8889
35°	9014	8712	8584
40°	8753	8456	8292
45°	8499	8200	7996
50°	8219	7935	7654
55°	7927	7626	7344
60°	7601	7259	6991
65°	7255	6896	6575
70°	6812	6453	6146
75°	6201	5939	5795
80°	5504	5337	5058
85°	4483	4279	3835



TEST NUMBER: P331517-927

CATALOG NUMBER: S122DIW-S485D1240U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.9	1.1
10°-20°	162.8	3.0
20°-30°	239.3	4.4
30°-40°	278.0	5.1
40°-50°	277.7	5.1
50°-60°	242.1	4.4
60°-70°	179.0	3.3
70°-80°	101.4	1.8
80°-90°	30.6	0.6
90°-100°	44.7	0.8
100°-110°	163.8	3.0
110°-120°	437.9	8.0
120°-130°	722.9	13.2
130°-140°	768.8	14.0
140°-150°	714.5	13.0
150°-160°	574.5	10.5
160°-170°	370.2	6.7
170°-180°	127.4	2.3
0°-30°	459.9	8.4
0°-40°	737.9	13.4
0°-60°	1257.7	22.9
0°-90°	1568.7	28.6
90°-120°	646.4	11.8
90°-150°	2852.5	51.9
90°-180°	3925.0	71.5
0°-180°	5493.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	615	615	615	615	615	
5°	615	613	606	611	610	58
15°	586	582	574	577	574	165
25°	530	525	515	516	515	244
35°	457	451	442	438	436	285
45°	372	368	359	353	350	287
55°	282	278	271	264	261	252
65°	190	186	180	175	172	188
75°	99	98	95	92	93	106
85°	24	24	23	21	21	28
90°	1	12	19	24	26	4
95°	63	33	38	42	42	77
105°	295	307	59	69	74	315
115°	557	574	598	170	80	548
125°	788	801	819	825	828	702
135°	975	990	999	1008	1007	753
145°	1131	1131	1146	1152	1148	707
155°	1245	1238	1248	1253	1246	574
165°	1312	1307	1309	1315	1309	371
175°	1342	1336	1337	1343	1334	128
180°	1339	1339	1339	1339	1339	



TEST NUMBER: P331517-927

CATALOG NUMBER: S122DIW-S485D1240U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	615.3	615.3	615.3	615.3	615.3	615.3	615.3	615.3	615.3	615.3	615.3
2.5°	618.1	617.6	617.1	616.6	616.0	615.2	614.0	612.9	611.7	610.5	611.6
5°	615.3	614.7	614.3	613.7	613.2	612.2	610.8	609.3	607.8	606.4	607.4
7.5°	609.8	609.0	608.2	607.4	606.6	605.5	604.0	602.5	601.0	599.5	600.6
10°	604.7	603.7	602.8	601.9	600.9	599.7	598.1	596.6	595.0	593.4	594.5
12.5°	597.5	596.8	595.9	595.1	594.3	593.1	591.5	589.9	588.4	586.8	587.5
15°	585.7	584.9	584.2	583.4	582.6	581.3	579.6	577.9	576.2	574.5	575.0
17.5°	570.5	569.8	569.0	568.2	567.4	566.2	564.4	562.7	560.9	559.2	559.8
20°	559.7	558.9	558.1	557.3	556.5	555.2	553.3	551.5	549.7	547.9	548.3
22.5°	548.8	547.7	546.6	545.5	544.4	543.0	541.2	539.5	537.7	536.0	536.1
25°	530.1	529.0	528.0	527.0	525.9	524.3	522.0	519.8	517.5	515.3	515.6
27.5°	508.8	507.9	506.9	506.0	505.0	503.7	501.9	500.1	498.4	496.6	496.2
30°	494.6	493.5	492.5	491.5	490.4	488.9	486.9	485.0	483.0	481.0	480.6
32.5°	479.4	478.6	477.8	476.9	476.1	474.6	472.5	470.5	468.4	466.4	465.6
35°	457.3	456.0	454.7	453.4	452.1	450.4	448.3	446.2	444.0	442.0	441.2
37.5°	432.4	431.2	430.1	428.9	427.7	426.1	424.0	421.9	419.8	417.7	416.7
40°	415.3	414.2	413.2	412.2	411.1	409.6	407.4	405.4	403.2	401.2	400.0
42.5°	398.8	397.7	396.6	395.6	394.6	393.0	390.9	388.8	386.7	384.5	383.3
45°	372.2	371.2	370.3	369.4	368.4	367.0	365.0	363.1	361.1	359.1	357.7
47.5°	345.6	344.8	343.9	343.0	342.1	340.7	338.7	336.6	334.5	332.5	331.0
50°	327.2	326.5	325.8	325.2	324.6	323.3	321.5	319.6	317.7	315.9	314.1
52.5°	309.2	308.3	307.4	306.6	305.7	304.4	302.7	301.0	299.2	297.5	296.0
55°	281.6	280.8	280.0	279.2	278.5	277.3	275.7	274.1	272.5	270.9	269.4
57.5°	253.9	253.3	252.6	252.1	251.4	250.3	248.5	246.8	245.0	243.3	241.7
60°	235.4	235.0	234.4	233.9	233.4	232.2	230.4	228.5	226.6	224.8	223.4
62.5°	217.5	216.7	215.8	214.9	214.1	213.0	211.6	210.2	208.7	207.3	206.0
65°	189.9	189.1	188.3	187.5	186.8	185.7	184.4	183.1	181.7	180.5	179.3
67.5°	161.8	161.2	160.6	159.9	159.3	158.4	157.2	156.1	154.9	153.7	152.8
70°	144.3	143.9	143.3	142.8	142.3	141.4	140.2	139.0	137.8	136.7	135.8
72.5°	126.4	125.9	125.3	124.8	124.3	123.7	122.9	122.1	121.4	120.6	119.6
75°	99.4	99.1	98.9	98.6	98.3	97.9	97.2	96.6	95.9	95.2	94.4
77.5°	75.3	74.8	74.4	73.9	73.4	73.1	72.9	72.6	72.3	72.1	71.7
80°	59.2	59.0	58.9	58.8	58.6	58.5	58.1	57.9	57.7	57.4	57.0
82.5°	44.0	44.0	44.0	44.0	43.9	43.8	43.6	43.5	43.3	43.2	42.7
85°	24.2	24.2	24.0	23.8	23.8	23.6	23.4	23.4	23.2	23.1	22.7
87.5°	8.7	9.0	9.3	9.5	9.7	10.0	10.1	10.2	10.4	10.5	10.4
90°	1.0	3.3	5.7	8.1	10.5	12.5	14.2	15.9	17.7	19.4	20.4
92.5°	19.6	19.3	19.2	18.9	18.7	19.0	19.9	20.8	21.6	22.5	23.1
95°	63.0	55.8	48.8	41.7	34.5	31.8	33.3	34.8	36.3	37.8	38.9
97.5°	125.0	105.0	84.9	65.0	44.9	36.6	40.1	43.6	47.1	50.6	51.4
100°	171.5	142.0	112.5	83.0	53.6	40.6	44.3	47.9	51.6	55.2	57.0
102.5°	222.7	216.4	210.2	204.0	197.7	179.3	148.6	118.0	87.4	56.8	59.0
105°	294.6	301.0	307.5	313.9	320.4	294.3	235.5	176.7	117.9	59.1	61.5
107.5°	376.6	381.8	387.0	392.2	397.4	364.8	294.3	223.8	153.3	82.8	80.3
110°	429.3	433.8	438.3	442.8	447.3	418.5	356.3	294.1	231.8	169.6	148.1



TEST NUMBER: P331517-927

CATALOG NUMBER: S122DIW-S485D1240U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	478.9	482.9	486.9	490.9	495.0	489.3	473.9	458.5	443.1	427.7	349.2
115°	557.2	560.9	564.5	568.2	571.9	576.4	581.8	587.2	592.6	597.9	498.2
117.5°	627.2	631.3	635.3	639.4	643.6	647.5	651.1	654.8	658.5	662.3	638.1
120°	678.3	681.6	684.8	688.0	691.3	694.8	698.7	702.6	706.5	710.3	712.9
122.5°	721.8	725.2	728.6	732.0	735.4	739.2	743.4	747.6	751.9	756.1	757.6
125°	787.8	790.6	793.4	796.2	799.0	802.5	806.6	810.6	814.8	818.9	820.4
127.5°	847.7	850.8	853.9	857.1	860.2	863.2	866.3	869.3	872.4	875.4	877.7
130°	885.7	889.1	892.6	896.0	899.5	902.4	904.8	907.1	909.5	911.9	914.3
132.5°	924.5	927.4	930.3	933.3	936.2	938.8	941.2	943.6	945.9	948.3	950.3
135°	974.9	978.3	981.8	985.2	988.6	991.3	993.2	995.2	997.1	999.1	1001.2
137.5°	1025.8	1028.3	1030.6	1033.1	1035.5	1037.8	1040.0	1042.2	1044.3	1046.6	1048.7
140°	1059.1	1060.9	1062.6	1064.3	1066.0	1068.1	1070.5	1072.9	1075.2	1077.6	1079.5
142.5°	1087.1	1088.6	1090.2	1091.7	1093.3	1095.4	1098.1	1100.8	1103.5	1106.3	1108.0
145°	1130.8	1130.7	1130.4	1130.2	1130.0	1131.7	1135.4	1139.1	1142.7	1146.4	1147.9
147.5°	1169.0	1168.2	1167.4	1166.6	1165.8	1167.2	1170.8	1174.4	1178.1	1181.6	1182.8
150°	1193.9	1192.4	1190.9	1189.3	1187.8	1188.8	1192.2	1195.7	1199.1	1202.6	1203.9
152.5°	1214.8	1213.1	1211.4	1209.7	1208.1	1208.9	1212.1	1215.4	1218.7	1221.9	1223.3
155°	1245.2	1243.3	1241.3	1239.4	1237.5	1237.8	1240.4	1242.9	1245.5	1248.2	1249.4
157.5°	1269.1	1267.4	1265.7	1264.2	1262.5	1262.6	1264.4	1266.2	1268.0	1269.9	1271.3
160°	1283.0	1281.8	1280.4	1279.1	1277.9	1277.9	1279.1	1280.4	1281.8	1283.0	1284.3
162.5°	1295.5	1294.1	1292.8	1291.6	1290.2	1290.1	1291.3	1292.4	1293.6	1294.7	1296.1
165°	1312.1	1310.8	1309.5	1308.2	1306.9	1306.6	1307.3	1307.9	1308.5	1309.2	1310.7
167.5°	1324.5	1323.2	1321.9	1320.6	1319.3	1319.0	1319.6	1320.2	1320.8	1321.4	1322.9
170°	1331.5	1330.2	1328.9	1327.6	1326.3	1325.9	1326.3	1326.7	1327.1	1327.6	1329.1
172.5°	1336.1	1334.8	1333.6	1332.2	1330.9	1330.5	1330.9	1331.3	1331.8	1332.2	1333.7
175°	1342.1	1340.6	1339.1	1337.6	1336.1	1335.5	1336.0	1336.4	1336.9	1337.3	1338.8
177.5°	1343.1	1341.9	1340.7	1339.5	1338.2	1337.8	1337.9	1338.1	1338.2	1338.5	1339.7
180°	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2



TEST NUMBER: P331517-927

CATALOG NUMBER: S122DIW-S485D1240U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	615.3	615.3	615.3	615.3	615.3	615.3	615.3	615.3
2.5°	612.7	613.7	614.7	615.2	615.0	614.7	614.6	614.3
5°	608.6	609.6	610.6	611.0	610.8	610.5	610.2	610.0
7.5°	601.7	602.7	603.8	604.1	603.9	603.6	603.2	603.0
10°	595.5	596.6	597.6	597.9	597.5	597.1	596.8	596.4
12.5°	588.3	589.0	589.7	589.9	589.6	589.4	589.1	588.7
15°	575.5	576.1	576.6	576.5	575.8	575.2	574.6	573.9
17.5°	560.4	561.0	561.7	561.6	560.9	560.4	559.8	559.1
20°	548.7	549.1	549.5	549.4	548.8	548.3	547.8	547.2
22.5°	536.1	536.2	536.3	536.2	535.9	535.6	535.3	535.0
25°	515.9	516.1	516.3	516.3	516.1	515.9	515.6	515.3
27.5°	495.8	495.4	495.0	494.6	493.9	493.3	492.7	492.0
30°	480.2	479.8	479.4	479.0	478.4	477.9	477.4	476.8
32.5°	464.9	464.2	463.5	462.9	462.3	461.8	461.3	460.7
35°	440.4	439.6	438.8	438.1	437.4	436.7	436.1	435.5
37.5°	415.7	414.8	413.8	413.0	412.3	411.7	411.1	410.5
40°	398.8	397.6	396.4	395.5	395.0	394.5	394.0	393.4
42.5°	382.0	380.7	379.4	378.4	377.6	376.9	376.2	375.4
45°	356.2	354.8	353.3	352.4	351.8	351.3	350.8	350.2
47.5°	329.5	327.9	326.4	325.3	324.5	323.8	323.0	322.2
50°	312.3	310.4	308.6	307.3	306.7	306.0	305.3	304.7
52.5°	294.5	292.9	291.4	290.2	289.3	288.4	287.6	286.7
55°	267.8	266.3	264.7	263.6	262.8	262.2	261.6	260.9
57.5°	240.2	238.6	237.1	236.1	235.5	235.0	234.6	234.0
60°	221.9	220.5	219.0	218.1	217.7	217.3	216.9	216.5
62.5°	204.6	203.3	201.9	201.1	200.5	200.0	199.6	199.0
65°	178.1	176.9	175.7	174.8	174.1	173.5	172.9	172.1
67.5°	151.9	150.9	150.0	149.3	148.8	148.2	147.7	147.2
70°	134.8	133.9	133.0	132.3	131.7	131.2	130.7	130.2
72.5°	118.7	117.8	116.9	116.2	115.8	115.3	114.9	114.5
75°	93.6	92.9	92.1	91.8	92.1	92.4	92.6	92.9
77.5°	71.3	70.9	70.5	70.1	69.7	69.4	69.0	68.6
80°	56.6	56.2	55.8	55.5	55.2	55.0	54.7	54.4
82.5°	42.2	41.7	41.2	40.9	40.9	40.8	40.7	40.7
85°	22.3	21.9	21.5	21.2	21.1	21.0	20.8	20.7
87.5°	10.3	10.2	10.1	10.1	10.1	10.0	10.0	10.0
90°	21.5	22.6	23.7	24.5	24.9	25.3	25.7	26.1
92.5°	23.6	24.2	24.7	25.1	25.3	25.7	25.9	26.1
95°	39.9	41.0	42.1	42.5	42.3	42.1	41.9	41.7
97.5°	52.3	53.2	54.0	54.6	54.8	55.1	55.4	55.6
100°	58.7	60.4	62.1	63.2	63.6	64.1	64.5	65.0
102.5°	61.2	63.5	65.8	67.2	67.7	68.4	69.0	69.6
105°	63.8	66.2	68.6	70.2	71.1	71.9	72.8	73.7
107.5°	78.0	75.5	73.1	72.3	73.2	74.1	74.9	75.8
110°	126.5	105.0	83.4	73.1	74.0	74.9	75.7	76.5



TEST NUMBER: P331517-927

CATALOG NUMBER: S122DIW-S485D1240U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	270.6	192.1	113.5	74.5	75.3	76.0	76.6	77.3
115°	398.5	298.8	199.1	141.5	126.0	110.5	95.0	79.5
117.5°	614.0	589.9	565.8	528.2	477.3	426.4	375.4	324.4
120°	715.5	718.0	720.6	707.4	678.3	649.3	620.2	591.1
122.5°	759.1	760.7	762.2	760.2	754.6	748.9	743.3	737.6
125°	821.9	823.4	824.9	825.9	826.6	827.3	827.9	828.5
127.5°	879.8	882.0	884.2	885.4	885.5	885.7	885.7	885.9
130°	916.6	919.0	921.3	922.4	922.2	922.0	921.8	921.5
132.5°	952.4	954.3	956.4	957.3	957.1	956.9	956.6	956.5
135°	1003.4	1005.5	1007.7	1008.5	1008.1	1007.7	1007.3	1006.9
137.5°	1050.8	1052.9	1055.0	1055.7	1054.9	1054.2	1053.5	1052.7
140°	1081.5	1083.4	1085.4	1085.8	1084.7	1083.6	1082.5	1081.5
142.5°	1109.8	1111.6	1113.3	1113.6	1112.6	1111.5	1110.4	1109.4
145°	1149.4	1150.9	1152.4	1152.6	1151.5	1150.5	1149.4	1148.3
147.5°	1183.9	1185.0	1186.1	1186.2	1185.3	1184.4	1183.5	1182.6
150°	1205.1	1206.5	1207.8	1207.8	1206.8	1205.7	1204.6	1203.6
152.5°	1224.6	1225.8	1227.2	1227.1	1225.7	1224.2	1222.8	1221.4
155°	1250.7	1252.0	1253.3	1253.1	1251.3	1249.7	1247.9	1246.2
157.5°	1272.8	1274.2	1275.7	1275.6	1273.9	1272.2	1270.6	1268.8
160°	1285.6	1286.9	1288.2	1288.1	1286.6	1285.1	1283.6	1282.1
162.5°	1297.6	1299.0	1300.5	1300.3	1298.5	1296.6	1294.7	1292.9
165°	1312.2	1313.7	1315.2	1315.2	1313.7	1312.2	1310.7	1309.2
167.5°	1324.4	1325.9	1327.4	1327.2	1325.2	1323.3	1321.4	1319.5
170°	1330.6	1332.1	1333.6	1333.4	1331.5	1329.5	1327.6	1325.6
172.5°	1335.2	1336.7	1338.2	1338.1	1336.1	1334.2	1332.2	1330.3
175°	1340.3	1341.8	1343.3	1343.0	1340.8	1338.7	1336.5	1334.4
177.5°	1340.8	1342.0	1343.3	1343.1	1341.6	1340.0	1338.5	1336.9
180°	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2

(END OF REPORT)