

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331502-927

Luminaire Tested: **S122DIW-S485D710U927-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331502-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIW-S485D710U927-4F0-1E-UDD-A1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 485 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 710 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3648.9 lumens  
Efficiency: N/A  
Efficacy: 97.0 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 37.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

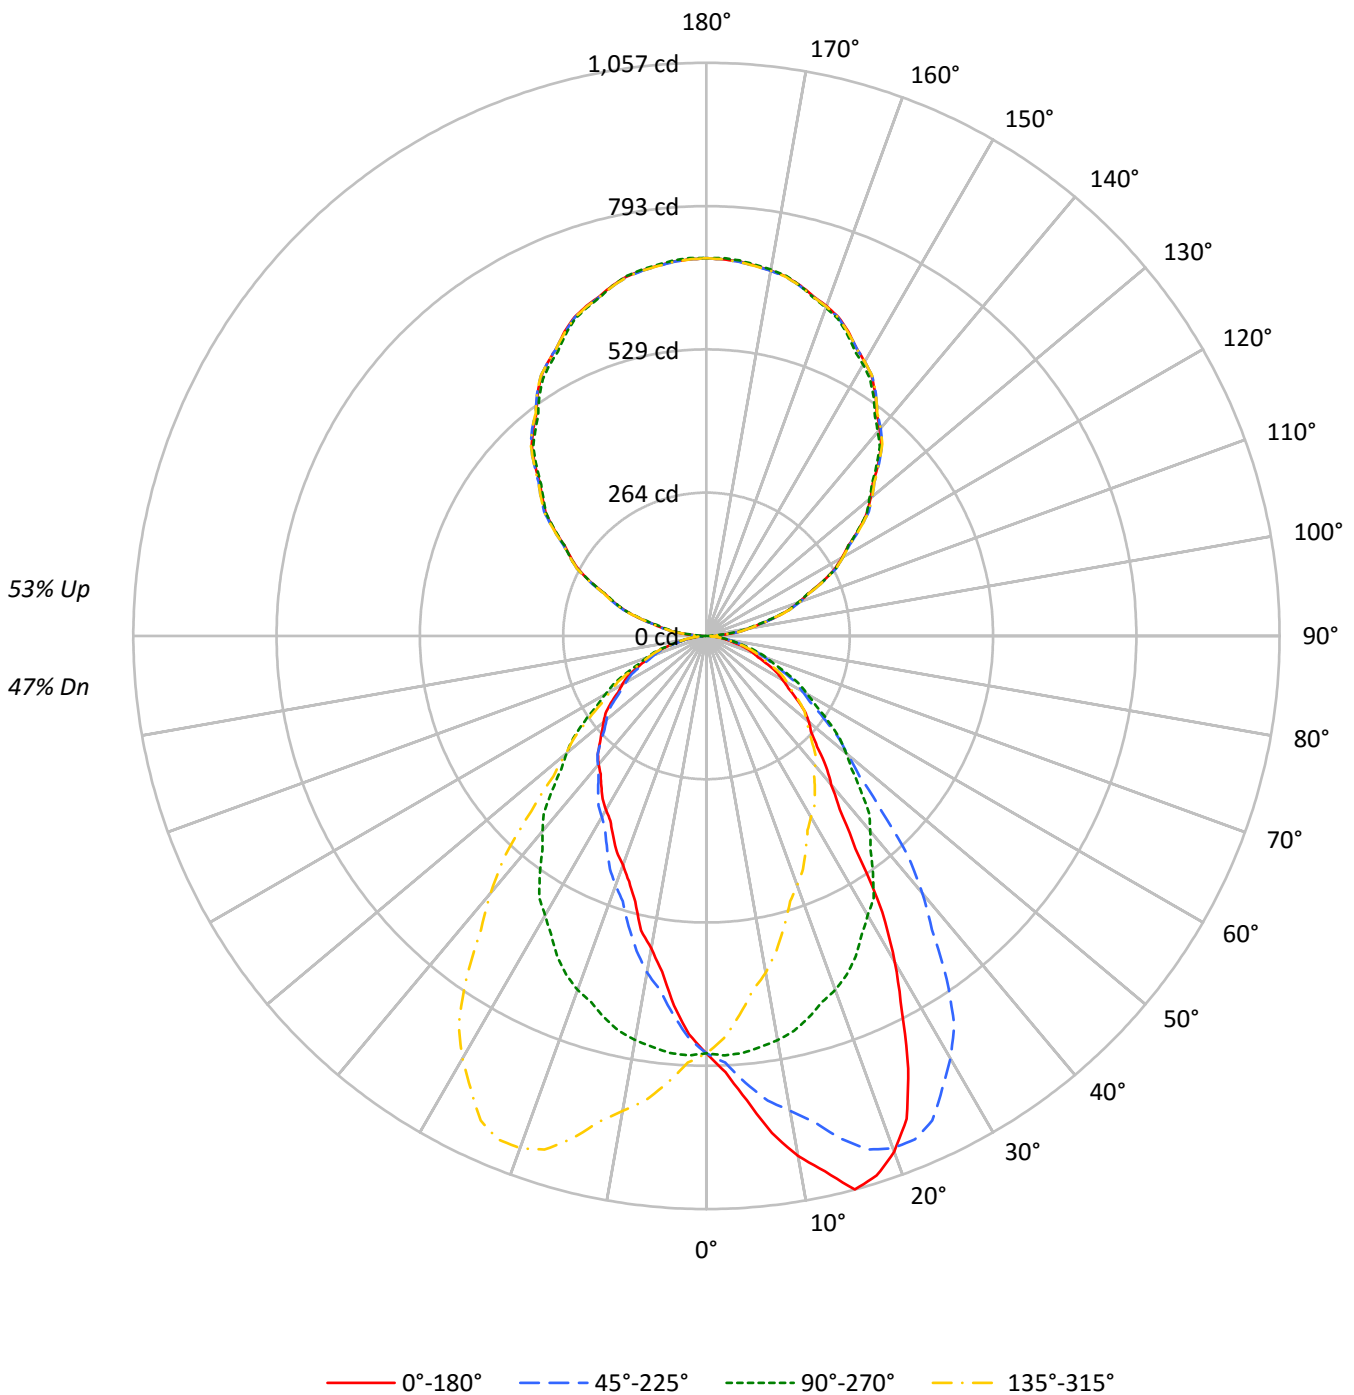



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	81	81	81	67	67	67	53	53	53	47
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	48	47	46	40
2	89	82	76	71	82	76	71	66	64	60	57	53	50	48	42	41	39	34
3	82	72	65	60	75	67	61	56	57	52	48	47	44	41	38	36	34	30
4	75	64	57	51	69	60	53	48	50	45	41	42	38	35	34	32	29	26
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26	23
6	64	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23	20
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21	18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16
9	51	39	32	27	47	36	30	25	31	26	23	27	23	20	22	19	17	15
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	21	18	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	12429	12429	12429	12429
5°	13935	12511	11086	12511
10°	15967	12408	9594	12408
15°	17665	12179	8476	12179
20°	17395	11936	7727	11936
25°	15684	11610	7252	11610
30°	12961	11091	6906	11091
35°	9447	10549	6660	10549
40°	7546	9908	6521	9908
45°	6594	9168	6336	9168
50°	6199	8450	6212	8450
55°	5714	7721	6046	7721
60°	5238	6946	5790	6946
65°	4768	6250	5540	6250
70°	4329	5570	5169	5570
75°	3843	4816	4579	4816
80°	3301	3989	3682	3989
85°	2964	2964	2186	2964



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	73.3	2.0
10°-20°	213.1	5.8
20°-30°	309.3	8.5
30°-40°	326.4	8.9
40°-50°	289.0	7.9
50°-60°	230.6	6.3
60°-70°	156.8	4.3
70°-80°	80.4	2.2
80°-90°	22.2	0.6
90°-100°	44.1	1.2
100°-110°	137.1	3.8
110°-120°	234.3	6.4
120°-130°	308.1	8.4
130°-140°	345.9	9.5
140°-150°	339.1	9.3
150°-160°	284.5	7.8
160°-170°	188.7	5.2
170°-180°	65.9	1.8
0°-30°	595.8	16.3
0°-40°	922.2	25.3
0°-60°	1441.8	39.5
0°-90°	1701.1	46.6
90°-120°	415.5	11.4
90°-150°	1408.7	38.6
90°-180°	1948.0	53.4
0°-180°	3648.9	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	770	770	770	770	770	
5°	860	772	684	772	860	86
15°	1057	729	507	729	1057	292
25°	880	652	407	652	880	398
35°	479	535	338	535	479	312
45°	289	402	278	402	289	227
55°	203	274	215	274	203	182
65°	125	164	145	164	125	124
75°	62	77	73	77	62	66
85°	16	16	12	16	16	18
90°	20	1	20	1	20	9
95°	36	31	36	31	36	41
105°	130	126	130	126	130	137
115°	235	235	235	235	235	232
125°	343	342	343	342	343	306
135°	448	443	448	443	448	345
145°	543	537	543	537	543	339
155°	619	614	619	614	619	285
165°	669	668	669	668	669	189
175°	693	695	693	695	693	66
180°	697	697	697	697	697	



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8
2.5°	805.3	805.6	806.0	802.2	801.8	801.8	798.4	795.6	792.3	787.7	788.2
5°	859.8	863.0	864.2	860.6	855.3	854.7	849.7	841.4	833.7	827.5	823.1
7.5°	924.7	926.0	923.1	918.5	914.5	907.4	898.0	888.8	876.0	864.2	855.5
10°	973.9	975.7	970.7	963.8	958.2	950.0	936.4	922.4	905.6	889.3	876.3
12.5°	1011.3	1015.7	1009.2	1008.4	998.7	987.4	971.1	964.1	940.4	917.7	903.7
15°	1056.8	1056.5	1057.1	1051.5	1044.3	1042.6	1025.4	1006.8	973.4	960.0	936.9
17.5°	1043.6	1048.1	1050.2	1050.1	1050.0	1048.8	1043.3	1031.6	1014.8	993.2	966.6
20°	1012.4	1018.3	1019.2	1026.0	1029.8	1034.9	1037.0	1033.7	1023.3	1005.3	982.2
22.5°	964.1	965.7	968.5	979.1	987.5	1000.1	1006.6	1017.6	1013.6	1004.8	985.6
25°	880.4	877.5	887.8	893.2	912.4	932.5	947.0	963.0	977.2	985.8	980.2
27.5°	780.0	775.5	791.1	805.2	820.8	842.6	865.1	891.8	914.0	941.8	951.3
30°	695.2	697.9	712.7	727.8	751.5	782.2	807.6	836.9	868.6	899.7	921.2
32.5°	603.9	614.1	623.4	646.6	667.4	701.7	739.0	775.6	815.2	850.4	883.8
35°	479.3	491.1	504.1	521.0	550.2	584.3	620.7	670.1	724.0	772.1	811.8
37.5°	403.4	401.6	409.0	421.2	444.9	472.4	514.2	563.1	626.5	683.1	739.0
40°	358.0	356.8	362.1	373.4	391.4	411.5	448.2	491.1	550.0	619.2	685.8
42.5°	326.7	327.4	330.4	338.3	350.7	367.3	394.7	431.3	485.1	550.3	621.9
45°	288.8	290.8	294.1	297.9	305.0	318.6	334.0	360.0	402.7	457.1	527.5
47.5°	261.4	261.5	264.7	268.2	272.4	280.0	292.6	309.0	339.0	383.3	443.9
50°	246.8	244.6	247.0	249.7	254.1	259.4	267.8	283.1	303.2	339.1	389.6
52.5°	228.8	228.8	230.9	232.0	235.9	241.2	248.8	259.4	277.7	305.7	347.3
55°	203.0	204.5	205.7	207.4	211.0	214.8	220.7	227.8	242.0	263.0	293.7
57.5°	178.7	179.2	180.4	183.7	186.0	189.5	195.1	201.6	210.8	226.4	249.5
60°	162.2	162.2	164.5	166.0	168.9	172.5	176.9	183.2	191.4	204.1	222.8
62.5°	146.9	146.7	147.7	150.1	152.3	155.7	160.1	165.4	173.2	184.5	199.8
65°	124.8	124.3	126.0	126.6	129.0	132.2	135.8	141.4	147.7	155.9	169.5
67.5°	103.5	104.3	105.2	106.3	107.7	111.1	113.4	117.4	122.6	129.5	138.8
70°	91.7	91.7	91.7	92.6	94.3	96.2	98.5	101.8	106.8	112.7	121.0
72.5°	78.4	79.4	80.3	79.9	82.1	83.1	86.0	87.8	92.6	96.4	103.7
75°	61.6	61.6	61.6	63.0	63.9	64.8	66.5	68.4	70.7	75.4	79.3
77.5°	45.9	45.8	46.1	46.4	47.4	48.5	49.0	50.6	52.8	55.0	58.2
80°	35.5	36.1	36.4	37.0	37.0	37.5	37.9	39.9	41.4	42.9	45.0
82.5°	27.5	27.6	27.6	27.7	28.0	28.4	29.1	29.8	30.3	31.5	33.1
85°	16.0	15.7	15.7	16.2	16.0	16.0	16.6	17.2	17.2	17.4	18.4
87.5°	10.1	10.1	10.3	10.1	10.1	10.3	10.4	10.1	10.5	10.8	10.4
90°	20.0	19.9	19.7	19.6	19.5	19.6	19.8	20.0	20.3	20.6	17.7
92.5°	19.0	19.0	19.0	18.9	18.9	18.9	18.9	18.8	18.8	18.7	18.0
95°	36.4	36.7	37.0	37.2	37.5	37.6	37.6	37.6	37.6	37.6	37.4
97.5°	63.1	63.1	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	62.7
100°	80.6	80.6	80.8	81.0	81.0	81.1	81.1	81.1	81.1	81.1	80.7
102.5°	100.3	100.4	100.5	100.7	100.8	100.8	100.7	100.6	100.5	100.4	99.9
105°	130.5	130.5	130.5	130.5	130.5	130.4	130.1	129.8	129.6	129.4	129.0
107.5°	159.0	159.5	160.2	160.7	161.4	161.6	161.5	161.4	161.3	161.2	161.2
110°	181.1	181.4	181.8	182.2	182.6	182.8	182.8	182.8	182.8	182.8	182.8



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	202.2	202.5	202.8	203.1	203.4	203.7	204.0	204.3	204.6	204.9	205.0
115°	235.1	235.5	235.9	236.3	236.7	236.9	237.1	237.3	237.3	237.5	237.7
117.5°	266.5	266.9	267.3	267.7	268.1	268.5	268.8	269.1	269.4	269.7	270.5
120°	288.6	289.0	289.4	289.8	290.2	290.4	290.4	290.4	290.4	290.4	291.4
122.5°	310.3	310.5	310.9	311.1	311.4	311.7	312.0	312.4	312.7	313.0	313.7
125°	343.3	343.4	343.6	343.7	343.8	344.0	344.4	344.8	345.2	345.6	346.0
127.5°	373.4	373.8	374.2	374.6	375.1	375.5	376.0	376.4	376.9	377.4	377.9
130°	395.1	395.5	396.1	396.6	397.1	397.5	397.8	398.1	398.3	398.5	398.8
132.5°	415.7	416.1	416.5	417.0	417.4	417.9	418.4	419.1	419.6	420.2	420.2
135°	447.9	448.3	448.7	449.1	449.5	449.8	449.9	450.0	450.1	450.3	450.0
137.5°	477.1	477.6	478.2	478.6	479.2	479.5	479.6	479.7	479.8	479.9	479.6
140°	497.3	497.8	498.4	498.9	499.4	499.6	499.6	499.6	499.6	499.6	499.0
142.5°	515.6	516.2	516.7	517.2	517.8	517.9	517.8	517.8	517.6	517.5	517.1
145°	543.2	543.7	544.2	544.7	545.3	545.4	545.3	545.2	545.0	544.9	544.2
147.5°	567.8	568.2	568.7	569.3	569.7	569.8	569.5	569.3	568.9	568.7	568.2
150°	583.8	584.2	584.5	584.9	585.3	585.3	584.9	584.5	584.2	583.8	583.2
152.5°	598.8	599.3	599.8	600.2	600.8	600.8	600.2	599.8	599.3	598.8	598.2
155°	619.0	619.4	619.8	620.2	620.6	620.4	619.8	619.1	618.5	617.8	617.4
157.5°	636.4	637.0	637.6	638.3	638.9	638.7	637.9	637.0	636.1	635.3	635.0
160°	647.2	647.8	648.2	648.8	649.3	649.2	648.4	647.6	646.8	646.0	645.9
162.5°	656.6	657.3	657.9	658.5	659.1	659.0	658.1	657.2	656.3	655.5	655.3
165°	669.0	669.6	670.3	670.9	671.6	671.5	670.5	669.6	668.7	667.8	667.8
167.5°	679.1	679.8	680.4	681.1	681.8	681.7	680.7	679.9	678.9	678.0	678.0
170°	684.2	685.0	685.8	686.6	687.4	687.3	686.4	685.5	684.6	683.7	683.8
172.5°	688.5	689.3	690.1	690.9	691.6	691.6	690.6	689.8	688.8	687.9	688.0
175°	693.1	693.9	694.7	695.4	696.2	696.2	695.2	694.3	693.4	692.4	692.8
177.5°	695.1	695.8	696.4	697.0	697.7	697.7	697.0	696.4	695.8	695.1	695.4
180°	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8
2.5°	789.9	788.0	786.8	782.6	778.8	775.0	773.8	774.3	769.1	764.1	762.0
5°	820.7	814.8	809.1	801.1	791.7	781.3	776.0	771.9	761.5	750.3	743.8
7.5°	848.3	839.8	828.9	814.0	800.2	783.9	773.5	764.4	749.2	733.3	723.7
10°	865.1	853.5	839.6	821.3	804.4	784.6	770.7	756.8	739.0	720.1	708.3
12.5°	879.5	864.0	850.2	826.7	806.8	782.0	765.5	745.9	727.2	704.7	693.1
15°	913.9	885.2	859.1	832.5	807.9	773.3	755.0	728.6	704.1	676.3	663.0
17.5°	940.4	908.2	867.2	833.4	804.7	766.4	739.4	707.9	678.8	647.1	629.0
20°	955.6	918.6	874.5	834.3	799.9	756.2	726.9	694.7	660.6	624.8	605.3
22.5°	964.6	925.7	882.1	830.8	790.5	747.9	711.1	675.7	641.2	602.6	582.1
25°	967.4	931.9	885.7	827.8	778.6	730.5	686.0	651.7	610.1	573.9	544.1
27.5°	953.3	927.9	883.5	822.2	765.0	708.6	659.2	620.3	576.2	537.1	507.0
30°	936.0	921.2	878.1	816.5	754.1	693.5	639.1	594.9	551.2	511.5	480.8
32.5°	909.3	906.1	868.2	808.5	742.5	674.3	618.0	573.4	524.9	485.9	456.6
35°	856.7	871.0	847.0	790.5	720.6	647.1	586.1	535.2	484.9	447.6	420.1
37.5°	786.4	821.7	815.4	764.1	691.2	617.3	550.0	496.9	448.9	411.3	384.3
40°	737.8	782.8	789.3	744.0	670.4	594.4	523.1	470.1	423.3	389.0	361.8
42.5°	685.8	738.3	756.2	719.9	647.7	570.2	498.9	444.1	397.8	364.4	340.3
45°	598.5	668.0	700.3	679.5	609.7	530.4	457.1	401.5	359.5	328.1	309.4
47.5°	516.9	592.9	636.3	628.9	567.5	489.0	416.5	363.1	322.3	297.2	280.5
50°	459.1	537.3	589.6	592.0	537.3	459.5	386.7	336.4	298.8	275.4	261.8
52.5°	409.0	483.5	540.7	553.2	503.4	428.6	359.9	309.9	276.8	255.3	243.1
55°	343.5	406.5	469.8	492.9	453.0	381.9	318.3	274.3	243.2	228.4	217.8
57.5°	285.6	338.1	396.6	422.1	397.4	336.7	277.0	238.8	213.6	200.6	192.4
60°	255.0	296.4	348.5	379.0	357.7	303.6	251.4	215.1	194.4	182.8	175.2
62.5°	226.6	263.3	307.3	335.2	323.6	272.5	225.9	193.8	175.9	165.1	159.5
65°	187.0	215.9	250.0	275.8	268.1	229.3	191.2	163.6	149.4	140.9	136.4
67.5°	153.9	174.9	198.5	221.0	214.8	187.4	156.8	135.3	124.7	117.3	114.7
70°	133.2	149.1	170.1	188.1	183.2	160.7	136.4	118.0	108.8	102.7	100.0
72.5°	113.3	126.4	142.4	157.2	153.8	135.1	114.9	101.0	94.0	88.2	86.0
75°	85.5	95.5	105.4	115.1	114.2	99.7	87.9	77.2	71.6	67.2	66.3
77.5°	63.1	68.8	75.4	81.2	79.6	71.3	62.0	55.9	51.8	48.8	48.3
80°	48.2	51.5	56.2	60.4	58.3	54.7	47.4	42.9	39.9	37.0	35.8
82.5°	34.9	38.3	41.0	43.3	41.7	38.4	33.8	30.8	29.1	27.0	26.5
85°	18.4	20.1	21.3	21.9	21.3	19.3	17.2	16.0	14.5	13.6	13.3
87.5°	10.1	9.5	9.0	9.0	7.9	7.6	6.3	5.3	5.4	5.5	5.3
90°	14.8	12.0	9.1	6.9	5.3	3.7	2.1	0.6	2.1	3.7	5.3
92.5°	17.3	16.6	16.0	15.1	13.9	12.8	11.6	10.5	11.6	12.8	13.9
95°	37.1	36.8	36.6	35.8	34.5	33.2	31.8	30.6	31.8	33.2	34.5
97.5°	62.3	61.8	61.2	60.4	59.3	58.1	57.0	55.8	57.0	58.1	59.3
100°	80.3	79.9	79.5	78.8	77.8	76.8	75.7	74.6	75.7	76.8	77.8
102.5°	99.4	98.9	98.4	97.8	96.9	96.1	95.2	94.4	95.2	96.1	96.9
105°	128.8	128.6	128.3	127.9	127.5	127.1	126.7	126.4	126.7	127.1	127.5
107.5°	161.2	161.2	161.2	160.9	160.3	159.8	159.1	158.6	159.1	159.8	160.3
110°	182.8	182.8	182.8	182.4	181.6	180.9	180.1	179.3	180.1	180.9	181.6





TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	205.1	205.3	205.3	205.0	204.2	203.4	202.6	201.8	202.6	203.4	204.2
115°	238.0	238.3	238.5	238.3	237.5	236.7	235.9	235.1	235.9	236.7	237.5
117.5°	271.2	271.9	272.6	272.4	271.4	270.4	269.3	268.3	269.3	270.4	271.4
120°	292.5	293.5	294.5	294.5	293.5	292.5	291.4	290.4	291.4	292.5	293.5
122.5°	314.4	315.1	315.9	315.6	314.3	313.1	311.9	310.6	311.9	313.1	314.3
125°	346.4	346.8	347.2	346.8	345.6	344.4	343.3	342.1	343.3	344.4	345.6
127.5°	378.3	378.8	379.3	378.7	377.2	375.8	374.3	372.8	374.3	375.8	377.2
130°	399.1	399.3	399.6	398.9	397.2	395.5	393.8	392.1	393.8	395.5	397.2
132.5°	420.1	420.0	420.0	419.2	417.9	416.5	415.1	413.8	415.1	416.5	417.9
135°	449.8	449.5	449.2	448.4	446.9	445.5	444.1	442.7	444.1	445.5	446.9
137.5°	479.3	478.9	478.6	477.8	476.7	475.5	474.3	473.1	474.3	475.5	476.7
140°	498.4	497.7	497.0	496.1	495.0	493.8	492.6	491.5	492.6	493.8	495.0
142.5°	516.7	516.2	515.8	514.9	513.8	512.6	511.4	510.2	511.4	512.6	513.8
145°	543.4	542.6	541.8	541.0	540.0	539.1	538.2	537.3	538.2	539.1	540.0
147.5°	567.6	567.1	566.6	565.8	564.7	563.6	562.4	561.4	562.4	563.6	564.7
150°	582.7	582.2	581.6	581.0	580.2	579.4	578.6	577.8	578.6	579.4	580.2
152.5°	597.5	596.9	596.3	595.6	594.8	594.0	593.2	592.4	593.2	594.0	594.8
155°	617.0	616.6	616.2	615.8	615.4	615.1	614.7	614.3	614.7	615.1	615.4
157.5°	634.8	634.5	634.3	634.1	633.7	633.5	633.3	633.0	633.3	633.5	633.7
160°	645.8	645.6	645.5	645.3	645.1	644.8	644.5	644.3	644.5	644.8	645.1
162.5°	655.2	655.1	654.9	654.8	654.7	654.7	654.7	654.6	654.7	654.7	654.7
165°	667.8	667.8	667.8	667.9	668.0	668.1	668.2	668.4	668.2	668.1	668.0
167.5°	678.0	678.1	678.1	678.3	678.7	679.1	679.5	679.9	679.5	679.1	678.7
170°	683.9	684.0	684.2	684.4	684.8	685.2	685.6	686.0	685.6	685.2	684.8
172.5°	688.2	688.2	688.4	688.6	689.0	689.4	689.8	690.2	689.8	689.4	689.0
175°	693.0	693.2	693.6	693.9	694.3	694.7	695.1	695.4	695.1	694.7	694.3
177.5°	695.6	695.8	696.0	696.2	696.6	696.9	697.2	697.5	697.2	696.9	696.6
180°	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8
2.5°	759.6	758.2	753.2	750.6	746.4	742.4	739.7	740.9	741.9	741.4	740.7
5°	737.8	732.2	723.7	716.2	710.9	701.2	697.0	695.0	693.2	691.1	689.0
7.5°	711.9	703.1	690.8	680.2	670.3	658.1	651.3	647.1	642.8	638.1	634.0
10°	693.5	681.0	668.0	653.2	641.4	630.4	620.7	614.2	608.2	602.6	598.5
12.5°	674.1	659.7	643.6	623.4	610.4	594.7	593.3	581.8	572.5	569.0	564.2
15°	643.2	623.1	602.6	578.7	568.3	554.1	545.3	536.4	528.4	522.8	521.3
17.5°	608.1	582.0	561.7	544.5	527.6	513.0	504.9	497.7	491.2	483.6	482.7
20°	581.3	558.9	536.7	521.6	504.1	489.3	479.3	472.1	466.5	462.1	458.3
22.5°	556.0	531.4	511.1	494.6	477.4	465.4	457.5	450.7	446.0	441.1	437.4
25°	515.4	496.1	474.0	455.3	441.1	433.4	426.9	421.0	418.0	414.8	410.7
27.5°	479.8	458.4	437.7	423.3	410.7	403.9	399.3	395.3	392.5	390.6	388.2
30°	454.7	433.1	416.8	402.7	392.3	385.5	382.5	380.2	376.9	375.7	374.5
32.5°	430.6	411.1	397.2	384.9	375.0	370.6	367.9	365.8	363.2	362.0	359.7
35°	396.4	380.2	366.5	359.7	351.7	347.9	345.9	342.9	340.6	339.4	339.1
37.5°	364.3	350.1	341.2	332.5	329.1	326.7	323.9	321.9	321.2	321.0	320.7
40°	343.5	331.9	323.9	316.9	315.4	311.8	309.4	307.7	307.7	308.0	307.7
42.5°	324.6	314.2	307.1	301.0	299.3	297.1	294.8	294.7	295.2	296.1	295.2
45°	295.9	288.4	283.4	280.4	277.2	275.1	274.8	275.8	276.0	276.3	277.2
47.5°	269.4	264.5	260.0	256.7	255.3	254.9	254.6	256.1	257.5	258.1	259.4
50°	253.8	248.2	244.4	242.3	241.1	240.5	241.1	242.9	244.1	245.6	246.4
52.5°	236.3	232.3	229.7	228.1	227.6	228.0	228.1	230.1	232.0	232.5	233.0
55°	212.1	209.1	208.6	205.9	207.1	206.8	208.3	209.5	211.2	213.0	213.3
57.5°	188.0	185.6	184.0	184.3	184.6	185.9	187.1	189.3	191.2	193.0	193.2
60°	171.9	170.7	169.8	169.8	170.4	172.2	173.6	175.7	176.9	178.1	179.0
62.5°	157.2	156.1	155.1	155.6	157.2	158.2	159.9	161.1	162.2	163.4	163.8
65°	134.0	133.4	134.4	134.9	135.2	136.7	138.8	139.7	140.9	141.4	143.5
67.5°	112.6	112.8	112.6	113.5	115.2	115.6	117.5	119.6	119.9	121.0	122.3
70°	98.2	98.8	99.4	100.0	101.5	102.0	103.5	104.4	105.6	106.5	107.4
72.5°	85.0	85.1	85.7	85.6	86.8	88.1	89.4	90.2	91.4	92.5	93.4
75°	65.4	65.4	66.0	66.3	67.7	69.2	68.9	69.6	70.7	71.9	72.5
77.5°	47.8	47.1	47.8	48.0	48.5	49.7	50.0	50.9	52.2	51.8	52.4
80°	36.4	35.5	36.4	36.7	36.7	38.2	38.2	38.7	39.6	38.7	39.6
82.5°	26.0	25.6	26.2	26.3	26.8	26.8	27.3	27.4	28.3	27.9	28.3
85°	13.0	12.8	13.0	12.8	13.0	13.3	13.3	13.0	13.0	13.6	12.8
87.5°	5.4	5.6	5.9	6.5	6.9	7.2	6.9	6.8	6.8	6.3	6.3
90°	6.9	9.1	12.0	14.8	17.7	20.6	20.3	20.0	19.8	19.6	19.5
92.5°	15.1	16.0	16.6	17.3	18.0	18.7	18.8	18.8	18.9	18.9	18.9
95°	35.8	36.6	36.8	37.1	37.4	37.6	37.6	37.6	37.6	37.6	37.5
97.5°	60.4	61.2	61.8	62.3	62.7	63.2	63.2	63.2	63.2	63.2	63.2
100°	78.8	79.5	79.9	80.3	80.7	81.1	81.1	81.1	81.1	81.1	81.0
102.5°	97.8	98.4	98.9	99.4	99.9	100.4	100.5	100.6	100.7	100.8	100.8
105°	127.9	128.3	128.6	128.8	129.0	129.4	129.6	129.8	130.1	130.4	130.5
107.5°	160.9	161.2	161.2	161.2	161.2	161.2	161.3	161.4	161.5	161.6	161.4
110°	182.4	182.8	182.8	182.8	182.8	182.8	182.8	182.8	182.8	182.8	182.6



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	205.0	205.3	205.3	205.1	205.0	204.9	204.6	204.3	204.0	203.7	203.4
115°	238.3	238.5	238.3	238.0	237.7	237.5	237.3	237.3	237.1	236.9	236.7
117.5°	272.4	272.6	271.9	271.2	270.5	269.7	269.4	269.1	268.8	268.5	268.1
120°	294.5	294.5	293.5	292.5	291.4	290.4	290.4	290.4	290.4	290.4	290.2
122.5°	315.6	315.9	315.1	314.4	313.7	313.0	312.7	312.4	312.0	311.7	311.4
125°	346.8	347.2	346.8	346.4	346.0	345.6	345.2	344.8	344.4	344.0	343.8
127.5°	378.7	379.3	378.8	378.3	377.9	377.4	376.9	376.4	376.0	375.5	375.1
130°	398.9	399.6	399.3	399.1	398.8	398.5	398.3	398.1	397.8	397.5	397.1
132.5°	419.2	420.0	420.0	420.1	420.2	420.2	419.6	419.1	418.4	417.9	417.4
135°	448.4	449.2	449.5	449.8	450.0	450.3	450.1	450.0	449.9	449.8	449.5
137.5°	477.8	478.6	478.9	479.3	479.6	479.9	479.8	479.7	479.6	479.5	479.2
140°	496.1	497.0	497.7	498.4	499.0	499.6	499.6	499.6	499.6	499.6	499.4
142.5°	514.9	515.8	516.2	516.7	517.1	517.5	517.6	517.8	517.8	517.9	517.8
145°	541.0	541.8	542.6	543.4	544.2	544.9	545.0	545.2	545.3	545.4	545.3
147.5°	565.8	566.6	567.1	567.6	568.2	568.7	568.9	569.3	569.5	569.8	569.7
150°	581.0	581.6	582.2	582.7	583.2	583.8	584.2	584.5	584.9	585.3	585.3
152.5°	595.6	596.3	596.9	597.5	598.2	598.8	599.3	599.8	600.2	600.8	600.8
155°	615.8	616.2	616.6	617.0	617.4	617.8	618.5	619.1	619.8	620.4	620.6
157.5°	634.1	634.3	634.5	634.8	635.0	635.3	636.1	637.0	637.9	638.7	638.9
160°	645.3	645.5	645.6	645.8	645.9	646.0	646.8	647.6	648.4	649.2	649.3
162.5°	654.8	654.9	655.1	655.2	655.3	655.5	656.3	657.2	658.1	659.0	659.1
165°	667.9	667.8	667.8	667.8	667.8	667.8	668.7	669.6	670.5	671.5	671.6
167.5°	678.3	678.1	678.1	678.0	678.0	678.0	678.9	679.9	680.7	681.7	681.8
170°	684.4	684.2	684.0	683.9	683.8	683.7	684.6	685.5	686.4	687.3	687.4
172.5°	688.6	688.4	688.2	688.2	688.0	687.9	688.8	689.8	690.6	691.6	691.6
175°	693.9	693.6	693.2	693.0	692.8	692.4	693.4	694.3	695.2	696.2	696.2
177.5°	696.2	696.0	695.8	695.6	695.4	695.1	695.8	696.4	697.0	697.7	697.7
180°	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8
2.5°	738.3	737.8	737.8	735.7	737.8	737.8	738.3	740.7	741.4	741.9	740.9
5°	684.9	684.0	682.5	684.0	682.5	684.0	684.9	689.0	691.1	693.2	695.0
7.5°	632.1	628.5	628.0	624.5	628.0	628.5	632.1	634.0	638.1	642.8	647.1
10°	593.5	591.1	590.8	585.2	590.8	591.1	593.5	598.5	602.6	608.2	614.2
12.5°	564.1	558.4	559.6	556.3	559.6	558.4	564.1	564.2	569.0	572.5	581.8
15°	513.3	513.3	512.1	507.1	512.1	513.3	513.3	521.3	522.8	528.4	536.4
17.5°	476.8	476.2	473.3	474.8	473.3	476.2	476.8	482.7	483.6	491.2	497.7
20°	455.0	453.2	449.7	449.7	449.7	453.2	455.0	458.3	462.1	466.5	472.1
22.5°	434.4	434.3	430.6	431.7	430.6	434.3	434.4	437.4	441.1	446.0	450.7
25°	410.4	408.0	406.2	407.1	406.2	408.0	410.4	410.7	414.8	418.0	421.0
27.5°	387.5	386.2	386.1	383.7	386.1	386.2	387.5	388.2	390.6	392.5	395.3
30°	374.2	371.3	371.9	370.4	371.9	371.3	374.2	374.5	375.7	376.9	380.2
32.5°	359.1	358.1	357.4	356.2	357.4	358.1	359.1	359.7	362.0	363.2	365.8
35°	338.4	338.7	337.2	337.9	337.2	338.7	338.4	339.1	339.4	340.6	342.9
37.5°	320.4	321.4	320.7	320.8	320.7	321.4	320.4	320.7	321.0	321.2	321.9
40°	308.6	308.6	308.6	309.4	308.6	308.6	308.6	307.7	308.0	307.7	307.7
42.5°	297.2	296.8	296.3	296.2	296.3	296.8	297.2	295.2	296.1	295.2	294.7
45°	277.8	278.7	279.0	277.5	279.0	278.7	277.8	277.2	276.3	276.0	275.8
47.5°	260.2	260.3	260.2	261.5	260.2	260.3	260.2	259.4	258.1	257.5	256.1
50°	248.0	247.3	248.0	247.3	248.0	247.3	248.0	246.4	245.6	244.1	242.9
52.5°	234.9	235.0	234.6	234.6	234.6	235.0	234.9	233.0	232.5	232.0	230.1
55°	214.5	215.1	214.8	214.8	214.8	215.1	214.5	213.3	213.0	211.2	209.5
57.5°	193.4	193.9	194.3	193.0	194.3	193.9	193.4	193.2	193.0	191.2	189.3
60°	178.7	180.1	179.9	179.3	179.9	180.1	178.7	179.0	178.1	176.9	175.7
62.5°	165.2	165.7	165.6	165.6	165.6	165.7	165.2	163.8	163.4	162.2	161.1
65°	144.3	145.0	144.1	145.0	144.1	145.0	144.3	143.5	141.4	140.9	139.7
67.5°	121.9	122.2	122.8	123.2	122.8	122.2	121.9	122.3	121.0	119.9	119.6
70°	108.0	107.7	108.6	109.5	108.6	107.7	108.0	107.4	106.5	105.6	104.4
72.5°	93.3	94.0	93.6	94.3	93.6	94.0	93.3	93.4	92.5	91.4	90.2
75°	71.9	72.8	72.5	73.4	72.5	72.8	71.9	72.5	71.9	70.7	69.6
77.5°	52.0	52.0	52.0	52.4	52.0	52.0	52.0	52.4	51.8	52.2	50.9
80°	39.6	39.1	38.4	39.6	38.4	39.1	39.6	39.6	38.7	39.6	38.7
82.5°	27.6	28.0	27.3	27.3	27.3	28.0	27.6	28.3	27.9	28.3	27.4
85°	12.8	12.4	11.8	11.8	11.8	12.4	12.8	12.8	13.6	13.0	13.0
87.5°	6.3	6.1	6.1	5.9	6.1	6.1	6.3	6.3	6.3	6.8	6.8
90°	19.6	19.7	19.9	20.0	19.9	19.7	19.6	19.5	19.6	19.8	20.0
92.5°	18.9	19.0	19.0	19.0	19.0	19.0	18.9	18.9	18.9	18.9	18.8
95°	37.2	37.0	36.7	36.4	36.7	37.0	37.2	37.5	37.6	37.6	37.6
97.5°	63.2	63.2	63.1	63.1	63.1	63.2	63.2	63.2	63.2	63.2	63.2
100°	81.0	80.8	80.6	80.6	80.6	80.8	81.0	81.0	81.1	81.1	81.1
102.5°	100.7	100.5	100.4	100.3	100.4	100.5	100.7	100.8	100.8	100.7	100.6
105°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.4	130.1	129.8
107.5°	160.7	160.2	159.5	159.0	159.5	160.2	160.7	161.4	161.6	161.5	161.4
110°	182.2	181.8	181.4	181.1	181.4	181.8	182.2	182.6	182.8	182.8	182.8



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	203.1	202.8	202.5	202.2	202.5	202.8	203.1	203.4	203.7	204.0	204.3
115°	236.3	235.9	235.5	235.1	235.5	235.9	236.3	236.7	236.9	237.1	237.3
117.5°	267.7	267.3	266.9	266.5	266.9	267.3	267.7	268.1	268.5	268.8	269.1
120°	289.8	289.4	289.0	288.6	289.0	289.4	289.8	290.2	290.4	290.4	290.4
122.5°	311.1	310.9	310.5	310.3	310.5	310.9	311.1	311.4	311.7	312.0	312.4
125°	343.7	343.6	343.4	343.3	343.4	343.6	343.7	343.8	344.0	344.4	344.8
127.5°	374.6	374.2	373.8	373.4	373.8	374.2	374.6	375.1	375.5	376.0	376.4
130°	396.6	396.1	395.5	395.1	395.5	396.1	396.6	397.1	397.5	397.8	398.1
132.5°	417.0	416.5	416.1	415.7	416.1	416.5	417.0	417.4	417.9	418.4	419.1
135°	449.1	448.7	448.3	447.9	448.3	448.7	449.1	449.5	449.8	449.9	450.0
137.5°	478.6	478.2	477.6	477.1	477.6	478.2	478.6	479.2	479.5	479.6	479.7
140°	498.9	498.4	497.8	497.3	497.8	498.4	498.9	499.4	499.6	499.6	499.6
142.5°	517.2	516.7	516.2	515.6	516.2	516.7	517.2	517.8	517.9	517.8	517.8
145°	544.7	544.2	543.7	543.2	543.7	544.2	544.7	545.3	545.4	545.3	545.2
147.5°	569.3	568.7	568.2	567.8	568.2	568.7	569.3	569.7	569.8	569.5	569.3
150°	584.9	584.5	584.2	583.8	584.2	584.5	584.9	585.3	585.3	584.9	584.5
152.5°	600.2	599.8	599.3	598.8	599.3	599.8	600.2	600.8	600.8	600.2	599.8
155°	620.2	619.8	619.4	619.0	619.4	619.8	620.2	620.6	620.4	619.8	619.1
157.5°	638.3	637.6	637.0	636.4	637.0	637.6	638.3	638.9	638.7	637.9	637.0
160°	648.8	648.2	647.8	647.2	647.8	648.2	648.8	649.3	649.2	648.4	647.6
162.5°	658.5	657.9	657.3	656.6	657.3	657.9	658.5	659.1	659.0	658.1	657.2
165°	670.9	670.3	669.6	669.0	669.6	670.3	670.9	671.6	671.5	670.5	669.6
167.5°	681.1	680.4	679.8	679.1	679.8	680.4	681.1	681.8	681.7	680.7	679.9
170°	686.6	685.8	685.0	684.2	685.0	685.8	686.6	687.4	687.3	686.4	685.5
172.5°	690.9	690.1	689.3	688.5	689.3	690.1	690.9	691.6	691.6	690.6	689.8
175°	695.4	694.7	693.9	693.1	693.9	694.7	695.4	696.2	696.2	695.2	694.3
177.5°	697.0	696.4	695.8	695.1	695.8	696.4	697.0	697.7	697.7	697.0	696.4
180°	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8
2.5°	739.7	742.4	746.4	750.6	753.2	758.2	759.6	762.0	764.1	769.1	774.3
5°	697.0	701.2	710.9	716.2	723.7	732.2	737.8	743.8	750.3	761.5	771.9
7.5°	651.3	658.1	670.3	680.2	690.8	703.1	711.9	723.7	733.3	749.2	764.4
10°	620.7	630.4	641.4	653.2	668.0	681.0	693.5	708.3	720.1	739.0	756.8
12.5°	593.3	594.7	610.4	623.4	643.6	659.7	674.1	693.1	704.7	727.2	745.9
15°	545.3	554.1	568.3	578.7	602.6	623.1	643.2	663.0	676.3	704.1	728.6
17.5°	504.9	513.0	527.6	544.5	561.7	582.0	608.1	629.0	647.1	678.8	707.9
20°	479.3	489.3	504.1	521.6	536.7	558.9	581.3	605.3	624.8	660.6	694.7
22.5°	457.5	465.4	477.4	494.6	511.1	531.4	556.0	582.1	602.6	641.2	675.7
25°	426.9	433.4	441.1	455.3	474.0	496.1	515.4	544.1	573.9	610.1	651.7
27.5°	399.3	403.9	410.7	423.3	437.7	458.4	479.8	507.0	537.1	576.2	620.3
30°	382.5	385.5	392.3	402.7	416.8	433.1	454.7	480.8	511.5	551.2	594.9
32.5°	367.9	370.6	375.0	384.9	397.2	411.1	430.6	456.6	485.9	524.9	573.4
35°	345.9	347.9	351.7	359.7	366.5	380.2	396.4	420.1	447.6	484.9	535.2
37.5°	323.9	326.7	329.1	332.5	341.2	350.1	364.3	384.3	411.3	448.9	496.9
40°	309.4	311.8	315.4	316.9	323.9	331.9	343.5	361.8	389.0	423.3	470.1
42.5°	294.8	297.1	299.3	301.0	307.1	314.2	324.6	340.3	364.4	397.8	444.1
45°	274.8	275.1	277.2	280.4	283.4	288.4	295.9	309.4	328.1	359.5	401.5
47.5°	254.6	254.9	255.3	256.7	260.0	264.5	269.4	280.5	297.2	322.3	363.1
50°	241.1	240.5	241.1	242.3	244.4	248.2	253.8	261.8	275.4	298.8	336.4
52.5°	228.1	228.0	227.6	228.1	229.7	232.3	236.3	243.1	255.3	276.8	309.9
55°	208.3	206.8	207.1	205.9	208.6	209.1	212.1	217.8	228.4	243.2	274.3
57.5°	187.1	185.9	184.6	184.3	184.0	185.6	188.0	192.4	200.6	213.6	238.8
60°	173.6	172.2	170.4	169.8	169.8	170.7	171.9	175.2	182.8	194.4	215.1
62.5°	159.9	158.2	157.2	155.6	155.1	156.1	157.2	159.5	165.1	175.9	193.8
65°	138.8	136.7	135.2	134.9	134.4	133.4	134.0	136.4	140.9	149.4	163.6
67.5°	117.5	115.6	115.2	113.5	112.6	112.8	112.6	114.7	117.3	124.7	135.3
70°	103.5	102.0	101.5	100.0	99.4	98.8	98.2	100.0	102.7	108.8	118.0
72.5°	89.4	88.1	86.8	85.6	85.7	85.1	85.0	86.0	88.2	94.0	101.0
75°	68.9	69.2	67.7	66.3	66.0	65.4	65.4	66.3	67.2	71.6	77.2
77.5°	50.0	49.7	48.5	48.0	47.8	47.1	47.8	48.3	48.8	51.8	55.9
80°	38.2	38.2	36.7	36.7	36.4	35.5	36.4	35.8	37.0	39.9	42.9
82.5°	27.3	26.8	26.8	26.3	26.2	25.6	26.0	26.5	27.0	29.1	30.8
85°	13.3	13.3	13.0	12.8	13.0	12.8	13.0	13.3	13.6	14.5	16.0
87.5°	6.9	7.2	6.9	6.5	5.9	5.6	5.4	5.3	5.5	5.4	5.3
90°	20.3	20.6	17.7	14.8	12.0	9.1	6.9	5.3	3.7	2.1	0.6
92.5°	18.8	18.7	18.0	17.3	16.6	16.0	15.1	13.9	12.8	11.6	10.5
95°	37.6	37.6	37.4	37.1	36.8	36.6	35.8	34.5	33.2	31.8	30.6
97.5°	63.2	63.2	62.7	62.3	61.8	61.2	60.4	59.3	58.1	57.0	55.8
100°	81.1	81.1	80.7	80.3	79.9	79.5	78.8	77.8	76.8	75.7	74.6
102.5°	100.5	100.4	99.9	99.4	98.9	98.4	97.8	96.9	96.1	95.2	94.4
105°	129.6	129.4	129.0	128.8	128.6	128.3	127.9	127.5	127.1	126.7	126.4
107.5°	161.3	161.2	161.2	161.2	161.2	161.2	160.9	160.3	159.8	159.1	158.6
110°	182.8	182.8	182.8	182.8	182.8	182.8	182.4	181.6	180.9	180.1	179.3



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	204.6	204.9	205.0	205.1	205.3	205.3	205.0	204.2	203.4	202.6	201.8
115°	237.3	237.5	237.7	238.0	238.3	238.5	238.3	237.5	236.7	235.9	235.1
117.5°	269.4	269.7	270.5	271.2	271.9	272.6	272.4	271.4	270.4	269.3	268.3
120°	290.4	290.4	291.4	292.5	293.5	294.5	294.5	293.5	292.5	291.4	290.4
122.5°	312.7	313.0	313.7	314.4	315.1	315.9	315.6	314.3	313.1	311.9	310.6
125°	345.2	345.6	346.0	346.4	346.8	347.2	346.8	345.6	344.4	343.3	342.1
127.5°	376.9	377.4	377.9	378.3	378.8	379.3	378.7	377.2	375.8	374.3	372.8
130°	398.3	398.5	398.8	399.1	399.3	399.6	398.9	397.2	395.5	393.8	392.1
132.5°	419.6	420.2	420.2	420.1	420.0	420.0	419.2	417.9	416.5	415.1	413.8
135°	450.1	450.3	450.0	449.8	449.5	449.2	448.4	446.9	445.5	444.1	442.7
137.5°	479.8	479.9	479.6	479.3	478.9	478.6	477.8	476.7	475.5	474.3	473.1
140°	499.6	499.6	499.0	498.4	497.7	497.0	496.1	495.0	493.8	492.6	491.5
142.5°	517.6	517.5	517.1	516.7	516.2	515.8	514.9	513.8	512.6	511.4	510.2
145°	545.0	544.9	544.2	543.4	542.6	541.8	541.0	540.0	539.1	538.2	537.3
147.5°	568.9	568.7	568.2	567.6	567.1	566.6	565.8	564.7	563.6	562.4	561.4
150°	584.2	583.8	583.2	582.7	582.2	581.6	581.0	580.2	579.4	578.6	577.8
152.5°	599.3	598.8	598.2	597.5	596.9	596.3	595.6	594.8	594.0	593.2	592.4
155°	618.5	617.8	617.4	617.0	616.6	616.2	615.8	615.4	615.1	614.7	614.3
157.5°	636.1	635.3	635.0	634.8	634.5	634.3	634.1	633.7	633.5	633.3	633.0
160°	646.8	646.0	645.9	645.8	645.6	645.5	645.3	645.1	644.8	644.5	644.3
162.5°	656.3	655.5	655.3	655.2	655.1	654.9	654.8	654.7	654.7	654.7	654.6
165°	668.7	667.8	667.8	667.8	667.8	667.8	667.9	668.0	668.1	668.2	668.4
167.5°	678.9	678.0	678.0	678.0	678.1	678.1	678.3	678.7	679.1	679.5	679.9
170°	684.6	683.7	683.8	683.9	684.0	684.2	684.4	684.8	685.2	685.6	686.0
172.5°	688.8	687.9	688.0	688.2	688.2	688.4	688.6	689.0	689.4	689.8	690.2
175°	693.4	692.4	692.8	693.0	693.2	693.6	693.9	694.3	694.7	695.1	695.4
177.5°	695.8	695.1	695.4	695.6	695.8	696.0	696.2	696.6	696.9	697.2	697.5
180°	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8	769.8
2.5°	773.8	775.0	778.8	782.6	786.8	788.0	789.9	788.2	787.7	792.3	795.6
5°	776.0	781.3	791.7	801.1	809.1	814.8	820.7	823.1	827.5	833.7	841.4
7.5°	773.5	783.9	800.2	814.0	828.9	839.8	848.3	855.5	864.2	876.0	888.8
10°	770.7	784.6	804.4	821.3	839.6	853.5	865.1	876.3	889.3	905.6	922.4
12.5°	765.5	782.0	806.8	826.7	850.2	864.0	879.5	903.7	917.7	940.4	964.1
15°	755.0	773.3	807.9	832.5	859.1	885.2	913.9	936.9	960.0	973.4	1006.8
17.5°	739.4	766.4	804.7	833.4	867.2	908.2	940.4	966.6	993.2	1014.8	1031.6
20°	726.9	756.2	799.9	834.3	874.5	918.6	955.6	982.2	1005.3	1023.3	1033.7
22.5°	711.1	747.9	790.5	830.8	882.1	925.7	964.6	985.6	1004.8	1013.6	1017.6
25°	686.0	730.5	778.6	827.8	885.7	931.9	967.4	980.2	985.8	977.2	963.0
27.5°	659.2	708.6	765.0	822.2	883.5	927.9	953.3	951.3	941.8	914.0	891.8
30°	639.1	693.5	754.1	816.5	878.1	921.2	936.0	921.2	899.7	868.6	836.9
32.5°	618.0	674.3	742.5	808.5	868.2	906.1	909.3	883.8	850.4	815.2	775.6
35°	586.1	647.1	720.6	790.5	847.0	871.0	856.7	811.8	772.1	724.0	670.1
37.5°	550.0	617.3	691.2	764.1	815.4	821.7	786.4	739.0	683.1	626.5	563.1
40°	523.1	594.4	670.4	744.0	789.3	782.8	737.8	685.8	619.2	550.0	491.1
42.5°	498.9	570.2	647.7	719.9	756.2	738.3	685.8	621.9	550.3	485.1	431.3
45°	457.1	530.4	609.7	679.5	700.3	668.0	598.5	527.5	457.1	402.7	360.0
47.5°	416.5	489.0	567.5	628.9	636.3	592.9	516.9	443.9	383.3	339.0	309.0
50°	386.7	459.5	537.3	592.0	589.6	537.3	459.1	389.6	339.1	303.2	283.1
52.5°	359.9	428.6	503.4	553.2	540.7	483.5	409.0	347.3	305.7	277.7	259.4
55°	318.3	381.9	453.0	492.9	469.8	406.5	343.5	293.7	263.0	242.0	227.8
57.5°	277.0	336.7	397.4	422.1	396.6	338.1	285.6	249.5	226.4	210.8	201.6
60°	251.4	303.6	357.7	379.0	348.5	296.4	255.0	222.8	204.1	191.4	183.2
62.5°	225.9	272.5	323.6	335.2	307.3	263.3	226.6	199.8	184.5	173.2	165.4
65°	191.2	229.3	268.1	275.8	250.0	215.9	187.0	169.5	155.9	147.7	141.4
67.5°	156.8	187.4	214.8	221.0	198.5	174.9	153.9	138.8	129.5	122.6	117.4
70°	136.4	160.7	183.2	188.1	170.1	149.1	133.2	121.0	112.7	106.8	101.8
72.5°	114.9	135.1	153.8	157.2	142.4	126.4	113.3	103.7	96.4	92.6	87.8
75°	87.9	99.7	114.2	115.1	105.4	95.5	85.5	79.3	75.4	70.7	68.4
77.5°	62.0	71.3	79.6	81.2	75.4	68.8	63.1	58.2	55.0	52.8	50.6
80°	47.4	54.7	58.3	60.4	56.2	51.5	48.2	45.0	42.9	41.4	39.9
82.5°	33.8	38.4	41.7	43.3	41.0	38.3	34.9	33.1	31.5	30.3	29.8
85°	17.2	19.3	21.3	21.9	21.3	20.1	18.4	18.4	17.4	17.2	17.2
87.5°	6.3	7.6	7.9	9.0	9.0	9.5	10.1	10.4	10.8	10.5	10.1
90°	2.1	3.7	5.3	6.9	9.1	12.0	14.8	17.7	20.6	20.3	20.0
92.5°	11.6	12.8	13.9	15.1	16.0	16.6	17.3	18.0	18.7	18.8	18.8
95°	31.8	33.2	34.5	35.8	36.6	36.8	37.1	37.4	37.6	37.6	37.6
97.5°	57.0	58.1	59.3	60.4	61.2	61.8	62.3	62.7	63.2	63.2	63.2
100°	75.7	76.8	77.8	78.8	79.5	79.9	80.3	80.7	81.1	81.1	81.1
102.5°	95.2	96.1	96.9	97.8	98.4	98.9	99.4	99.9	100.4	100.5	100.6
105°	126.7	127.1	127.5	127.9	128.3	128.6	128.8	129.0	129.4	129.6	129.8
107.5°	159.1	159.8	160.3	160.9	161.2	161.2	161.2	161.2	161.2	161.3	161.4
110°	180.1	180.9	181.6	182.4	182.8	182.8	182.8	182.8	182.8	182.8	182.8





TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	202.6	203.4	204.2	205.0	205.3	205.3	205.1	205.0	204.9	204.6	204.3
115°	235.9	236.7	237.5	238.3	238.5	238.3	238.0	237.7	237.5	237.3	237.3
117.5°	269.3	270.4	271.4	272.4	272.6	271.9	271.2	270.5	269.7	269.4	269.1
120°	291.4	292.5	293.5	294.5	294.5	293.5	292.5	291.4	290.4	290.4	290.4
122.5°	311.9	313.1	314.3	315.6	315.9	315.1	314.4	313.7	313.0	312.7	312.4
125°	343.3	344.4	345.6	346.8	347.2	346.8	346.4	346.0	345.6	345.2	344.8
127.5°	374.3	375.8	377.2	378.7	379.3	378.8	378.3	377.9	377.4	376.9	376.4
130°	393.8	395.5	397.2	398.9	399.6	399.3	399.1	398.8	398.5	398.3	398.1
132.5°	415.1	416.5	417.9	419.2	420.0	420.0	420.1	420.2	420.2	419.6	419.1
135°	444.1	445.5	446.9	448.4	449.2	449.5	449.8	450.0	450.3	450.1	450.0
137.5°	474.3	475.5	476.7	477.8	478.6	478.9	479.3	479.6	479.9	479.8	479.7
140°	492.6	493.8	495.0	496.1	497.0	497.7	498.4	499.0	499.6	499.6	499.6
142.5°	511.4	512.6	513.8	514.9	515.8	516.2	516.7	517.1	517.5	517.6	517.8
145°	538.2	539.1	540.0	541.0	541.8	542.6	543.4	544.2	544.9	545.0	545.2
147.5°	562.4	563.6	564.7	565.8	566.6	567.1	567.6	568.2	568.7	568.9	569.3
150°	578.6	579.4	580.2	581.0	581.6	582.2	582.7	583.2	583.8	584.2	584.5
152.5°	593.2	594.0	594.8	595.6	596.3	596.9	597.5	598.2	598.8	599.3	599.8
155°	614.7	615.1	615.4	615.8	616.2	616.6	617.0	617.4	617.8	618.5	619.1
157.5°	633.3	633.5	633.7	634.1	634.3	634.5	634.8	635.0	635.3	636.1	637.0
160°	644.5	644.8	645.1	645.3	645.5	645.6	645.8	645.9	646.0	646.8	647.6
162.5°	654.7	654.7	654.7	654.8	654.9	655.1	655.2	655.3	655.5	656.3	657.2
165°	668.2	668.1	668.0	667.9	667.8	667.8	667.8	667.8	667.8	668.7	669.6
167.5°	679.5	679.1	678.7	678.3	678.1	678.1	678.0	678.0	678.0	678.9	679.9
170°	685.6	685.2	684.8	684.4	684.2	684.0	683.9	683.8	683.7	684.6	685.5
172.5°	689.8	689.4	689.0	688.6	688.4	688.2	688.2	688.0	687.9	688.8	689.8
175°	695.1	694.7	694.3	693.9	693.6	693.2	693.0	692.8	692.4	693.4	694.3
177.5°	697.2	696.9	696.6	696.2	696.0	695.8	695.6	695.4	695.1	695.8	696.4
180°	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	769.8	769.8	769.8	769.8	769.8	769.8	769.8
2.5°	798.4	801.8	801.8	802.2	806.0	805.6	805.3
5°	849.7	854.7	855.3	860.6	864.2	863.0	859.8
7.5°	898.0	907.4	914.5	918.5	923.1	926.0	924.7
10°	936.4	950.0	958.2	963.8	970.7	975.7	973.9
12.5°	971.1	987.4	998.7	1008.4	1009.2	1015.7	1011.3
15°	1025.4	1042.6	1044.3	1051.5	1057.1	1056.5	1056.8
17.5°	1043.3	1048.8	1050.0	1050.1	1050.2	1048.1	1043.6
20°	1037.0	1034.9	1029.8	1026.0	1019.2	1018.3	1012.4
22.5°	1006.6	1000.1	987.5	979.1	968.5	965.7	964.1
25°	947.0	932.5	912.4	893.2	887.8	877.5	880.4
27.5°	865.1	842.6	820.8	805.2	791.1	775.5	780.0
30°	807.6	782.2	751.5	727.8	712.7	697.9	695.2
32.5°	739.0	701.7	667.4	646.6	623.4	614.1	603.9
35°	620.7	584.3	550.2	521.0	504.1	491.1	479.3
37.5°	514.2	472.4	444.9	421.2	409.0	401.6	403.4
40°	448.2	411.5	391.4	373.4	362.1	356.8	358.0
42.5°	394.7	367.3	350.7	338.3	330.4	327.4	326.7
45°	334.0	318.6	305.0	297.9	294.1	290.8	288.8
47.5°	292.6	280.0	272.4	268.2	264.7	261.5	261.4
50°	267.8	259.4	254.1	249.7	247.0	244.6	246.8
52.5°	248.8	241.2	235.9	232.0	230.9	228.8	228.8
55°	220.7	214.8	211.0	207.4	205.7	204.5	203.0
57.5°	195.1	189.5	186.0	183.7	180.4	179.2	178.7
60°	176.9	172.5	168.9	166.0	164.5	162.2	162.2
62.5°	160.1	155.7	152.3	150.1	147.7	146.7	146.9
65°	135.8	132.2	129.0	126.6	126.0	124.3	124.8
67.5°	113.4	111.1	107.7	106.3	105.2	104.3	103.5
70°	98.5	96.2	94.3	92.6	91.7	91.7	91.7
72.5°	86.0	83.1	82.1	79.9	80.3	79.4	78.4
75°	66.5	64.8	63.9	63.0	61.6	61.6	61.6
77.5°	49.0	48.5	47.4	46.4	46.1	45.8	45.9
80°	37.9	37.5	37.0	37.0	36.4	36.1	35.5
82.5°	29.1	28.4	28.0	27.7	27.6	27.6	27.5
85°	16.6	16.0	16.0	16.2	15.7	15.7	16.0
87.5°	10.4	10.3	10.1	10.1	10.3	10.1	10.1
90°	19.8	19.6	19.5	19.6	19.7	19.9	20.0
92.5°	18.9	18.9	18.9	18.9	19.0	19.0	19.0
95°	37.6	37.6	37.5	37.2	37.0	36.7	36.4
97.5°	63.2	63.2	63.2	63.2	63.2	63.1	63.1
100°	81.1	81.1	81.0	81.0	80.8	80.6	80.6
102.5°	100.7	100.8	100.8	100.7	100.5	100.4	100.3
105°	130.1	130.4	130.5	130.5	130.5	130.5	130.5
107.5°	161.5	161.6	161.4	160.7	160.2	159.5	159.0
110°	182.8	182.8	182.6	182.2	181.8	181.4	181.1



TEST NUMBER: P331502-927

CATALOG NUMBER: S122DIW-S485D710U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	204.0	203.7	203.4	203.1	202.8	202.5	202.2
115°	237.1	236.9	236.7	236.3	235.9	235.5	235.1
117.5°	268.8	268.5	268.1	267.7	267.3	266.9	266.5
120°	290.4	290.4	290.2	289.8	289.4	289.0	288.6
122.5°	312.0	311.7	311.4	311.1	310.9	310.5	310.3
125°	344.4	344.0	343.8	343.7	343.6	343.4	343.3
127.5°	376.0	375.5	375.1	374.6	374.2	373.8	373.4
130°	397.8	397.5	397.1	396.6	396.1	395.5	395.1
132.5°	418.4	417.9	417.4	417.0	416.5	416.1	415.7
135°	449.9	449.8	449.5	449.1	448.7	448.3	447.9
137.5°	479.6	479.5	479.2	478.6	478.2	477.6	477.1
140°	499.6	499.6	499.4	498.9	498.4	497.8	497.3
142.5°	517.8	517.9	517.8	517.2	516.7	516.2	515.6
145°	545.3	545.4	545.3	544.7	544.2	543.7	543.2
147.5°	569.5	569.8	569.7	569.3	568.7	568.2	567.8
150°	584.9	585.3	585.3	584.9	584.5	584.2	583.8
152.5°	600.2	600.8	600.8	600.2	599.8	599.3	598.8
155°	619.8	620.4	620.6	620.2	619.8	619.4	619.0
157.5°	637.9	638.7	638.9	638.3	637.6	637.0	636.4
160°	648.4	649.2	649.3	648.8	648.2	647.8	647.2
162.5°	658.1	659.0	659.1	658.5	657.9	657.3	656.6
165°	670.5	671.5	671.6	670.9	670.3	669.6	669.0
167.5°	680.7	681.7	681.8	681.1	680.4	679.8	679.1
170°	686.4	687.3	687.4	686.6	685.8	685.0	684.2
172.5°	690.6	691.6	691.6	690.9	690.1	689.3	688.5
175°	695.2	696.2	696.2	695.4	694.7	693.9	693.1
177.5°	697.0	697.7	697.7	697.0	696.4	695.8	695.1
180°	696.6	696.6	696.6	696.6	696.6	696.6	696.6

(END OF REPORT)