

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331547-927

Luminaire Tested: **S122DIW-S675D1240U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331547-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S675D1240U927-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1240 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6067.7 lumens
Efficiency: N/A
Efficacy: 98.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331547-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

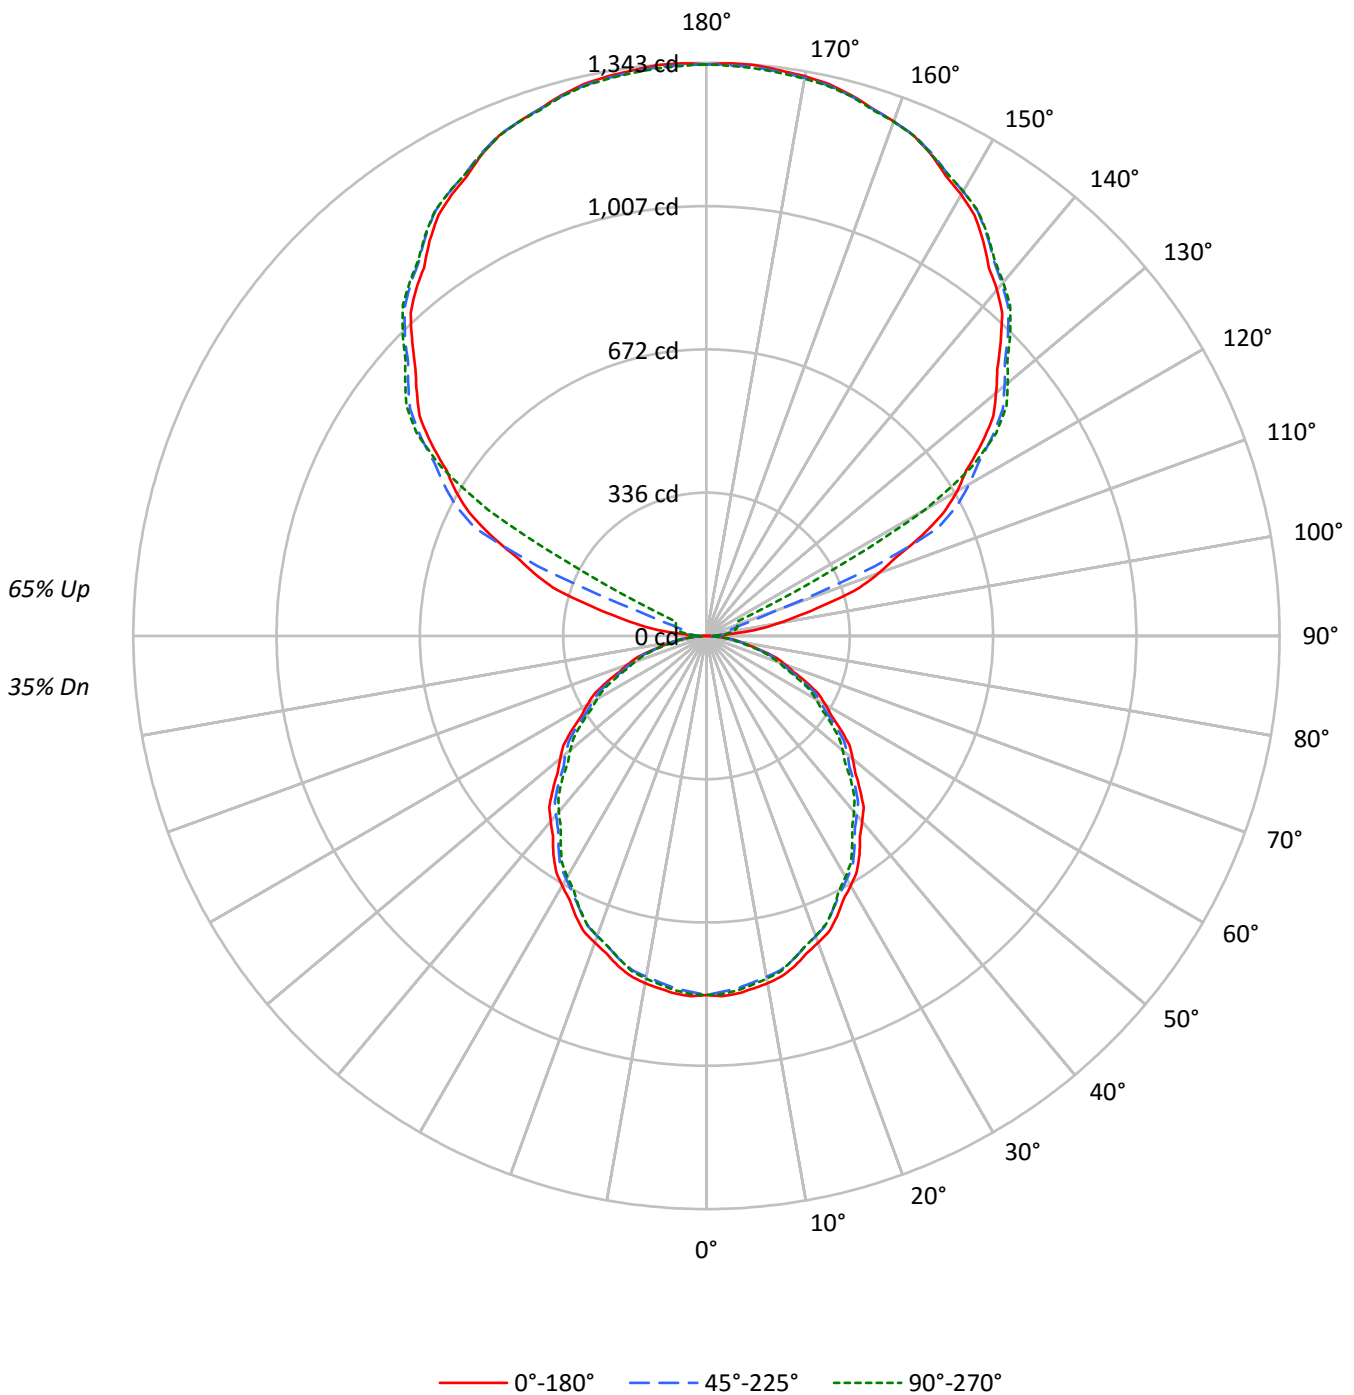



TEST NUMBER: P331547-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43	35
1	94	90	86	83	85	82	79	76	66	64	62	51	50	48	38	37	36	30
2	86	79	73	68	78	71	66	62	58	54	51	45	42	40	33	32	30	25
3	78	69	62	56	71	63	57	52	51	46	43	40	37	34	29	27	26	21
4	72	61	53	48	65	56	49	44	45	40	36	35	32	29	26	24	22	18
5	66	54	46	41	59	50	43	37	40	35	31	32	28	25	24	21	19	16
6	60	49	41	35	54	44	37	32	36	31	27	29	25	22	21	19	17	14
7	56	44	36	31	50	40	33	28	33	28	24	26	22	19	20	17	15	12
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	15	13	11
9	48	36	29	24	43	33	27	22	27	22	19	22	18	15	17	14	12	10
10	45	33	26	21	41	30	24	20	25	20	17	20	16	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13580	13580	13580
5°	13632	13434	13514
10°	13550	13298	13365
15°	13382	13125	13112
20°	13144	12866	12854
25°	12909	12549	12549
30°	12603	12258	12152
35°	12321	11907	11732
40°	11965	11556	11335
45°	11615	11209	10930
50°	11233	10846	10462
55°	10835	10427	10038
60°	10395	9923	9558
65°	9918	9425	8993
70°	9314	8818	8398
75°	8478	8122	7923
80°	7522	7290	6918
85°	6150	5835	5243



TEST NUMBER: P331547-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.1	1.3
10°-20°	222.5	3.7
20°-30°	327.1	5.4
30°-40°	379.9	6.3
40°-50°	379.5	6.3
50°-60°	331.0	5.5
60°-70°	244.7	4.0
70°-80°	138.6	2.3
80°-90°	40.6	0.7
90°-100°	44.7	0.7
100°-110°	163.8	2.7
110°-120°	437.9	7.2
120°-130°	722.9	11.9
130°-140°	768.8	12.7
140°-150°	714.5	11.8
150°-160°	574.5	9.5
160°-170°	370.2	6.1
170°-180°	127.4	2.1
0°-30°	628.7	10.4
0°-40°	1008.6	16.6
0°-60°	1719.1	28.3
0°-90°	2143.1	35.3
90°-120°	646.4	10.7
90°-150°	2852.5	47.0
90°-180°	3925.0	64.7
0°-180°	6067.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	841	841	841	841	841	
5°	841	838	829	835	834	80
15°	801	795	785	788	784	225
25°	725	718	704	706	704	333
35°	625	617	604	599	595	390
45°	509	503	491	482	479	392
55°	385	380	370	361	357	344
65°	260	254	247	240	235	257
75°	136	134	130	126	127	145
85°	33	32	32	29	28	38
90°	1	12	19	24	26	5
95°	63	33	38	42	42	77
105°	295	307	59	69	74	315
115°	557	574	598	170	80	548
125°	788	801	819	825	828	702
135°	975	990	999	1008	1007	753
145°	1131	1131	1146	1152	1148	707
155°	1245	1238	1248	1253	1246	574
165°	1312	1307	1309	1315	1309	371
175°	1342	1336	1337	1343	1334	128
180°	1339	1339	1339	1339	1339	



TEST NUMBER: P331547-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1
2.5°	844.9	844.2	843.5	842.8	842.1	840.9	839.3	837.7	836.1	834.6	836.0
5°	841.1	840.3	839.6	838.9	838.2	836.9	834.9	832.9	830.9	828.9	830.4
7.5°	833.6	832.5	831.4	830.3	829.2	827.6	825.6	823.6	821.6	819.5	820.9
10°	826.5	825.2	823.9	822.7	821.5	819.8	817.6	815.5	813.3	811.1	812.5
12.5°	816.8	815.7	814.5	813.4	812.3	810.7	808.5	806.4	804.2	802.1	803.1
15°	800.6	799.5	798.4	797.4	796.3	794.6	792.3	789.9	787.6	785.2	786.0
17.5°	779.9	778.8	777.8	776.7	775.6	773.9	771.5	769.1	766.8	764.4	765.2
20°	765.0	764.0	762.9	761.8	760.7	758.9	756.4	753.9	751.4	748.8	749.4
22.5°	750.1	748.6	747.1	745.6	744.1	742.2	739.8	737.4	735.1	732.7	732.8
25°	724.6	723.2	721.8	720.3	718.8	716.6	713.5	710.5	707.4	704.4	704.7
27.5°	695.5	694.2	692.9	691.6	690.3	688.5	686.0	683.7	681.2	678.8	678.3
30°	676.0	674.6	673.2	671.8	670.3	668.3	665.6	662.9	660.2	657.5	657.0
32.5°	655.4	654.2	653.1	651.9	650.8	648.8	645.9	643.1	640.2	637.4	636.4
35°	625.1	623.4	621.5	619.7	617.9	615.6	612.8	609.8	607.0	604.1	603.0
37.5°	591.0	589.4	587.8	586.2	584.7	582.4	579.6	576.7	573.9	570.9	569.6
40°	567.7	566.3	564.8	563.4	562.0	559.8	556.9	554.1	551.2	548.3	546.7
42.5°	545.1	543.6	542.2	540.7	539.3	537.2	534.2	531.4	528.5	525.7	523.9
45°	508.7	507.4	506.1	504.9	503.7	501.7	499.0	496.3	493.6	490.9	488.9
47.5°	472.5	471.3	470.1	468.9	467.7	465.7	462.9	460.1	457.3	454.5	452.4
50°	447.2	446.3	445.4	444.5	443.6	441.9	439.4	436.9	434.4	431.8	429.4
52.5°	422.6	421.4	420.3	419.1	417.9	416.1	413.8	411.4	409.0	406.6	404.6
55°	384.9	383.9	382.8	381.7	380.6	379.0	376.8	374.7	372.6	370.4	368.2
57.5°	347.1	346.3	345.4	344.5	343.6	342.1	339.7	337.3	334.9	332.6	330.4
60°	321.9	321.2	320.4	319.7	319.0	317.3	314.9	312.4	309.8	307.3	305.3
62.5°	297.3	296.1	295.0	293.8	292.7	291.1	289.2	287.2	285.3	283.4	281.5
65°	259.6	258.5	257.5	256.4	255.2	253.8	252.1	250.3	248.4	246.7	245.0
67.5°	221.3	220.4	219.5	218.6	217.8	216.6	214.9	213.3	211.8	210.1	208.8
70°	197.3	196.6	195.9	195.2	194.5	193.3	191.6	190.0	188.5	186.8	185.5
72.5°	172.8	172.0	171.3	170.6	169.8	169.0	167.9	166.9	165.9	164.8	163.6
75°	135.9	135.5	135.1	134.8	134.4	133.8	132.9	132.0	131.1	130.2	129.1
77.5°	102.9	102.3	101.6	101.0	100.4	100.0	99.6	99.2	98.9	98.5	98.0
80°	80.9	80.7	80.5	80.3	80.2	79.9	79.5	79.1	78.8	78.4	77.9
82.5°	60.2	60.1	60.1	60.0	60.0	59.9	59.7	59.5	59.3	59.0	58.4
85°	33.2	33.0	32.8	32.6	32.4	32.2	32.1	31.9	31.7	31.5	31.0
87.5°	11.8	12.0	12.2	12.4	12.6	12.7	12.8	12.8	12.9	12.9	12.8
90°	1.0	3.3	5.7	8.1	10.5	12.5	14.2	15.9	17.7	19.4	20.4
92.5°	19.6	19.3	19.2	18.9	18.7	19.0	19.9	20.8	21.6	22.5	23.1
95°	63.0	55.8	48.8	41.7	34.5	31.8	33.3	34.8	36.3	37.8	38.9
97.5°	125.0	105.0	84.9	65.0	44.9	36.6	40.1	43.6	47.1	50.6	51.4
100°	171.5	142.0	112.5	83.0	53.6	40.6	44.3	47.9	51.6	55.2	57.0
102.5°	222.7	216.4	210.2	204.0	197.7	179.3	148.6	118.0	87.4	56.8	59.0
105°	294.6	301.0	307.5	313.9	320.4	294.3	235.5	176.7	117.9	59.1	61.5
107.5°	376.6	381.8	387.0	392.2	397.4	364.8	294.3	223.8	153.3	82.8	80.3
110°	429.3	433.8	438.3	442.8	447.3	418.5	356.3	294.1	231.8	169.6	148.1



TEST NUMBER: P331547-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	478.9	482.9	486.9	490.9	495.0	489.3	473.9	458.5	443.1	427.7	349.2
115°	557.2	560.9	564.5	568.2	571.9	576.4	581.8	587.2	592.6	597.9	498.2
117.5°	627.2	631.3	635.3	639.4	643.6	647.5	651.1	654.8	658.5	662.3	638.1
120°	678.3	681.6	684.8	688.0	691.3	694.8	698.7	702.6	706.5	710.3	712.9
122.5°	721.8	725.2	728.6	732.0	735.4	739.2	743.4	747.6	751.9	756.1	757.6
125°	787.8	790.6	793.4	796.2	799.0	802.5	806.6	810.6	814.8	818.9	820.4
127.5°	847.7	850.8	853.9	857.1	860.2	863.2	866.3	869.3	872.4	875.4	877.7
130°	885.7	889.1	892.6	896.0	899.5	902.4	904.8	907.1	909.5	911.9	914.3
132.5°	924.5	927.4	930.3	933.3	936.2	938.8	941.2	943.6	945.9	948.3	950.3
135°	974.9	978.3	981.8	985.2	988.6	991.3	993.2	995.2	997.1	999.1	1001.2
137.5°	1025.8	1028.3	1030.6	1033.1	1035.5	1037.8	1040.0	1042.2	1044.3	1046.6	1048.7
140°	1059.1	1060.9	1062.6	1064.3	1066.0	1068.1	1070.5	1072.9	1075.2	1077.6	1079.5
142.5°	1087.1	1088.6	1090.2	1091.7	1093.3	1095.4	1098.1	1100.8	1103.5	1106.3	1108.0
145°	1130.8	1130.7	1130.4	1130.2	1130.0	1131.7	1135.4	1139.1	1142.7	1146.4	1147.9
147.5°	1169.0	1168.2	1167.4	1166.6	1165.8	1167.2	1170.8	1174.4	1178.1	1181.6	1182.8
150°	1193.9	1192.4	1190.9	1189.3	1187.8	1188.8	1192.2	1195.7	1199.1	1202.6	1203.9
152.5°	1214.8	1213.1	1211.4	1209.7	1208.1	1208.9	1212.1	1215.4	1218.7	1221.9	1223.3
155°	1245.2	1243.3	1241.3	1239.4	1237.5	1237.8	1240.4	1242.9	1245.5	1248.2	1249.4
157.5°	1269.1	1267.4	1265.7	1264.2	1262.5	1262.6	1264.4	1266.2	1268.0	1269.9	1271.3
160°	1283.0	1281.8	1280.4	1279.1	1277.9	1277.9	1279.1	1280.4	1281.8	1283.0	1284.3
162.5°	1295.5	1294.1	1292.8	1291.6	1290.2	1290.1	1291.3	1292.4	1293.6	1294.7	1296.1
165°	1312.1	1310.8	1309.5	1308.2	1306.9	1306.6	1307.3	1307.9	1308.5	1309.2	1310.7
167.5°	1324.5	1323.2	1321.9	1320.6	1319.3	1319.0	1319.6	1320.2	1320.8	1321.4	1322.9
170°	1331.5	1330.2	1328.9	1327.6	1326.3	1325.9	1326.3	1326.7	1327.1	1327.6	1329.1
172.5°	1336.1	1334.8	1333.6	1332.2	1330.9	1330.5	1330.9	1331.3	1331.8	1332.2	1333.7
175°	1342.1	1340.6	1339.1	1337.6	1336.1	1335.5	1336.0	1336.4	1336.9	1337.3	1338.8
177.5°	1343.1	1341.9	1340.7	1339.5	1338.2	1337.8	1337.9	1338.1	1338.2	1338.5	1339.7
180°	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2



TEST NUMBER: P331547-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1
2.5°	837.4	838.9	840.3	840.9	840.6	840.3	840.0	839.8
5°	831.8	833.2	834.6	835.2	834.9	834.5	834.2	833.8
7.5°	822.4	823.9	825.3	825.8	825.4	825.1	824.7	824.3
10°	814.0	815.5	816.9	817.3	816.8	816.3	815.7	815.2
12.5°	804.1	805.1	806.1	806.4	806.0	805.6	805.3	804.9
15°	786.7	787.4	788.1	788.1	787.1	786.2	785.4	784.4
17.5°	766.0	766.8	767.7	767.7	766.8	766.0	765.1	764.2
20°	750.0	750.5	751.0	750.9	750.2	749.5	748.8	748.1
22.5°	732.9	733.0	733.1	732.9	732.5	732.1	731.7	731.3
25°	705.1	705.4	705.8	705.8	705.4	705.1	704.7	704.4
27.5°	677.7	677.2	676.7	676.0	675.1	674.2	673.4	672.5
30°	656.4	655.8	655.3	654.7	653.9	653.2	652.5	651.8
32.5°	635.5	634.5	633.5	632.7	632.0	631.3	630.5	629.8
35°	602.0	600.9	599.8	598.8	597.9	597.0	596.1	595.2
37.5°	568.3	567.0	565.6	564.5	563.6	562.8	562.0	561.1
40°	545.1	543.4	541.9	540.7	540.0	539.2	538.5	537.8
42.5°	522.1	520.4	518.6	517.2	516.2	515.2	514.2	513.2
45°	487.0	485.0	483.0	481.6	480.9	480.2	479.5	478.7
47.5°	450.4	448.2	446.2	444.6	443.5	442.5	441.5	440.5
50°	426.8	424.3	421.8	420.1	419.1	418.3	417.4	416.5
52.5°	402.4	400.4	398.3	396.6	395.5	394.3	393.1	391.9
55°	366.1	363.9	361.8	360.2	359.3	358.5	357.5	356.6
57.5°	328.3	326.1	324.1	322.7	321.9	321.3	320.6	319.9
60°	303.3	301.3	299.4	298.2	297.6	297.1	296.5	296.0
62.5°	279.7	277.9	276.1	274.8	274.1	273.4	272.7	272.0
65°	243.4	241.8	240.2	238.9	238.1	237.1	236.2	235.4
67.5°	207.6	206.4	205.1	204.1	203.4	202.6	201.9	201.2
70°	184.3	183.1	181.8	180.8	180.1	179.4	178.6	177.9
72.5°	162.3	161.1	159.8	158.8	158.3	157.7	157.2	156.5
75°	128.0	127.0	125.9	125.6	125.9	126.3	126.6	127.0
77.5°	97.4	96.9	96.3	95.9	95.3	94.8	94.3	93.8
80°	77.4	76.8	76.3	75.8	75.5	75.1	74.8	74.4
82.5°	57.7	57.0	56.3	55.9	55.8	55.8	55.7	55.6
85°	30.5	29.9	29.4	29.0	28.8	28.7	28.5	28.3
87.5°	12.5	12.3	12.0	12.0	11.9	11.8	11.7	11.7
90°	21.5	22.6	23.7	24.5	24.9	25.3	25.7	26.1
92.5°	23.6	24.2	24.7	25.1	25.3	25.7	25.9	26.1
95°	39.9	41.0	42.1	42.5	42.3	42.1	41.9	41.7
97.5°	52.3	53.2	54.0	54.6	54.8	55.1	55.4	55.6
100°	58.7	60.4	62.1	63.2	63.6	64.1	64.5	65.0
102.5°	61.2	63.5	65.8	67.2	67.7	68.4	69.0	69.6
105°	63.8	66.2	68.6	70.2	71.1	71.9	72.8	73.7
107.5°	78.0	75.5	73.1	72.3	73.2	74.1	74.9	75.8
110°	126.5	105.0	83.4	73.1	74.0	74.9	75.7	76.5



TEST NUMBER: P331547-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	270.6	192.1	113.5	74.5	75.3	76.0	76.6	77.3
115°	398.5	298.8	199.1	141.5	126.0	110.5	95.0	79.5
117.5°	614.0	589.9	565.8	528.2	477.3	426.4	375.4	324.4
120°	715.5	718.0	720.6	707.4	678.3	649.3	620.2	591.1
122.5°	759.1	760.7	762.2	760.2	754.6	748.9	743.3	737.6
125°	821.9	823.4	824.9	825.9	826.6	827.3	827.9	828.5
127.5°	879.8	882.0	884.2	885.4	885.5	885.7	885.7	885.9
130°	916.6	919.0	921.3	922.4	922.2	922.0	921.8	921.5
132.5°	952.4	954.3	956.4	957.3	957.1	956.9	956.6	956.5
135°	1003.4	1005.5	1007.7	1008.5	1008.1	1007.7	1007.3	1006.9
137.5°	1050.8	1052.9	1055.0	1055.7	1054.9	1054.2	1053.5	1052.7
140°	1081.5	1083.4	1085.4	1085.8	1084.7	1083.6	1082.5	1081.5
142.5°	1109.8	1111.6	1113.3	1113.6	1112.6	1111.5	1110.4	1109.4
145°	1149.4	1150.9	1152.4	1152.6	1151.5	1150.5	1149.4	1148.3
147.5°	1183.9	1185.0	1186.1	1186.2	1185.3	1184.4	1183.5	1182.6
150°	1205.1	1206.5	1207.8	1207.8	1206.8	1205.7	1204.6	1203.6
152.5°	1224.6	1225.8	1227.2	1227.1	1225.7	1224.2	1222.8	1221.4
155°	1250.7	1252.0	1253.3	1253.1	1251.3	1249.7	1247.9	1246.2
157.5°	1272.8	1274.2	1275.7	1275.6	1273.9	1272.2	1270.6	1268.8
160°	1285.6	1286.9	1288.2	1288.1	1286.6	1285.1	1283.6	1282.1
162.5°	1297.6	1299.0	1300.5	1300.3	1298.5	1296.6	1294.7	1292.9
165°	1312.2	1313.7	1315.2	1315.2	1313.7	1312.2	1310.7	1309.2
167.5°	1324.4	1325.9	1327.4	1327.2	1325.2	1323.3	1321.4	1319.5
170°	1330.6	1332.1	1333.6	1333.4	1331.5	1329.5	1327.6	1325.6
172.5°	1335.2	1336.7	1338.2	1338.1	1336.1	1334.2	1332.2	1330.3
175°	1340.3	1341.8	1343.3	1343.0	1340.8	1338.7	1336.5	1334.4
177.5°	1340.8	1342.0	1343.3	1343.1	1341.6	1340.0	1338.5	1336.9
180°	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2	1339.2

(END OF REPORT)