

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331548-927

Luminaire Tested: **S122DIW-S675D1240U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331548-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S675D1240U927-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1240 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5548.2 lumens
Efficiency: N/A
Efficacy: 90.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331548-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

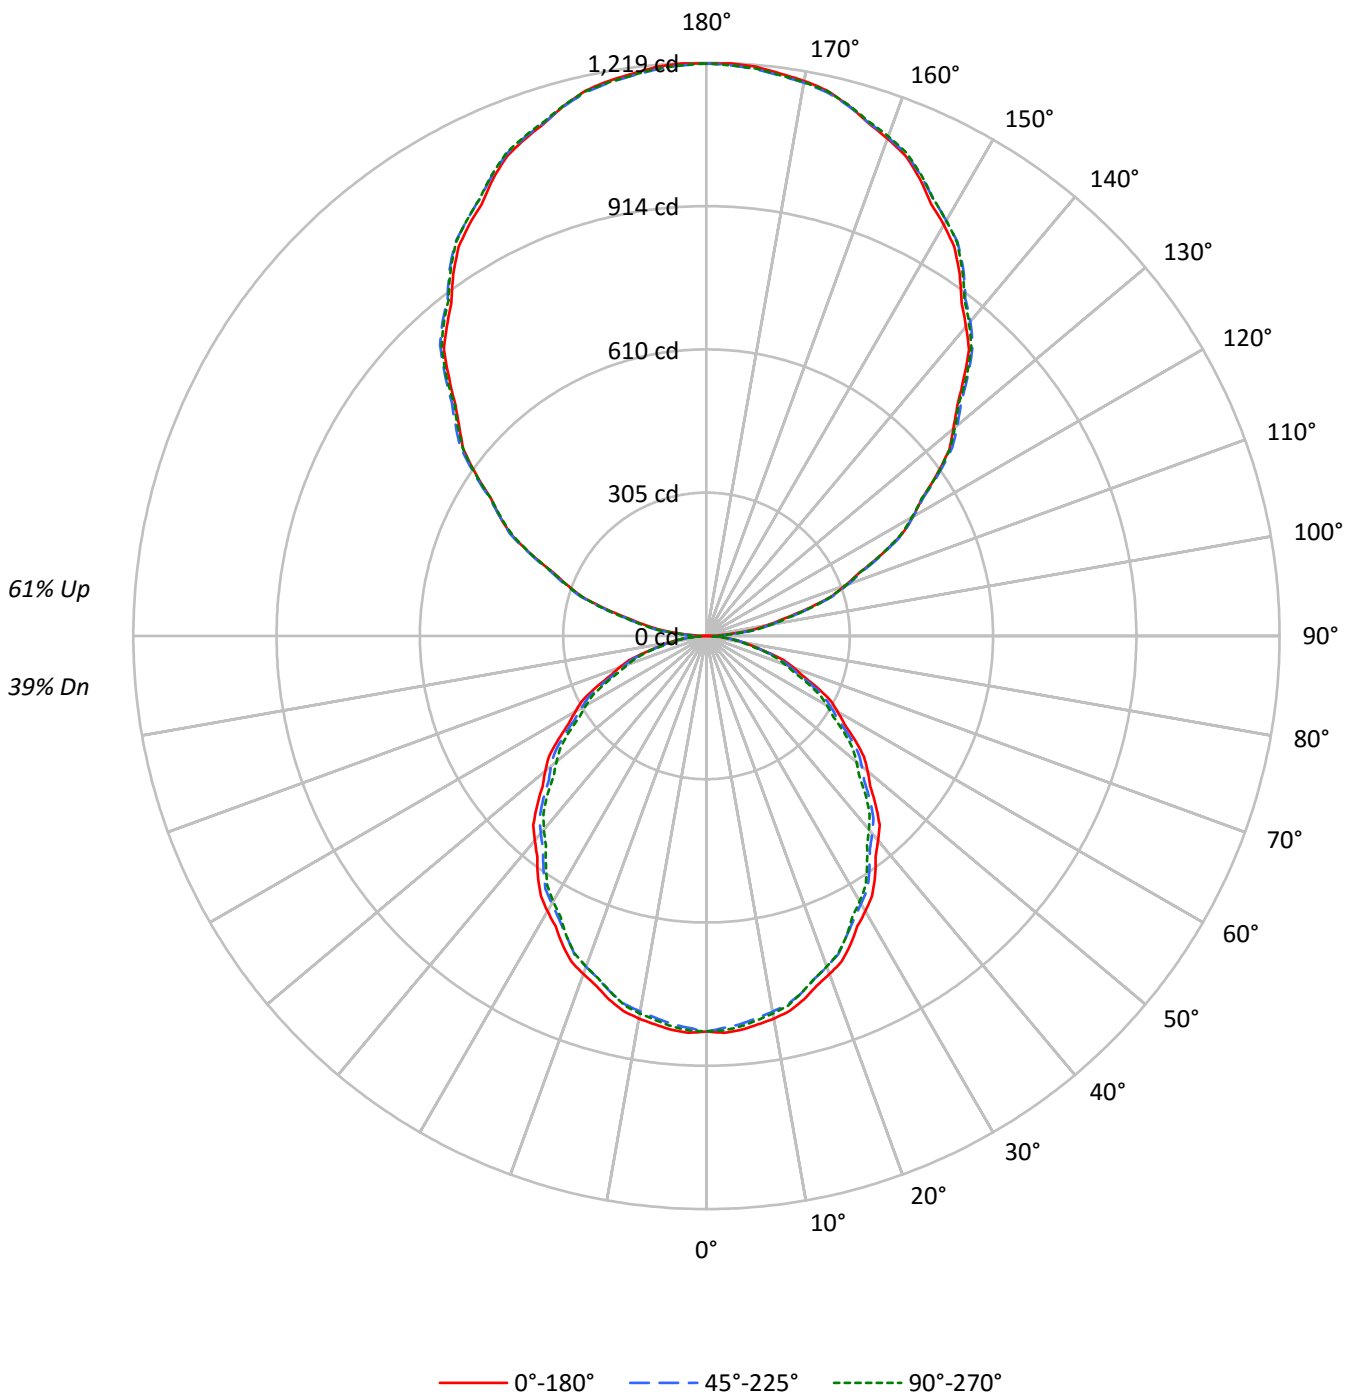



TEST NUMBER: P331548-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46	39
1	95	91	87	84	86	83	80	77	67	65	63	53	52	50	40	39	39	33
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32	27
3	79	70	63	57	72	64	57	52	52	48	44	41	38	36	31	29	28	23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24	20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21	17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16	13
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	17	14	12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11
10	45	33	26	22	41	31	25	20	26	21	17	21	17	15	16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13580	13580	13580
5°	13632	13434	13514
10°	13550	13298	13365
15°	13382	13125	13112
20°	13144	12866	12854
25°	12909	12549	12549
30°	12603	12258	12152
35°	12321	11907	11732
40°	11965	11556	11335
45°	11615	11209	10930
50°	11233	10846	10462
55°	10835	10427	10038
60°	10395	9923	9558
65°	9918	9425	8993
70°	9314	8818	8398
75°	8478	8122	7923
80°	7522	7290	6918
85°	6150	5835	5243



TEST NUMBER: P331548-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.1	1.4
10°-20°	222.5	4.0
20°-30°	327.1	5.9
30°-40°	379.9	6.8
40°-50°	379.5	6.8
50°-60°	331.0	6.0
60°-70°	244.7	4.4
70°-80°	138.6	2.5
80°-90°	42.1	0.8
90°-100°	77.1	1.4
100°-110°	239.6	4.3
110°-120°	409.5	7.4
120°-130°	538.5	9.7
130°-140°	604.4	10.9
140°-150°	592.6	10.7
150°-160°	497.0	9.0
160°-170°	329.7	5.9
170°-180°	115.2	2.1
0°-30°	628.7	11.3
0°-40°	1008.6	18.2
0°-60°	1719.1	31.0
0°-90°	2144.6	38.7
90°-120°	726.2	13.1
90°-150°	2461.6	44.4
90°-180°	3404.0	61.4
0°-180°	5548.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	841	841	841	841	841	
5°	841	838	829	835	834	80
15°	801	795	785	788	784	225
25°	725	718	704	706	704	333
35°	625	617	604	599	595	390
45°	509	503	491	482	479	392
55°	385	380	370	361	357	344
65°	260	254	247	240	235	257
75°	136	134	130	126	127	145
85°	33	32	32	29	28	38
90°	1	14	36	34	35	4
95°	53	63	66	66	64	61
105°	221	224	226	228	228	233
115°	411	417	415	414	411	406
125°	598	606	604	601	600	534
135°	774	784	787	786	783	597
145°	939	946	952	953	949	586
155°	1073	1076	1080	1084	1082	494
165°	1168	1167	1167	1173	1169	329
175°	1215	1212	1210	1216	1211	115
180°	1217	1217	1217	1217	1217	



TEST NUMBER: P331548-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1
2.5°	844.9	844.2	843.5	842.8	842.1	840.9	839.3	837.7	836.1	834.6	836.0
5°	841.1	840.3	839.6	838.9	838.2	836.9	834.9	832.9	830.9	828.9	830.4
7.5°	833.6	832.5	831.4	830.3	829.2	827.6	825.6	823.6	821.6	819.5	820.9
10°	826.5	825.2	823.9	822.7	821.5	819.8	817.6	815.5	813.3	811.1	812.5
12.5°	816.8	815.7	814.5	813.4	812.3	810.7	808.5	806.4	804.2	802.1	803.1
15°	800.6	799.5	798.4	797.4	796.3	794.6	792.3	789.9	787.6	785.2	786.0
17.5°	779.9	778.8	777.8	776.7	775.6	773.9	771.5	769.1	766.8	764.4	765.2
20°	765.0	764.0	762.9	761.8	760.7	758.9	756.4	753.9	751.4	748.8	749.4
22.5°	750.1	748.6	747.1	745.6	744.1	742.2	739.8	737.4	735.1	732.7	732.8
25°	724.6	723.2	721.8	720.3	718.8	716.6	713.5	710.5	707.4	704.4	704.7
27.5°	695.5	694.2	692.9	691.6	690.3	688.5	686.0	683.7	681.2	678.8	678.3
30°	676.0	674.6	673.2	671.8	670.3	668.3	665.6	662.9	660.2	657.5	657.0
32.5°	655.4	654.2	653.1	651.9	650.8	648.8	645.9	643.1	640.2	637.4	636.4
35°	625.1	623.4	621.5	619.7	617.9	615.6	612.8	609.8	607.0	604.1	603.0
37.5°	591.0	589.4	587.8	586.2	584.7	582.4	579.6	576.7	573.9	570.9	569.6
40°	567.7	566.3	564.8	563.4	562.0	559.8	556.9	554.1	551.2	548.3	546.7
42.5°	545.1	543.6	542.2	540.7	539.3	537.2	534.2	531.4	528.5	525.7	523.9
45°	508.7	507.4	506.1	504.9	503.7	501.7	499.0	496.3	493.6	490.9	488.9
47.5°	472.5	471.3	470.1	468.9	467.7	465.7	462.9	460.1	457.3	454.5	452.4
50°	447.2	446.3	445.4	444.5	443.6	441.9	439.4	436.9	434.4	431.8	429.4
52.5°	422.6	421.4	420.3	419.1	417.9	416.1	413.8	411.4	409.0	406.6	404.6
55°	384.9	383.9	382.8	381.7	380.6	379.0	376.8	374.7	372.6	370.4	368.2
57.5°	347.1	346.3	345.4	344.5	343.6	342.1	339.7	337.3	334.9	332.6	330.4
60°	321.9	321.2	320.4	319.7	319.0	317.3	314.9	312.4	309.8	307.3	305.3
62.5°	297.3	296.1	295.0	293.8	292.7	291.1	289.2	287.2	285.3	283.4	281.5
65°	259.6	258.5	257.5	256.4	255.2	253.8	252.1	250.3	248.4	246.7	245.0
67.5°	221.3	220.4	219.5	218.6	217.8	216.6	214.9	213.3	211.8	210.1	208.8
70°	197.3	196.6	195.9	195.2	194.5	193.3	191.6	190.0	188.5	186.8	185.5
72.5°	172.8	172.0	171.3	170.6	169.8	169.0	167.9	166.9	165.9	164.8	163.6
75°	135.9	135.5	135.1	134.8	134.4	133.8	132.9	132.0	131.1	130.2	129.1
77.5°	102.9	102.3	101.6	101.0	100.4	100.0	99.6	99.2	98.9	98.5	98.0
80°	80.9	80.7	80.5	80.3	80.2	79.9	79.5	79.1	78.8	78.4	77.9
82.5°	60.2	60.1	60.1	60.0	60.0	59.9	59.7	59.5	59.3	59.0	58.4
85°	33.2	33.0	32.8	32.6	32.4	32.2	32.1	31.9	31.7	31.5	31.0
87.5°	11.9	12.1	12.4	12.6	12.9	13.4	14.1	14.8	15.5	16.2	15.8
90°	1.0	3.8	6.5	9.3	12.0	15.8	20.9	25.9	30.9	36.0	35.5
92.5°	18.3	20.3	22.3	24.3	26.3	27.9	29.1	30.3	31.4	32.6	32.7
95°	53.4	55.7	58.0	60.3	62.6	63.9	64.4	64.8	65.3	65.8	65.8
97.5°	97.6	99.6	101.6	103.6	105.6	107.0	107.9	108.8	109.6	110.5	110.5
100°	130.5	132.3	134.1	135.9	137.8	139.0	139.7	140.4	141.1	141.7	141.7
102.5°	164.9	166.4	167.9	169.4	170.8	172.0	172.9	173.7	174.6	175.5	175.6
105°	220.9	221.5	222.2	222.9	223.6	224.2	224.6	225.1	225.5	226.0	226.4
107.5°	277.1	278.1	279.2	280.1	281.1	281.6	281.6	281.6	281.6	281.6	281.9
110°	313.3	314.7	316.0	317.4	318.8	319.5	319.5	319.5	319.5	319.5	319.5



TEST NUMBER: P331548-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	352.8	354.1	355.5	356.9	358.2	358.8	358.6	358.5	358.2	358.1	357.5
115°	410.9	412.3	413.6	414.9	416.4	416.8	416.4	415.9	415.4	414.9	414.8
117.5°	468.8	470.6	472.5	474.3	476.1	476.4	475.1	473.8	472.5	471.3	470.7
120°	507.4	509.2	511.1	512.9	514.8	514.8	512.9	511.1	509.2	507.4	507.4
122.5°	542.7	544.9	547.2	549.3	551.5	552.0	550.7	549.5	548.1	546.8	546.3
125°	597.8	599.8	601.9	604.0	606.0	606.7	606.0	605.4	604.7	604.0	603.3
127.5°	651.4	654.0	656.6	659.3	661.9	662.7	661.9	661.1	660.3	659.4	658.6
130°	685.2	688.1	691.1	694.0	697.0	698.2	697.8	697.4	696.9	696.4	695.9
132.5°	722.9	725.3	727.8	730.2	732.6	733.9	734.0	734.0	734.1	734.2	733.2
135°	773.5	775.9	778.5	781.0	783.5	785.0	785.4	785.9	786.4	786.8	786.6
137.5°	826.6	828.7	830.8	832.8	834.9	836.2	836.8	837.4	838.0	838.6	838.4
140°	858.7	860.8	862.8	864.9	867.0	868.5	869.7	870.8	872.0	873.1	873.1
142.5°	891.6	893.7	895.7	897.8	899.8	901.2	902.0	902.8	903.6	904.4	904.5
145°	938.8	940.5	942.1	943.6	945.2	946.7	948.1	949.4	950.9	952.2	952.4
147.5°	981.0	982.9	984.8	986.7	988.6	990.1	990.9	991.9	992.8	993.7	994.2
150°	1009.7	1011.1	1012.5	1013.8	1015.2	1016.4	1017.2	1018.2	1019.1	1020.0	1020.6
152.5°	1035.2	1036.6	1037.9	1039.3	1040.7	1041.9	1043.0	1044.1	1045.2	1046.3	1047.2
155°	1073.4	1074.1	1074.8	1075.5	1076.2	1076.8	1077.5	1078.2	1078.9	1079.6	1080.7
157.5°	1106.0	1106.5	1107.0	1107.5	1107.9	1108.3	1108.7	1109.1	1109.5	1110.0	1111.5
160°	1125.8	1126.2	1126.7	1127.2	1127.6	1128.0	1128.1	1128.4	1128.6	1128.9	1130.2
162.5°	1143.8	1144.0	1144.1	1144.1	1144.2	1144.4	1144.6	1144.9	1145.1	1145.3	1146.8
165°	1167.9	1167.7	1167.4	1167.2	1167.0	1166.9	1166.9	1166.9	1166.9	1166.9	1168.5
167.5°	1188.0	1187.3	1186.7	1186.0	1185.3	1184.9	1184.9	1184.9	1184.8	1184.7	1186.4
170°	1198.7	1198.0	1197.4	1196.7	1196.0	1195.6	1195.3	1195.1	1194.8	1194.6	1196.2
172.5°	1206.1	1205.5	1204.8	1204.0	1203.4	1202.9	1202.7	1202.5	1202.2	1202.0	1203.6
175°	1215.1	1214.5	1213.8	1213.1	1212.4	1211.9	1211.4	1210.9	1210.5	1210.0	1211.6
177.5°	1218.9	1218.3	1217.7	1217.2	1216.6	1216.2	1215.8	1215.4	1215.1	1214.7	1215.8
180°	1217.2	1217.2	1217.2	1217.2	1217.2	1217.2	1217.2	1217.2	1217.2	1217.2	1217.2



TEST NUMBER: P331548-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1
2.5°	837.4	838.9	840.3	840.9	840.6	840.3	840.0	839.8
5°	831.8	833.2	834.6	835.2	834.9	834.5	834.2	833.8
7.5°	822.4	823.9	825.3	825.8	825.4	825.1	824.7	824.3
10°	814.0	815.5	816.9	817.3	816.8	816.3	815.7	815.2
12.5°	804.1	805.1	806.1	806.4	806.0	805.6	805.3	804.9
15°	786.7	787.4	788.1	788.1	787.1	786.2	785.4	784.4
17.5°	766.0	766.8	767.7	767.7	766.8	766.0	765.1	764.2
20°	750.0	750.5	751.0	750.9	750.2	749.5	748.8	748.1
22.5°	732.9	733.0	733.1	732.9	732.5	732.1	731.7	731.3
25°	705.1	705.4	705.8	705.8	705.4	705.1	704.7	704.4
27.5°	677.7	677.2	676.7	676.0	675.1	674.2	673.4	672.5
30°	656.4	655.8	655.3	654.7	653.9	653.2	652.5	651.8
32.5°	635.5	634.5	633.5	632.7	632.0	631.3	630.5	629.8
35°	602.0	600.9	599.8	598.8	597.9	597.0	596.1	595.2
37.5°	568.3	567.0	565.6	564.5	563.6	562.8	562.0	561.1
40°	545.1	543.4	541.9	540.7	540.0	539.2	538.5	537.8
42.5°	522.1	520.4	518.6	517.2	516.2	515.2	514.2	513.2
45°	487.0	485.0	483.0	481.6	480.9	480.2	479.5	478.7
47.5°	450.4	448.2	446.2	444.6	443.5	442.5	441.5	440.5
50°	426.8	424.3	421.8	420.1	419.1	418.3	417.4	416.5
52.5°	402.4	400.4	398.3	396.6	395.5	394.3	393.1	391.9
55°	366.1	363.9	361.8	360.2	359.3	358.5	357.5	356.6
57.5°	328.3	326.1	324.1	322.7	321.9	321.3	320.6	319.9
60°	303.3	301.3	299.4	298.2	297.6	297.1	296.5	296.0
62.5°	279.7	277.9	276.1	274.8	274.1	273.4	272.7	272.0
65°	243.4	241.8	240.2	238.9	238.1	237.1	236.2	235.4
67.5°	207.6	206.4	205.1	204.1	203.4	202.6	201.9	201.2
70°	184.3	183.1	181.8	180.8	180.1	179.4	178.6	177.9
72.5°	162.3	161.1	159.8	158.8	158.3	157.7	157.2	156.5
75°	128.0	127.0	125.9	125.6	125.9	126.3	126.6	127.0
77.5°	97.4	96.9	96.3	95.9	95.3	94.8	94.3	93.8
80°	77.4	76.8	76.3	75.8	75.5	75.1	74.8	74.4
82.5°	57.7	57.0	56.3	55.9	55.8	55.8	55.7	55.6
85°	30.5	29.9	29.4	29.0	28.8	28.7	28.5	28.3
87.5°	15.2	14.7	14.2	13.9	13.8	13.6	13.5	13.5
90°	35.0	34.6	34.1	34.0	34.2	34.5	34.7	34.9
92.5°	32.9	33.0	33.0	33.1	33.1	33.2	33.3	33.3
95°	65.8	65.8	65.8	65.5	65.0	64.6	64.2	63.7
97.5°	110.5	110.5	110.5	110.5	110.4	110.4	110.4	110.4
100°	141.7	141.7	141.7	141.6	141.4	141.2	140.9	140.7
102.5°	175.8	176.0	176.2	176.2	175.9	175.7	175.5	175.2
105°	226.9	227.4	227.8	228.1	228.1	228.1	228.1	228.1
107.5°	282.0	282.2	282.4	281.9	280.9	279.9	278.8	277.7
110°	319.5	319.5	319.5	319.1	318.5	317.7	317.0	316.4



TEST NUMBER: P331548-927

CATALOG NUMBER: S122DIW-S675D1240U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	357.0	356.4	355.8	355.4	354.8	354.3	353.9	353.3
115°	414.5	414.3	414.1	413.6	413.0	412.3	411.5	410.9
117.5°	470.2	469.6	469.1	468.5	467.8	467.1	466.4	465.7
120°	507.4	507.4	507.4	507.1	506.4	505.7	505.0	504.4
122.5°	545.8	545.3	544.7	544.2	543.7	543.1	542.6	542.2
125°	602.6	601.9	601.3	600.8	600.6	600.3	600.1	599.8
127.5°	657.8	657.0	656.2	655.4	654.7	653.9	653.2	652.4
130°	695.5	695.1	694.6	694.0	693.0	692.1	691.2	690.2
132.5°	732.2	731.2	730.2	729.4	728.6	727.9	727.1	726.4
135°	786.4	786.2	785.9	785.4	784.7	784.1	783.4	782.7
137.5°	838.2	838.0	837.9	837.3	836.4	835.5	834.6	833.7
140°	873.1	873.1	873.1	872.7	871.7	870.8	869.9	869.0
142.5°	904.7	904.9	905.1	904.7	903.8	902.9	902.0	901.0
145°	952.7	952.9	953.1	952.8	951.9	950.9	950.1	949.1
147.5°	994.7	995.2	995.7	995.5	994.7	993.8	992.9	992.0
150°	1021.4	1022.1	1022.7	1022.7	1022.1	1021.4	1020.6	1020.0
152.5°	1048.1	1048.8	1049.7	1049.7	1048.8	1048.1	1047.2	1046.3
155°	1081.9	1083.0	1084.1	1084.3	1083.7	1083.0	1082.3	1081.6
157.5°	1113.1	1114.6	1116.2	1116.4	1115.3	1114.2	1113.1	1112.0
160°	1131.6	1133.0	1134.3	1134.6	1133.7	1132.7	1131.9	1130.9
162.5°	1148.4	1149.9	1151.5	1151.8	1150.6	1149.5	1148.4	1147.4
165°	1170.1	1171.6	1173.3	1173.5	1172.4	1171.2	1170.1	1168.9
167.5°	1188.0	1189.5	1191.1	1191.4	1190.2	1189.0	1187.8	1186.6
170°	1197.8	1199.4	1201.0	1201.1	1199.8	1198.4	1197.0	1195.6
172.5°	1205.2	1206.8	1208.4	1208.5	1207.1	1205.8	1204.4	1203.0
175°	1213.2	1214.8	1216.4	1216.6	1215.1	1213.8	1212.4	1211.0
177.5°	1217.0	1218.1	1219.1	1219.1	1218.1	1217.0	1215.8	1214.7
180°	1217.2	1217.2	1217.2	1217.2	1217.2	1217.2	1217.2	1217.2

(END OF REPORT)