

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331584-927

Luminaire Tested: **S122DIW-S865D1440U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331584-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S865D1440U927-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1440 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6744.1 lumens
Efficiency: N/A
Efficacy: 88.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331584-927

CATALOG NUMBER: S122DIW-S865D1440U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

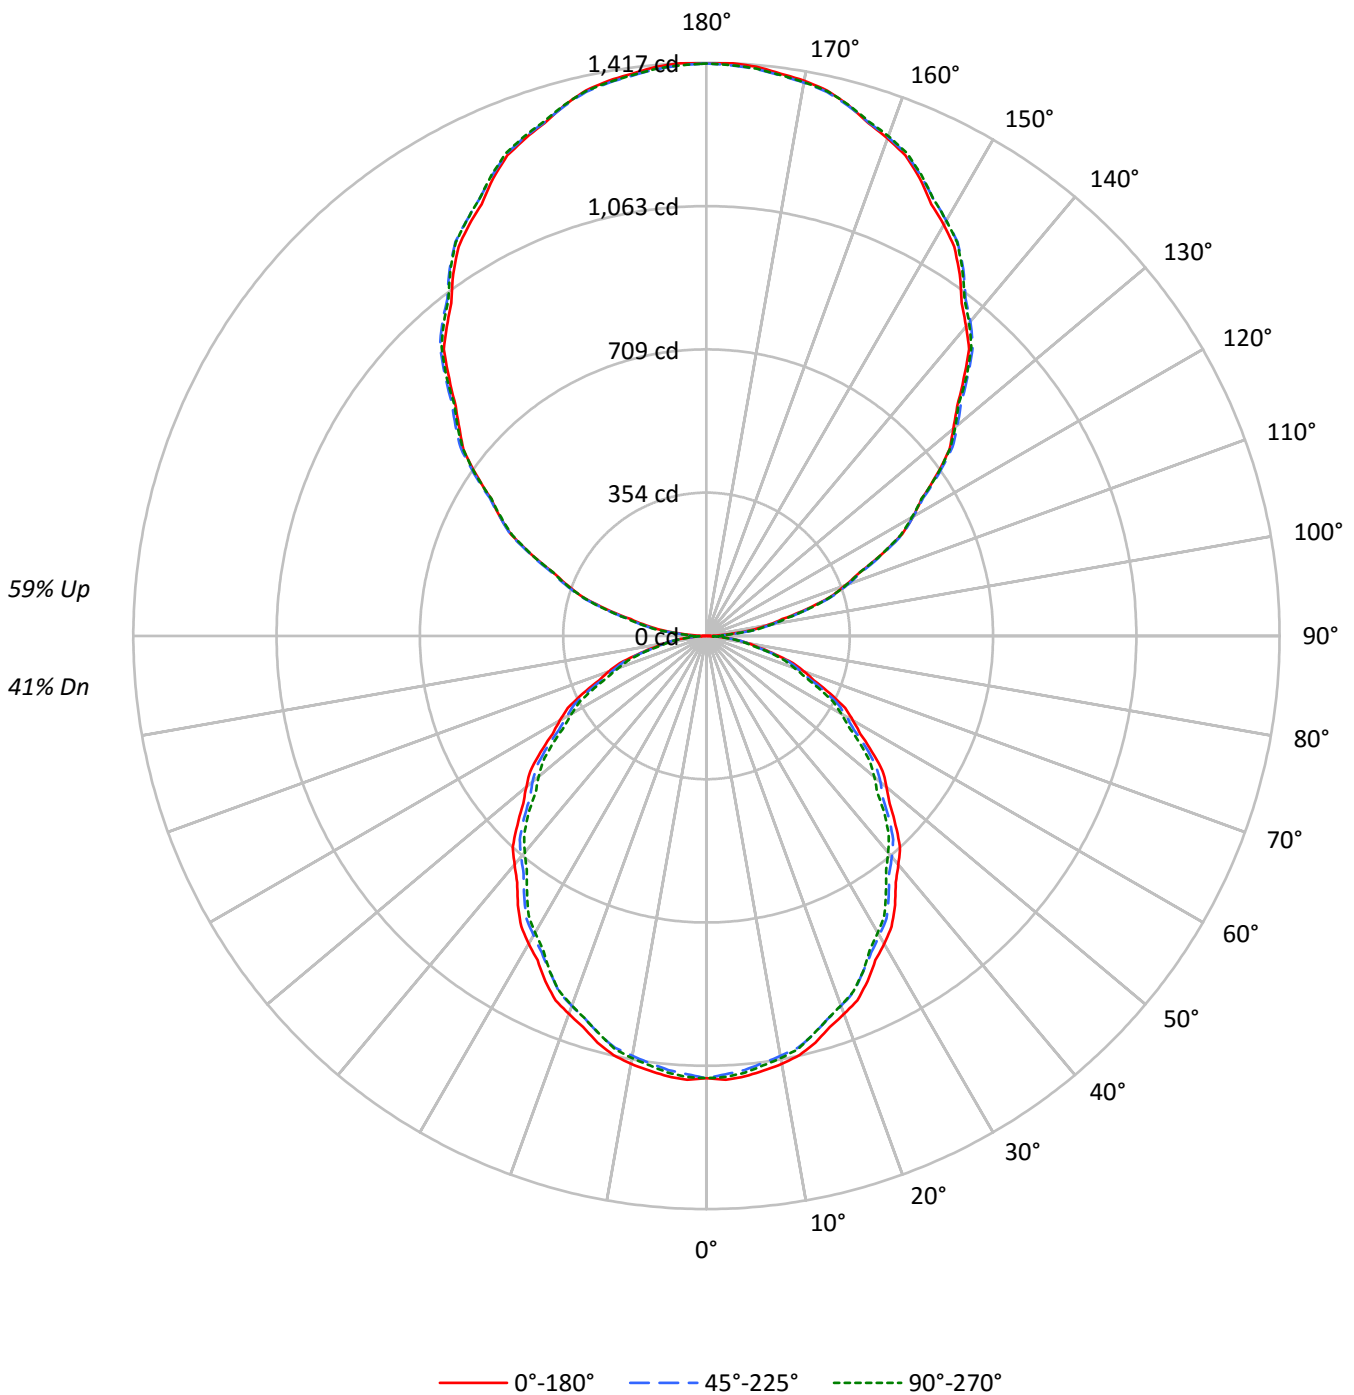



TEST NUMBER: P331584-927

CATALOG NUMBER: S122DIW-S865D1440U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	48	48	48	41
1	96	92	88	84	87	84	80	77	69	66	64	55	54	52	43	42	41	35
2	87	80	74	69	79	73	68	63	60	56	53	48	46	43	37	36	34	29
3	80	70	63	57	72	64	58	53	53	49	45	43	40	37	33	31	29	25
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	30	27	25	21
5	67	55	47	41	61	51	44	38	42	37	33	34	30	27	27	24	22	18
6	61	50	42	36	56	46	38	33	38	33	29	31	27	24	24	21	19	16
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17	14
8	53	40	33	28	48	37	31	26	31	26	22	26	22	19	20	17	15	13
9	49	37	30	25	45	34	27	23	29	23	20	24	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17651	17651	17651
5°	17718	17462	17566
10°	17613	17285	17372
15°	17396	17061	17043
20°	17086	16725	16706
25°	16778	16311	16311
30°	16384	15933	15795
35°	16015	15477	15248
40°	15553	15022	14733
45°	15098	14570	14209
50°	14601	14099	13599
55°	14083	13551	13050
60°	13511	12897	12426
65°	12894	12248	11687
70°	12109	11462	10914
75°	11017	10555	10293
80°	9772	9484	8991
85°	7984	7595	6817



TEST NUMBER: P331584-927

CATALOG NUMBER: S122DIW-S865D1440U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.8	1.5
10°-20°	289.3	4.3
20°-30°	425.2	6.3
30°-40°	493.9	7.3
40°-50°	493.3	7.3
50°-60°	430.2	6.4
60°-70°	318.1	4.7
70°-80°	180.2	2.7
80°-90°	54.1	0.8
90°-100°	89.7	1.3
100°-110°	278.5	4.1
110°-120°	476.1	7.1
120°-130°	626.1	9.3
130°-140°	702.7	10.4
140°-150°	689.0	10.2
150°-160°	577.9	8.6
160°-170°	383.3	5.7
170°-180°	134.0	2.0
0°-30°	817.2	12.1
0°-40°	1311.1	19.4
0°-60°	2234.6	33.1
0°-90°	2787.0	41.3
90°-120°	844.3	12.5
90°-150°	2862.0	42.4
90°-180°	3957.0	58.7
0°-180°	6744.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1093	1093	1093	1093	1093	
5°	1093	1089	1077	1085	1084	104
15°	1041	1034	1021	1024	1020	293
25°	942	933	916	917	916	433
35°	812	802	785	779	774	507
45°	661	653	638	627	622	510
55°	500	494	481	469	464	447
65°	338	331	321	311	306	334
75°	177	174	169	163	165	189
85°	43	42	41	38	37	49
90°	1	16	42	40	41	5
95°	62	74	76	76	74	71
105°	257	260	263	265	265	271
115°	478	484	482	481	478	472
125°	695	705	702	699	697	621
135°	899	912	915	914	910	694
145°	1092	1100	1107	1108	1104	682
155°	1248	1252	1255	1261	1258	574
165°	1358	1357	1357	1364	1359	383
175°	1413	1409	1407	1414	1408	134
180°	1415	1415	1415	1415	1415	



TEST NUMBER: P331584-927

CATALOG NUMBER: S122DIW-S865D1440U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2
2.5°	1098.3	1097.3	1096.4	1095.5	1094.6	1093.1	1091.0	1088.9	1086.9	1084.8	1086.7
5°	1093.2	1092.3	1091.4	1090.4	1089.5	1087.7	1085.2	1082.6	1080.1	1077.4	1079.3
7.5°	1083.5	1082.1	1080.7	1079.2	1077.8	1075.7	1073.1	1070.5	1067.9	1065.2	1067.1
10°	1074.3	1072.7	1071.0	1069.4	1067.8	1065.6	1062.7	1059.9	1057.2	1054.3	1056.2
12.5°	1061.7	1060.3	1058.8	1057.3	1055.9	1053.8	1051.0	1048.1	1045.4	1042.6	1043.9
15°	1040.7	1039.3	1037.8	1036.5	1035.1	1032.8	1029.8	1026.7	1023.7	1020.7	1021.6
17.5°	1013.8	1012.3	1011.0	1009.6	1008.1	1005.9	1002.8	999.7	996.6	993.6	994.7
20°	994.4	993.0	991.7	990.2	988.8	986.5	983.2	979.9	976.7	973.4	974.1
22.5°	975.1	973.1	971.1	969.2	967.3	964.7	961.6	958.5	955.5	952.4	952.5
25°	941.8	940.0	938.1	936.3	934.4	931.4	927.5	923.5	919.6	915.6	916.1
27.5°	904.0	902.4	900.6	899.0	897.3	894.8	891.8	888.6	885.5	882.3	881.7
30°	878.8	876.9	875.0	873.2	871.3	868.6	865.1	861.7	858.1	854.6	853.9
32.5°	851.9	850.4	848.9	847.4	845.9	843.3	839.6	835.9	832.3	828.5	827.3
35°	812.5	810.2	807.9	805.6	803.2	800.2	796.5	792.7	788.9	785.2	783.9
37.5°	768.2	766.1	764.1	762.0	760.0	757.1	753.4	749.6	745.8	742.1	740.4
40°	737.9	736.1	734.2	732.3	730.5	727.6	723.9	720.2	716.4	712.7	710.6
42.5°	708.5	706.6	704.7	702.9	701.0	698.2	694.5	690.8	687.0	683.3	681.0
45°	661.2	659.6	657.9	656.3	654.7	652.0	648.6	645.1	641.6	638.1	635.5
47.5°	614.1	612.6	611.0	609.5	607.9	605.3	601.7	598.0	594.4	590.7	588.0
50°	581.3	580.1	579.0	577.8	576.6	574.4	571.2	567.8	564.6	561.3	558.1
52.5°	549.4	547.8	546.3	544.7	543.2	540.9	537.8	534.7	531.6	528.5	525.9
55°	500.3	499.0	497.6	496.1	494.7	492.7	489.9	487.0	484.3	481.4	478.6
57.5°	451.1	450.0	448.9	447.8	446.7	444.6	441.5	438.4	435.3	432.2	429.5
60°	418.4	417.4	416.5	415.6	414.6	412.6	409.2	406.0	402.7	399.4	396.9
62.5°	386.4	384.9	383.4	381.9	380.4	378.4	375.9	373.4	370.8	368.4	366.0
65°	337.5	336.0	334.6	333.2	331.8	329.9	327.6	325.3	323.0	320.6	318.5
67.5°	287.6	286.5	285.3	284.2	283.1	281.5	279.4	277.3	275.2	273.1	271.5
70°	256.5	255.6	254.6	253.7	252.8	251.2	249.1	247.0	244.9	242.8	241.2
72.5°	224.5	223.6	222.7	221.7	220.8	219.7	218.3	217.0	215.6	214.2	212.6
75°	176.6	176.1	175.6	175.2	174.8	173.9	172.8	171.6	170.4	169.2	167.9
77.5°	133.7	132.9	132.1	131.3	130.6	129.9	129.4	129.0	128.5	128.0	127.3
80°	105.1	104.9	104.6	104.4	104.2	103.9	103.4	102.9	102.4	102.0	101.2
82.5°	78.2	78.2	78.1	78.0	78.0	77.9	77.6	77.3	77.0	76.8	75.8
85°	43.1	42.9	42.6	42.4	42.1	41.9	41.7	41.4	41.2	41.0	40.3
87.5°	15.4	15.6	15.9	16.2	16.4	17.0	17.7	18.5	19.3	20.1	19.5
90°	1.2	4.4	7.5	10.8	13.9	18.5	24.3	30.1	36.0	41.8	41.3
92.5°	21.2	23.6	25.9	28.3	30.6	32.5	33.8	35.3	36.6	37.9	38.1
95°	62.1	64.7	67.4	70.0	72.7	74.3	74.9	75.3	75.9	76.4	76.4
97.5°	113.4	115.8	118.1	120.5	122.8	124.5	125.5	126.5	127.5	128.5	128.5
100°	151.7	153.8	155.9	158.0	160.2	161.6	162.4	163.2	164.0	164.8	164.8
102.5°	191.8	193.5	195.2	196.9	198.6	199.9	201.0	201.9	203.0	204.0	204.2
105°	256.7	257.5	258.3	259.1	259.9	260.6	261.2	261.7	262.2	262.8	263.2
107.5°	322.2	323.4	324.6	325.7	326.9	327.5	327.5	327.5	327.5	327.5	327.6
110°	364.2	365.8	367.4	369.0	370.6	371.5	371.5	371.5	371.5	371.5	371.5



TEST NUMBER: P331584-927

CATALOG NUMBER: S122DIW-S865D1440U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	410.1	411.7	413.3	414.9	416.5	417.2	416.9	416.8	416.5	416.3	415.7
115°	477.7	479.3	480.9	482.5	484.1	484.6	484.1	483.5	483.0	482.5	482.2
117.5°	545.1	547.2	549.3	551.4	553.6	553.9	552.4	550.9	549.4	548.0	547.3
120°	589.9	592.1	594.2	596.4	598.5	598.5	596.4	594.2	592.1	589.9	589.9
122.5°	631.1	633.6	636.1	638.7	641.3	641.7	640.3	638.8	637.3	635.8	635.2
125°	695.1	697.4	699.8	702.2	704.6	705.4	704.6	703.9	703.1	702.2	701.4
127.5°	757.4	760.4	763.4	766.5	769.5	770.6	769.6	768.7	767.7	766.8	765.7
130°	796.5	800.0	803.5	806.9	810.4	811.8	811.3	810.8	810.2	809.7	809.2
132.5°	840.5	843.4	846.1	849.0	851.8	853.3	853.3	853.4	853.6	853.7	852.5
135°	899.3	902.2	905.1	908.0	910.9	912.7	913.2	913.8	914.3	914.8	914.6
137.5°	961.2	963.5	965.9	968.3	970.7	972.2	973.0	973.6	974.3	975.0	974.8
140°	998.4	1000.8	1003.2	1005.6	1008.0	1009.8	1011.1	1012.5	1013.8	1015.1	1015.1
142.5°	1036.6	1039.0	1041.4	1043.8	1046.2	1047.8	1048.7	1049.6	1050.5	1051.5	1051.6
145°	1091.5	1093.4	1095.3	1097.1	1099.0	1100.7	1102.3	1103.9	1105.5	1107.1	1107.3
147.5°	1140.5	1142.7	1144.9	1147.2	1149.5	1151.1	1152.1	1153.2	1154.3	1155.3	1156.0
150°	1173.9	1175.5	1177.2	1178.8	1180.4	1181.6	1182.7	1183.8	1184.9	1185.9	1186.7
152.5°	1203.6	1205.1	1206.7	1208.3	1210.0	1211.4	1212.7	1213.9	1215.2	1216.5	1217.5
155°	1248.0	1248.8	1249.6	1250.4	1251.2	1252.0	1252.8	1253.5	1254.3	1255.1	1256.5
157.5°	1285.9	1286.5	1287.1	1287.6	1288.1	1288.6	1289.1	1289.6	1290.1	1290.5	1292.3
160°	1308.9	1309.5	1310.0	1310.5	1311.1	1311.5	1311.7	1311.9	1312.2	1312.5	1314.1
162.5°	1329.9	1330.1	1330.2	1330.2	1330.4	1330.5	1330.8	1331.1	1331.3	1331.6	1333.4
165°	1357.9	1357.6	1357.3	1357.1	1356.8	1356.7	1356.7	1356.7	1356.7	1356.7	1358.5
167.5°	1381.2	1380.5	1379.7	1378.9	1378.1	1377.7	1377.6	1377.6	1377.5	1377.4	1379.3
170°	1393.7	1392.9	1392.1	1391.3	1390.5	1390.0	1389.7	1389.5	1389.2	1388.9	1390.8
172.5°	1402.3	1401.5	1400.7	1399.9	1399.2	1398.6	1398.4	1398.0	1397.8	1397.5	1399.4
175°	1412.8	1412.0	1411.2	1410.4	1409.6	1409.0	1408.4	1407.9	1407.4	1406.8	1408.7
177.5°	1417.1	1416.5	1415.9	1415.2	1414.6	1414.0	1413.6	1413.2	1412.8	1412.3	1413.6
180°	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2



TEST NUMBER: P331584-927

CATALOG NUMBER: S122DIW-S865D1440U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2
2.5°	1088.5	1090.4	1092.3	1093.1	1092.7	1092.3	1091.9	1091.5
5°	1081.2	1083.1	1085.0	1085.6	1085.2	1084.7	1084.3	1083.8
7.5°	1069.0	1070.9	1072.8	1073.4	1072.9	1072.4	1071.9	1071.3
10°	1058.0	1059.9	1061.8	1062.4	1061.7	1061.0	1060.3	1059.6
12.5°	1045.2	1046.5	1047.8	1048.2	1047.7	1047.2	1046.6	1046.2
15°	1022.5	1023.5	1024.5	1024.3	1023.2	1022.0	1020.8	1019.6
17.5°	995.7	996.8	997.9	997.8	996.7	995.6	994.5	993.4
20°	974.8	975.5	976.2	976.0	975.2	974.2	973.3	972.3
22.5°	952.7	952.8	952.9	952.8	952.1	951.6	951.0	950.5
25°	916.6	917.0	917.4	917.4	917.0	916.6	916.1	915.6
27.5°	881.0	880.3	879.6	878.7	877.5	876.4	875.3	874.2
30°	853.2	852.5	851.8	851.0	850.1	849.1	848.2	847.2
32.5°	826.0	824.7	823.5	822.4	821.5	820.5	819.6	818.6
35°	782.4	781.0	779.7	778.3	777.2	776.0	774.8	773.6
37.5°	738.7	737.0	735.2	733.8	732.7	731.6	730.5	729.3
40°	708.5	706.4	704.3	702.7	701.9	700.9	700.0	699.0
42.5°	678.7	676.4	674.1	672.3	671.0	669.7	668.4	667.1
45°	633.0	630.3	627.8	626.1	625.1	624.2	623.2	622.3
47.5°	585.3	582.7	580.0	577.9	576.6	575.2	573.9	572.5
50°	554.8	551.5	548.3	546.1	544.9	543.7	542.6	541.4
52.5°	523.1	520.4	517.7	515.6	514.0	512.5	511.0	509.4
55°	475.9	473.0	470.2	468.3	467.1	465.9	464.8	463.6
57.5°	426.7	424.0	421.2	419.4	418.5	417.6	416.8	415.8
60°	394.3	391.7	389.2	387.5	386.8	386.1	385.4	384.8
62.5°	363.5	361.2	358.8	357.2	356.2	355.4	354.5	353.6
65°	316.4	314.3	312.2	310.5	309.4	308.2	307.0	305.9
67.5°	269.8	268.2	266.6	265.3	264.4	263.4	262.4	261.5
70°	239.6	237.9	236.3	235.0	234.1	233.1	232.2	231.2
72.5°	211.0	209.3	207.7	206.5	205.7	205.0	204.2	203.5
75°	166.4	165.0	163.7	163.2	163.7	164.1	164.5	165.0
77.5°	126.7	126.0	125.2	124.5	123.9	123.3	122.6	121.9
80°	100.5	99.9	99.2	98.5	98.1	97.7	97.2	96.7
82.5°	74.9	74.1	73.2	72.7	72.6	72.5	72.4	72.3
85°	39.6	38.9	38.2	37.7	37.5	37.2	37.0	36.8
87.5°	18.8	18.1	17.4	17.0	17.0	16.8	16.6	16.6
90°	40.7	40.2	39.7	39.5	39.8	40.1	40.3	40.6
92.5°	38.2	38.3	38.4	38.5	38.5	38.6	38.7	38.7
95°	76.4	76.4	76.4	76.1	75.7	75.1	74.5	74.1
97.5°	128.5	128.5	128.5	128.5	128.4	128.3	128.3	128.3
100°	164.8	164.8	164.8	164.7	164.4	164.1	163.9	163.6
102.5°	204.4	204.6	204.9	204.8	204.5	204.3	204.0	203.7
105°	263.8	264.4	264.8	265.1	265.1	265.1	265.1	265.1
107.5°	327.9	328.1	328.3	327.8	326.6	325.3	324.2	322.9
110°	371.5	371.5	371.5	371.0	370.2	369.4	368.6	367.8



TEST NUMBER: P331584-927

CATALOG NUMBER: S122DIW-S865D1440U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	415.0	414.4	413.8	413.1	412.6	412.0	411.4	410.8
115°	482.0	481.6	481.4	480.9	480.1	479.3	478.5	477.7
117.5°	546.7	546.1	545.4	544.6	543.8	543.0	542.2	541.5
120°	589.9	589.9	589.9	589.5	588.7	588.0	587.2	586.4
122.5°	634.5	633.9	633.3	632.6	632.1	631.5	630.9	630.3
125°	700.6	699.8	699.0	698.5	698.2	698.0	697.8	697.4
127.5°	764.8	763.8	762.9	762.0	761.1	760.3	759.5	758.6
130°	808.7	808.1	807.6	806.8	805.7	804.7	803.6	802.6
132.5°	851.4	850.2	849.0	848.0	847.2	846.3	845.4	844.5
135°	914.3	914.0	913.8	913.2	912.4	911.6	910.9	910.1
137.5°	974.5	974.4	974.1	973.5	972.5	971.4	970.3	969.2
140°	1015.1	1015.1	1015.1	1014.6	1013.5	1012.5	1011.4	1010.3
142.5°	1051.9	1052.1	1052.3	1051.9	1050.8	1049.7	1048.7	1047.6
145°	1107.6	1107.9	1108.1	1107.7	1106.7	1105.6	1104.5	1103.5
147.5°	1156.5	1157.1	1157.7	1157.5	1156.4	1155.4	1154.4	1153.4
150°	1187.5	1188.3	1189.1	1189.1	1188.3	1187.5	1186.7	1185.9
152.5°	1218.5	1219.5	1220.5	1220.5	1219.5	1218.5	1217.5	1216.5
155°	1257.8	1259.2	1260.4	1260.8	1260.0	1259.2	1258.4	1257.6
157.5°	1294.1	1295.9	1297.8	1298.0	1296.7	1295.5	1294.2	1292.9
160°	1315.7	1317.2	1318.8	1319.1	1318.0	1317.0	1316.0	1314.9
162.5°	1335.2	1337.0	1338.8	1339.1	1337.8	1336.6	1335.3	1334.0
165°	1360.4	1362.2	1364.1	1364.4	1363.0	1361.8	1360.4	1359.1
167.5°	1381.2	1383.1	1384.9	1385.1	1383.8	1382.4	1381.0	1379.6
170°	1392.7	1394.5	1396.4	1396.5	1394.9	1393.3	1391.7	1390.1
172.5°	1401.2	1403.1	1404.9	1405.1	1403.5	1401.9	1400.3	1398.8
175°	1410.6	1412.4	1414.3	1414.4	1412.8	1411.2	1409.6	1408.0
177.5°	1414.9	1416.2	1417.5	1417.5	1416.2	1414.9	1413.6	1412.3
180°	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2

(END OF REPORT)