

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331566-927

Luminaire Tested: **S122DIW-S865D710U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331566-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S865D710U927-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 710 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4731.9 lumens
Efficiency: N/A
Efficacy: 88.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 53.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331566-927

CATALOG NUMBER: S122DIW-S865D710U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

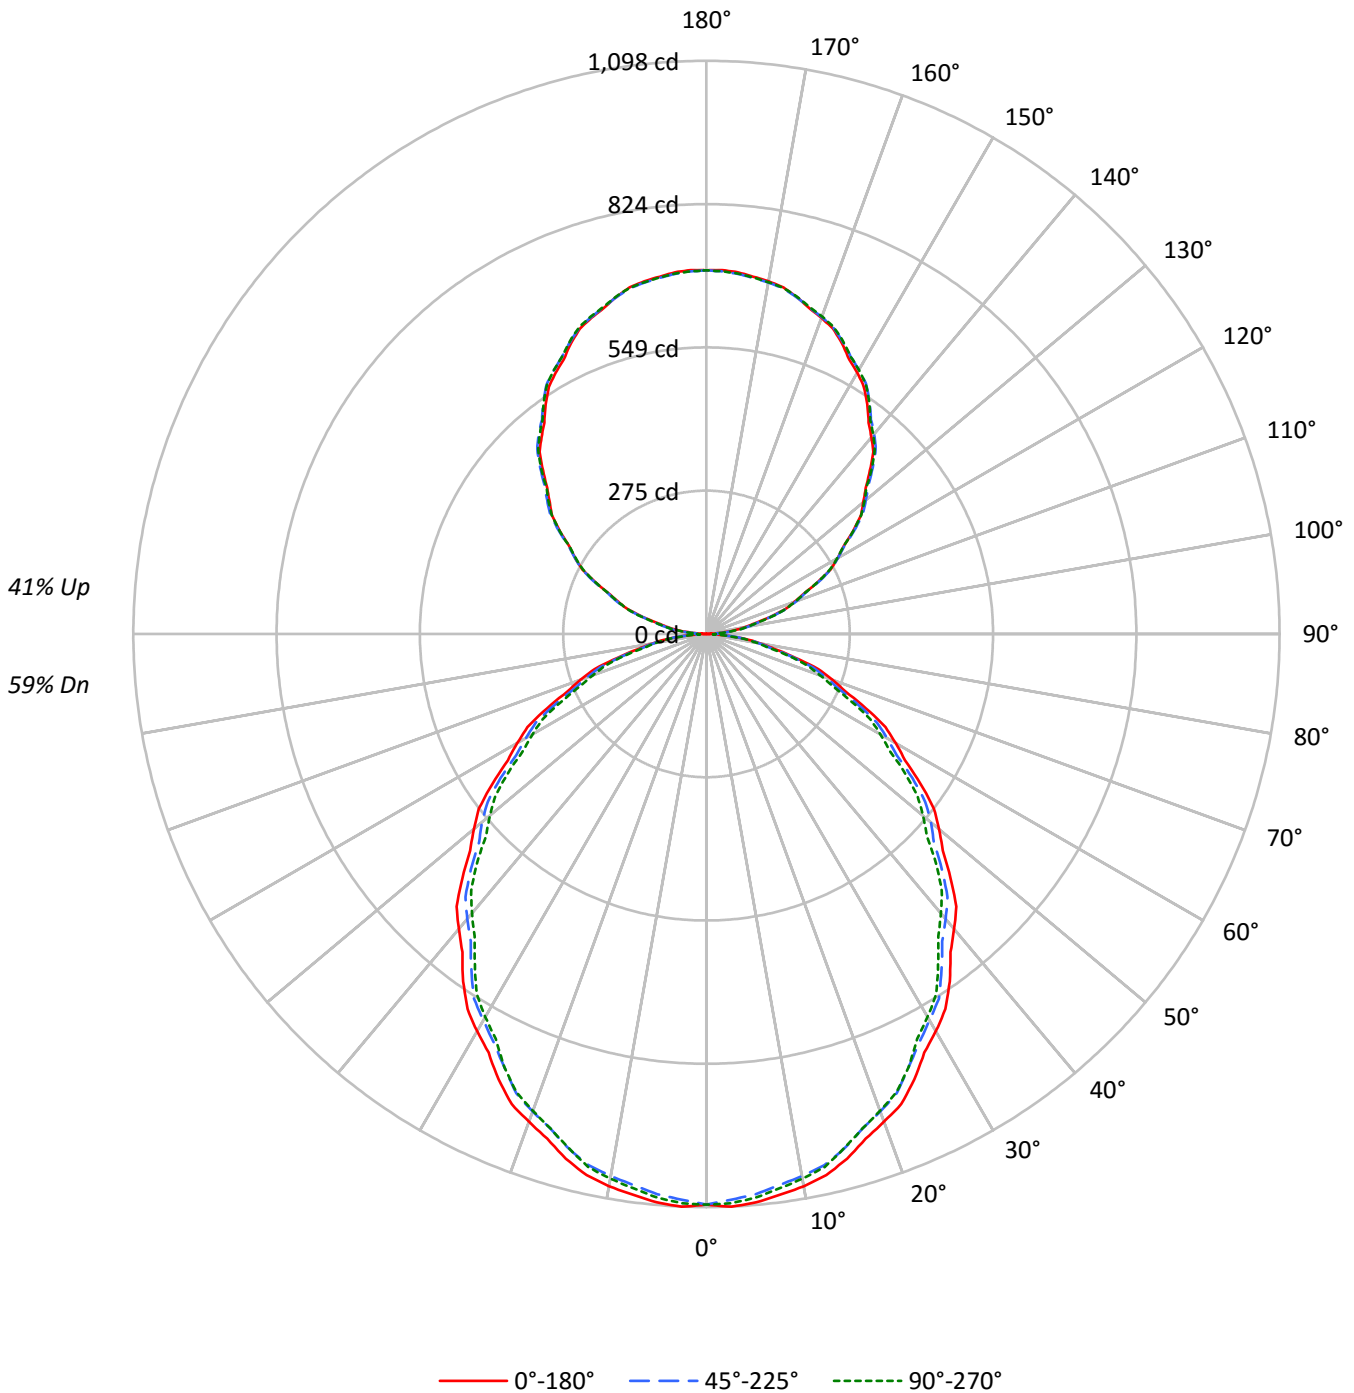



TEST NUMBER: P331566-927

CATALOG NUMBER: S122DIW-S865D710U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59
1	100	95	91	88	93	89	86	83	77	75	73	67	65	63	57	55	54	50
2	91	83	77	72	84	78	72	68	68	64	60	59	55	53	50	48	46	41
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	44	41	39	35
4	76	65	57	51	70	61	54	48	53	48	43	46	42	38	40	36	34	30
5	70	58	50	43	65	54	47	41	48	42	37	41	37	33	36	32	29	26
6	64	52	44	38	60	49	41	36	43	37	33	38	33	29	32	29	26	23
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	30	26	23	20
8	55	43	35	29	51	40	33	28	36	30	26	31	27	23	27	23	21	18
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	19	16
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	23	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17651	17651	17651
5°	17718	17462	17566
10°	17613	17285	17372
15°	17396	17061	17043
20°	17086	16725	16706
25°	16778	16311	16311
30°	16384	15933	15795
35°	16015	15477	15248
40°	15553	15022	14733
45°	15098	14570	14209
50°	14601	14099	13599
55°	14083	13551	13050
60°	13511	12897	12426
65°	12894	12248	11687
70°	12109	11462	10914
75°	11017	10555	10293
80°	9772	9484	8991
85°	7984	7595	6817



TEST NUMBER: P331566-927

CATALOG NUMBER: S122DIW-S865D710U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.8	2.2
10°-20°	289.3	6.1
20°-30°	425.2	9.0
30°-40°	493.9	10.4
40°-50°	493.3	10.4
50°-60°	430.2	9.1
60°-70°	318.1	6.7
70°-80°	180.2	3.8
80°-90°	51.2	1.1
90°-100°	44.1	0.9
100°-110°	137.1	2.9
110°-120°	234.3	5.0
120°-130°	308.1	6.5
130°-140°	345.9	7.3
140°-150°	339.1	7.2
150°-160°	284.5	6.0
160°-170°	188.7	4.0
170°-180°	65.9	1.4
0°-30°	817.2	17.3
0°-40°	1311.1	27.7
0°-60°	2234.6	47.2
0°-90°	2784.1	58.8
90°-120°	415.5	8.8
90°-150°	1408.7	29.8
90°-180°	1948.0	41.2
0°-180°	4731.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1093	1093	1093	1093	1093	
5°	1093	1089	1077	1085	1084	104
15°	1041	1034	1021	1024	1020	293
25°	942	933	916	917	916	433
35°	812	802	785	779	774	507
45°	661	653	638	627	622	510
55°	500	494	481	469	464	447
65°	338	331	321	311	306	334
75°	177	174	169	163	165	189
85°	43	42	41	38	37	49
90°	1	8	21	20	20	4
95°	31	36	38	38	36	35
105°	126	128	129	130	130	133
115°	235	238	238	237	235	233
125°	342	347	346	344	343	306
135°	443	449	450	450	448	342
145°	537	541	545	545	543	336
155°	614	616	618	620	619	283
165°	668	668	668	672	669	188
175°	695	694	692	696	693	66
180°	697	697	697	697	697	



TEST NUMBER: P331566-927

CATALOG NUMBER: S122DIW-S865D710U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2
2.5°	1098.3	1097.3	1096.4	1095.5	1094.6	1093.1	1091.0	1088.9	1086.9	1084.8	1086.7
5°	1093.2	1092.3	1091.4	1090.4	1089.5	1087.7	1085.2	1082.6	1080.1	1077.4	1079.3
7.5°	1083.5	1082.1	1080.7	1079.2	1077.8	1075.7	1073.1	1070.5	1067.9	1065.2	1067.1
10°	1074.3	1072.7	1071.0	1069.4	1067.8	1065.6	1062.7	1059.9	1057.2	1054.3	1056.2
12.5°	1061.7	1060.3	1058.8	1057.3	1055.9	1053.8	1051.0	1048.1	1045.4	1042.6	1043.9
15°	1040.7	1039.3	1037.8	1036.5	1035.1	1032.8	1029.8	1026.7	1023.7	1020.7	1021.6
17.5°	1013.8	1012.3	1011.0	1009.6	1008.1	1005.9	1002.8	999.7	996.6	993.6	994.7
20°	994.4	993.0	991.7	990.2	988.8	986.5	983.2	979.9	976.7	973.4	974.1
22.5°	975.1	973.1	971.1	969.2	967.3	964.7	961.6	958.5	955.5	952.4	952.5
25°	941.8	940.0	938.1	936.3	934.4	931.4	927.5	923.5	919.6	915.6	916.1
27.5°	904.0	902.4	900.6	899.0	897.3	894.8	891.8	888.6	885.5	882.3	881.7
30°	878.8	876.9	875.0	873.2	871.3	868.6	865.1	861.7	858.1	854.6	853.9
32.5°	851.9	850.4	848.9	847.4	845.9	843.3	839.6	835.9	832.3	828.5	827.3
35°	812.5	810.2	807.9	805.6	803.2	800.2	796.5	792.7	788.9	785.2	783.9
37.5°	768.2	766.1	764.1	762.0	760.0	757.1	753.4	749.6	745.8	742.1	740.4
40°	737.9	736.1	734.2	732.3	730.5	727.6	723.9	720.2	716.4	712.7	710.6
42.5°	708.5	706.6	704.7	702.9	701.0	698.2	694.5	690.8	687.0	683.3	681.0
45°	661.2	659.6	657.9	656.3	654.7	652.0	648.6	645.1	641.6	638.1	635.5
47.5°	614.1	612.6	611.0	609.5	607.9	605.3	601.7	598.0	594.4	590.7	588.0
50°	581.3	580.1	579.0	577.8	576.6	574.4	571.2	567.8	564.6	561.3	558.1
52.5°	549.4	547.8	546.3	544.7	543.2	540.9	537.8	534.7	531.6	528.5	525.9
55°	500.3	499.0	497.6	496.1	494.7	492.7	489.9	487.0	484.3	481.4	478.6
57.5°	451.1	450.0	448.9	447.8	446.7	444.6	441.5	438.4	435.3	432.2	429.5
60°	418.4	417.4	416.5	415.6	414.6	412.6	409.2	406.0	402.7	399.4	396.9
62.5°	386.4	384.9	383.4	381.9	380.4	378.4	375.9	373.4	370.8	368.4	366.0
65°	337.5	336.0	334.6	333.2	331.8	329.9	327.6	325.3	323.0	320.6	318.5
67.5°	287.6	286.5	285.3	284.2	283.1	281.5	279.4	277.3	275.2	273.1	271.5
70°	256.5	255.6	254.6	253.7	252.8	251.2	249.1	247.0	244.9	242.8	241.2
72.5°	224.5	223.6	222.7	221.7	220.8	219.7	218.3	217.0	215.6	214.2	212.6
75°	176.6	176.1	175.6	175.2	174.8	173.9	172.8	171.6	170.4	169.2	167.9
77.5°	133.7	132.9	132.1	131.3	130.6	129.9	129.4	129.0	128.5	128.0	127.3
80°	105.1	104.9	104.6	104.4	104.2	103.9	103.4	102.9	102.4	102.0	101.2
82.5°	78.2	78.2	78.1	78.0	78.0	77.9	77.6	77.3	77.0	76.8	75.8
85°	43.1	42.9	42.6	42.4	42.1	41.9	41.7	41.4	41.2	41.0	40.3
87.5°	15.3	15.2	15.1	15.1	15.1	15.1	15.3	15.4	15.7	15.9	15.3
90°	0.6	2.1	3.7	5.3	6.9	9.1	12.0	14.8	17.7	20.6	20.3
92.5°	10.5	11.6	12.8	13.9	15.1	16.0	16.6	17.3	18.0	18.7	18.8
95°	30.6	31.8	33.2	34.5	35.8	36.6	36.8	37.1	37.4	37.6	37.6
97.5°	55.8	57.0	58.1	59.3	60.4	61.2	61.8	62.3	62.7	63.2	63.2
100°	74.6	75.7	76.8	77.8	78.8	79.5	79.9	80.3	80.7	81.1	81.1
102.5°	94.4	95.2	96.1	96.9	97.8	98.4	98.9	99.4	99.9	100.4	100.5
105°	126.4	126.7	127.1	127.5	127.9	128.3	128.6	128.8	129.0	129.4	129.6
107.5°	158.6	159.1	159.8	160.3	160.9	161.2	161.2	161.2	161.2	161.2	161.3
110°	179.3	180.1	180.9	181.6	182.4	182.8	182.8	182.8	182.8	182.8	182.8



TEST NUMBER: P331566-927

CATALOG NUMBER: S122DIW-S865D710U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	201.8	202.6	203.4	204.2	205.0	205.3	205.3	205.1	205.0	204.9	204.6
115°	235.1	235.9	236.7	237.5	238.3	238.5	238.3	238.0	237.7	237.5	237.3
117.5°	268.3	269.3	270.4	271.4	272.4	272.6	271.9	271.2	270.5	269.7	269.4
120°	290.4	291.4	292.5	293.5	294.5	294.5	293.5	292.5	291.4	290.4	290.4
122.5°	310.6	311.9	313.1	314.3	315.6	315.9	315.1	314.4	313.7	313.0	312.7
125°	342.1	343.3	344.4	345.6	346.8	347.2	346.8	346.4	346.0	345.6	345.2
127.5°	372.8	374.3	375.8	377.2	378.7	379.3	378.8	378.3	377.9	377.4	376.9
130°	392.1	393.8	395.5	397.2	398.9	399.6	399.3	399.1	398.8	398.5	398.3
132.5°	413.8	415.1	416.5	417.9	419.2	420.0	420.0	420.1	420.2	420.2	419.6
135°	442.7	444.1	445.5	446.9	448.4	449.2	449.5	449.8	450.0	450.3	450.1
137.5°	473.1	474.3	475.5	476.7	477.8	478.6	478.9	479.3	479.6	479.9	479.8
140°	491.5	492.6	493.8	495.0	496.1	497.0	497.7	498.4	499.0	499.6	499.6
142.5°	510.2	511.4	512.6	513.8	514.9	515.8	516.2	516.7	517.1	517.5	517.6
145°	537.3	538.2	539.1	540.0	541.0	541.8	542.6	543.4	544.2	544.9	545.0
147.5°	561.4	562.4	563.6	564.7	565.8	566.6	567.1	567.6	568.2	568.7	568.9
150°	577.8	578.6	579.4	580.2	581.0	581.6	582.2	582.7	583.2	583.8	584.2
152.5°	592.4	593.2	594.0	594.8	595.6	596.3	596.9	597.5	598.2	598.8	599.3
155°	614.3	614.7	615.1	615.4	615.8	616.2	616.6	617.0	617.4	617.8	618.5
157.5°	633.0	633.3	633.5	633.7	634.1	634.3	634.5	634.8	635.0	635.3	636.1
160°	644.3	644.5	644.8	645.1	645.3	645.5	645.6	645.8	645.9	646.0	646.8
162.5°	654.6	654.7	654.7	654.7	654.8	654.9	655.1	655.2	655.3	655.5	656.3
165°	668.4	668.2	668.1	668.0	667.9	667.8	667.8	667.8	667.8	667.8	668.7
167.5°	679.9	679.5	679.1	678.7	678.3	678.1	678.1	678.0	678.0	678.0	678.9
170°	686.0	685.6	685.2	684.8	684.4	684.2	684.0	683.9	683.8	683.7	684.6
172.5°	690.2	689.8	689.4	689.0	688.6	688.4	688.2	688.2	688.0	687.9	688.8
175°	695.4	695.1	694.7	694.3	693.9	693.6	693.2	693.0	692.8	692.4	693.4
177.5°	697.5	697.2	696.9	696.6	696.2	696.0	695.8	695.6	695.4	695.1	695.8
180°	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6



TEST NUMBER: P331566-927

CATALOG NUMBER: S122DIW-S865D710U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2
2.5°	1088.5	1090.4	1092.3	1093.1	1092.7	1092.3	1091.9	1091.5
5°	1081.2	1083.1	1085.0	1085.6	1085.2	1084.7	1084.3	1083.8
7.5°	1069.0	1070.9	1072.8	1073.4	1072.9	1072.4	1071.9	1071.3
10°	1058.0	1059.9	1061.8	1062.4	1061.7	1061.0	1060.3	1059.6
12.5°	1045.2	1046.5	1047.8	1048.2	1047.7	1047.2	1046.6	1046.2
15°	1022.5	1023.5	1024.5	1024.3	1023.2	1022.0	1020.8	1019.6
17.5°	995.7	996.8	997.9	997.8	996.7	995.6	994.5	993.4
20°	974.8	975.5	976.2	976.0	975.2	974.2	973.3	972.3
22.5°	952.7	952.8	952.9	952.8	952.1	951.6	951.0	950.5
25°	916.6	917.0	917.4	917.4	917.0	916.6	916.1	915.6
27.5°	881.0	880.3	879.6	878.7	877.5	876.4	875.3	874.2
30°	853.2	852.5	851.8	851.0	850.1	849.1	848.2	847.2
32.5°	826.0	824.7	823.5	822.4	821.5	820.5	819.6	818.6
35°	782.4	781.0	779.7	778.3	777.2	776.0	774.8	773.6
37.5°	738.7	737.0	735.2	733.8	732.7	731.6	730.5	729.3
40°	708.5	706.4	704.3	702.7	701.9	700.9	700.0	699.0
42.5°	678.7	676.4	674.1	672.3	671.0	669.7	668.4	667.1
45°	633.0	630.3	627.8	626.1	625.1	624.2	623.2	622.3
47.5°	585.3	582.7	580.0	577.9	576.6	575.2	573.9	572.5
50°	554.8	551.5	548.3	546.1	544.9	543.7	542.6	541.4
52.5°	523.1	520.4	517.7	515.6	514.0	512.5	511.0	509.4
55°	475.9	473.0	470.2	468.3	467.1	465.9	464.8	463.6
57.5°	426.7	424.0	421.2	419.4	418.5	417.6	416.8	415.8
60°	394.3	391.7	389.2	387.5	386.8	386.1	385.4	384.8
62.5°	363.5	361.2	358.8	357.2	356.2	355.4	354.5	353.6
65°	316.4	314.3	312.2	310.5	309.4	308.2	307.0	305.9
67.5°	269.8	268.2	266.6	265.3	264.4	263.4	262.4	261.5
70°	239.6	237.9	236.3	235.0	234.1	233.1	232.2	231.2
72.5°	211.0	209.3	207.7	206.5	205.7	205.0	204.2	203.5
75°	166.4	165.0	163.7	163.2	163.7	164.1	164.5	165.0
77.5°	126.7	126.0	125.2	124.5	123.9	123.3	122.6	121.9
80°	100.5	99.9	99.2	98.5	98.1	97.7	97.2	96.7
82.5°	74.9	74.1	73.2	72.7	72.6	72.5	72.4	72.3
85°	39.6	38.9	38.2	37.7	37.5	37.2	37.0	36.8
87.5°	14.7	14.0	13.5	13.1	12.9	12.8	12.6	12.4
90°	20.0	19.8	19.6	19.5	19.6	19.7	19.9	20.0
92.5°	18.8	18.9	18.9	18.9	18.9	19.0	19.0	19.0
95°	37.6	37.6	37.6	37.5	37.2	37.0	36.7	36.4
97.5°	63.2	63.2	63.2	63.2	63.2	63.2	63.1	63.1
100°	81.1	81.1	81.1	81.0	81.0	80.8	80.6	80.6
102.5°	100.6	100.7	100.8	100.8	100.7	100.5	100.4	100.3
105°	129.8	130.1	130.4	130.5	130.5	130.5	130.5	130.5
107.5°	161.4	161.5	161.6	161.4	160.7	160.2	159.5	159.0
110°	182.8	182.8	182.8	182.6	182.2	181.8	181.4	181.1



TEST NUMBER: P331566-927

CATALOG NUMBER: S122DIW-S865D710U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	204.3	204.0	203.7	203.4	203.1	202.8	202.5	202.2
115°	237.3	237.1	236.9	236.7	236.3	235.9	235.5	235.1
117.5°	269.1	268.8	268.5	268.1	267.7	267.3	266.9	266.5
120°	290.4	290.4	290.4	290.2	289.8	289.4	289.0	288.6
122.5°	312.4	312.0	311.7	311.4	311.1	310.9	310.5	310.3
125°	344.8	344.4	344.0	343.8	343.7	343.6	343.4	343.3
127.5°	376.4	376.0	375.5	375.1	374.6	374.2	373.8	373.4
130°	398.1	397.8	397.5	397.1	396.6	396.1	395.5	395.1
132.5°	419.1	418.4	417.9	417.4	417.0	416.5	416.1	415.7
135°	450.0	449.9	449.8	449.5	449.1	448.7	448.3	447.9
137.5°	479.7	479.6	479.5	479.2	478.6	478.2	477.6	477.1
140°	499.6	499.6	499.6	499.4	498.9	498.4	497.8	497.3
142.5°	517.8	517.8	517.9	517.8	517.2	516.7	516.2	515.6
145°	545.2	545.3	545.4	545.3	544.7	544.2	543.7	543.2
147.5°	569.3	569.5	569.8	569.7	569.3	568.7	568.2	567.8
150°	584.5	584.9	585.3	585.3	584.9	584.5	584.2	583.8
152.5°	599.8	600.2	600.8	600.8	600.2	599.8	599.3	598.8
155°	619.1	619.8	620.4	620.6	620.2	619.8	619.4	619.0
157.5°	637.0	637.9	638.7	638.9	638.3	637.6	637.0	636.4
160°	647.6	648.4	649.2	649.3	648.8	648.2	647.8	647.2
162.5°	657.2	658.1	659.0	659.1	658.5	657.9	657.3	656.6
165°	669.6	670.5	671.5	671.6	670.9	670.3	669.6	669.0
167.5°	679.9	680.7	681.7	681.8	681.1	680.4	679.8	679.1
170°	685.5	686.4	687.3	687.4	686.6	685.8	685.0	684.2
172.5°	689.8	690.6	691.6	691.6	690.9	690.1	689.3	688.5
175°	694.3	695.2	696.2	696.2	695.4	694.7	693.9	693.1
177.5°	696.4	697.0	697.7	697.7	697.0	696.4	695.8	695.1
180°	696.6	696.6	696.6	696.6	696.6	696.6	696.6	696.6

(END OF REPORT)