

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331851-927

Luminaire Tested: **S122RDIW-S1005D710U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331851-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S1005D710U927-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 710 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5007.1 lumens
Efficiency: N/A
Efficacy: 83.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 59.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331851-927

CATALOG NUMBER: S122RDIW-S1005D710U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

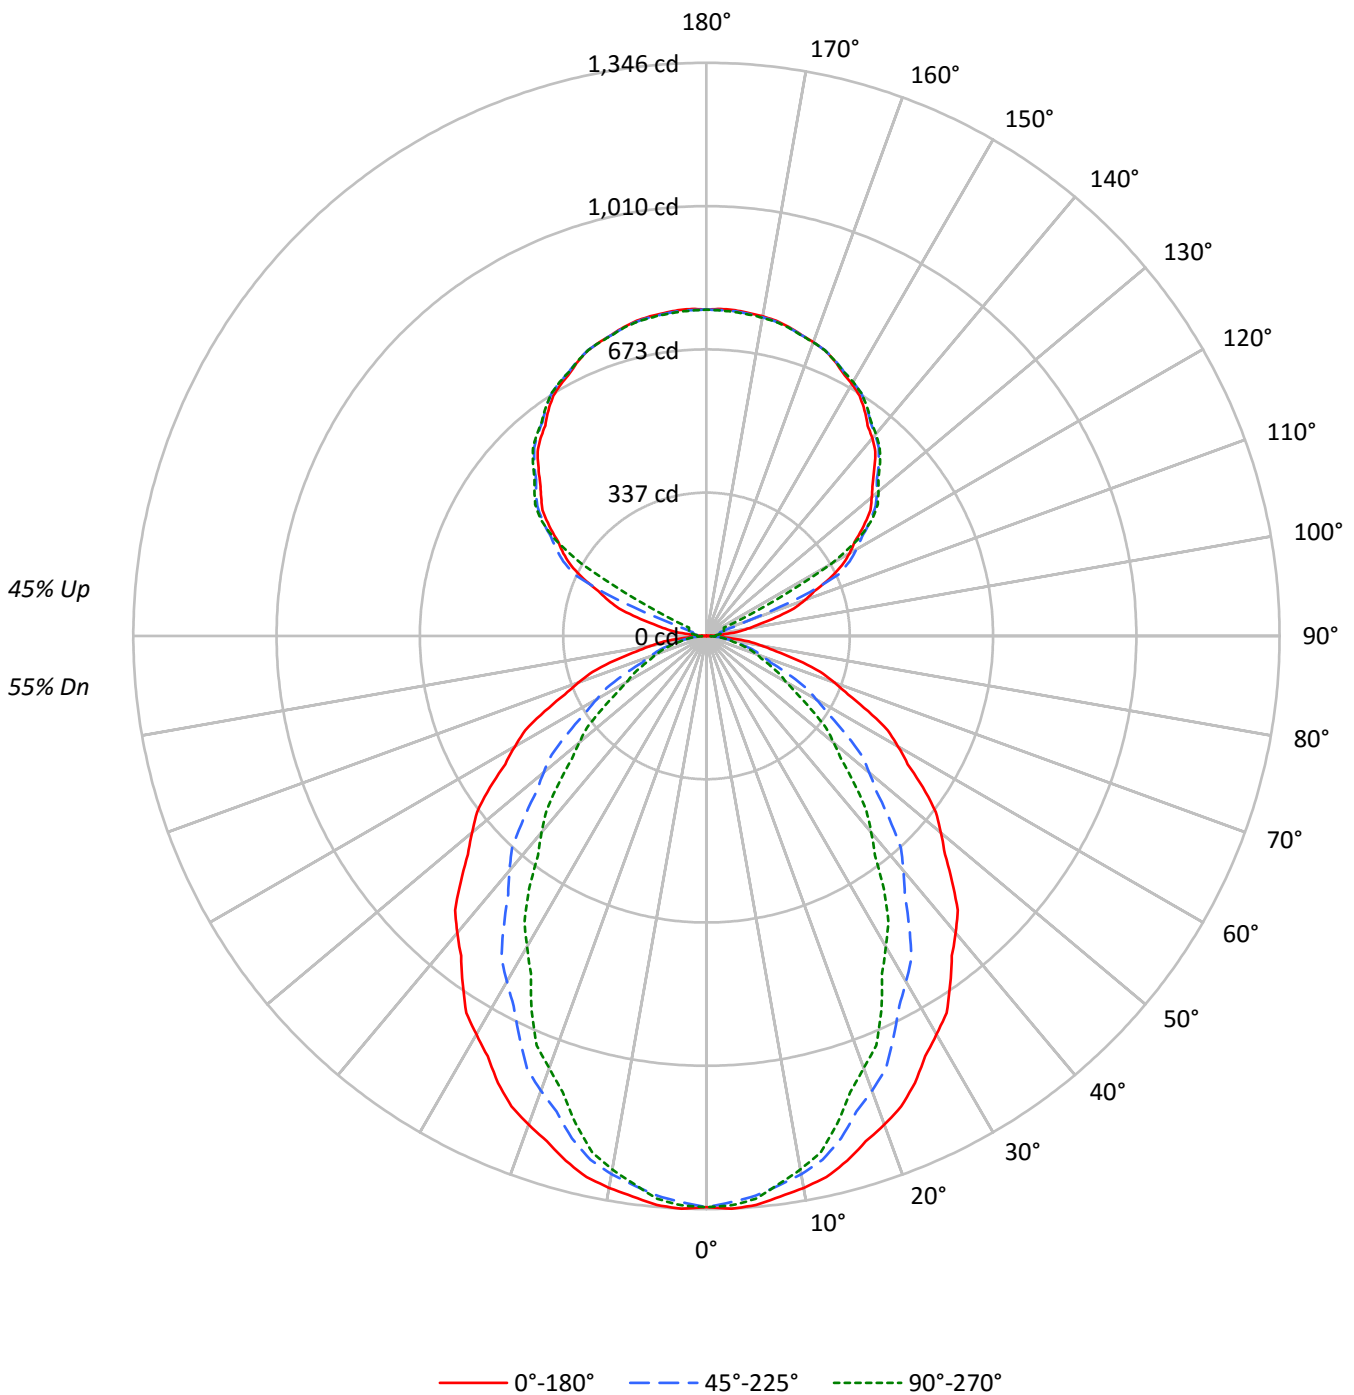



TEST NUMBER: P331851-927

CATALOG NUMBER: S122RDIW-S1005D710U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	92	88	92	89	85	83	76	74	72	65	63	62	55	53	52	47
2	91	84	78	73	84	78	73	69	68	64	60	58	55	52	49	47	45	41
3	83	74	67	61	77	69	63	58	60	55	51	52	48	45	44	41	39	35
4	77	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	31
5	70	59	51	45	65	55	48	43	48	43	39	42	38	34	36	33	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	34	30	33	29	27	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	21
8	56	44	36	31	52	41	35	30	37	31	27	32	28	24	28	24	22	19
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	26	22	20	18
10	49	37	30	25	46	35	29	24	31	26	22	27	23	20	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	21660	21660	21660
5°	21742	21389	21507
10°	21577	21040	20859
15°	21329	20415	19826
20°	20984	19524	18545
25°	20633	18513	17302
30°	20144	17473	15709
35°	19669	16344	14310
40°	19191	15173	12690
45°	18630	13860	11227
50°	18053	12534	9789
55°	17464	11108	8408
60°	16779	9607	6978
65°	16000	8073	6357
70°	15073	6652	5844
75°	13936	6057	5452
80°	12301	5421	4965
85°	9670	4279	4279



TEST NUMBER: P331851-927

CATALOG NUMBER: S122RDIW-S1005D710U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.6	2.5
10°-20°	344.8	6.9
20°-30°	484.2	9.7
30°-40°	528.0	10.5
40°-50°	485.4	9.7
50°-60°	381.3	7.6
60°-70°	248.6	5.0
70°-80°	128.2	2.6
80°-90°	35.1	0.7
90°-100°	25.6	0.5
100°-110°	93.8	1.9
110°-120°	250.6	5.0
120°-130°	413.7	8.3
130°-140°	440.0	8.8
140°-150°	408.9	8.2
150°-160°	328.8	6.6
160°-170°	211.9	4.2
170°-180°	72.9	1.5
0°-30°	954.5	19.1
0°-40°	1482.5	29.6
0°-60°	2349.2	46.9
0°-90°	2761.1	55.1
90°-120°	369.9	7.4
90°-150°	1632.5	32.6
90°-180°	2246.0	44.9
0°-180°	5007.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1342	1342	1342	1342	1342	
5°	1342	1335	1320	1330	1327	127
15°	1276	1261	1221	1199	1186	359
25°	1158	1117	1039	991	971	532
35°	998	934	829	755	726	624
45°	816	732	607	524	492	630
55°	620	524	395	324	299	554
65°	419	320	211	172	166	415
75°	223	141	97	89	87	236
85°	52	28	23	23	23	62
90°	1	6	11	14	15	4
95°	36	19	22	24	24	44
105°	169	176	34	40	42	180
115°	319	329	342	97	46	314
125°	451	458	469	472	474	402
135°	558	567	572	577	576	431
145°	647	647	656	660	657	405
155°	713	708	714	717	713	328
165°	751	748	749	753	749	212
175°	768	764	765	769	764	73
180°	766	766	766	766	766	



TEST NUMBER: P331851-927

CATALOG NUMBER: S122RDIW-S1005D710U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5
2.5°	1346.4	1345.3	1344.2	1343.1	1342.0	1340.3	1337.9	1335.6	1333.2	1330.9	1333.0
5°	1341.5	1340.1	1338.8	1337.4	1336.1	1333.7	1330.2	1326.7	1323.2	1319.7	1322.1
7.5°	1327.7	1326.0	1324.4	1322.6	1321.0	1318.1	1314.0	1309.9	1305.8	1301.7	1302.4
10°	1316.1	1314.2	1312.2	1310.3	1308.4	1304.8	1299.4	1294.0	1288.6	1283.3	1282.5
12.5°	1301.5	1299.1	1296.8	1294.5	1292.2	1287.5	1280.6	1273.7	1266.9	1260.0	1258.5
15°	1276.0	1273.0	1270.0	1267.0	1264.1	1258.0	1248.9	1239.7	1230.5	1221.3	1216.2
17.5°	1244.6	1240.1	1235.6	1231.1	1226.5	1218.4	1206.6	1194.8	1183.0	1171.3	1165.2
20°	1221.3	1215.9	1210.5	1205.1	1199.8	1190.3	1176.8	1163.3	1149.9	1136.3	1129.6
22.5°	1196.0	1190.0	1184.0	1178.0	1171.9	1161.3	1146.1	1130.8	1115.6	1100.4	1091.7
25°	1158.2	1149.5	1140.9	1132.3	1123.6	1110.5	1092.7	1074.8	1057.0	1039.2	1028.2
27.5°	1112.5	1103.2	1093.8	1084.4	1075.0	1060.3	1040.2	1020.1	1000.1	980.0	967.1
30°	1080.5	1070.2	1060.0	1049.7	1039.5	1023.6	1002.0	980.4	958.9	937.2	923.4
32.5°	1049.4	1037.4	1025.5	1013.5	1001.5	984.5	962.5	940.5	918.5	896.4	880.7
35°	997.9	984.2	970.4	956.6	942.9	924.2	900.4	876.7	852.9	829.2	812.2
37.5°	946.5	931.4	916.2	901.1	886.1	865.9	840.5	815.2	789.9	764.6	745.9
40°	910.5	894.4	878.1	862.0	845.8	824.6	798.4	772.3	746.1	719.9	700.8
42.5°	873.6	856.6	839.6	822.4	805.4	783.4	756.4	729.3	702.3	675.3	655.5
45°	815.9	797.7	779.7	761.6	743.5	720.3	692.0	663.7	635.3	607.0	587.9
47.5°	759.5	740.4	721.2	702.0	682.9	658.7	629.5	600.2	570.9	541.7	522.7
50°	718.7	699.6	680.4	661.2	642.1	617.7	588.0	558.3	528.6	499.0	480.4
52.5°	678.9	658.9	638.9	618.9	598.8	574.3	545.3	516.3	487.2	458.2	440.2
55°	620.4	599.4	578.3	557.2	536.2	511.1	482.0	452.8	423.7	394.6	378.3
57.5°	560.4	538.8	517.2	495.7	474.0	449.2	421.3	393.2	365.3	337.2	322.4
60°	519.6	498.0	476.4	454.9	433.2	408.6	380.8	353.0	325.2	297.5	283.7
62.5°	479.8	458.2	436.7	415.0	393.5	369.4	342.9	316.4	289.9	263.5	250.3
65°	418.8	397.0	375.2	353.3	331.4	308.4	284.1	259.8	235.5	211.3	202.1
67.5°	360.0	338.4	316.7	295.0	273.3	251.5	229.7	207.9	186.0	164.1	159.9
70°	319.3	298.3	277.2	256.2	235.1	215.3	196.7	178.1	159.5	140.9	138.2
72.5°	280.4	260.2	240.1	219.9	199.7	182.1	167.2	152.3	137.3	122.4	120.1
75°	223.4	204.5	185.6	166.8	147.8	133.8	124.6	115.5	106.3	97.1	95.2
77.5°	167.3	150.8	134.2	117.6	101.0	90.5	86.1	81.7	77.2	72.9	71.8
80°	132.3	118.6	104.8	91.0	77.3	69.1	66.4	63.7	61.0	58.3	57.2
82.5°	100.3	89.5	78.8	68.0	57.4	51.0	49.2	47.4	45.6	43.7	43.1
85°	52.2	46.5	40.9	35.2	29.5	26.3	25.5	24.7	23.8	23.1	23.1
87.5°	15.7	14.2	12.8	11.2	9.8	9.2	9.4	9.6	9.8	10.0	9.9
90°	0.6	1.9	3.2	4.6	5.9	7.1	8.2	9.1	10.1	11.1	11.7
92.5°	11.2	11.1	10.9	10.9	10.7	10.9	11.4	11.9	12.4	12.8	13.2
95°	36.0	32.0	27.9	23.8	19.8	18.1	19.0	19.9	20.8	21.6	22.3
97.5°	71.5	60.0	48.6	37.2	25.7	21.0	23.0	25.0	26.9	28.9	29.5
100°	98.2	81.3	64.4	47.5	30.7	23.2	25.3	27.4	29.5	31.6	32.6
102.5°	127.5	123.9	120.3	116.7	113.1	102.6	85.1	67.6	50.0	32.5	33.7
105°	168.6	172.3	176.0	179.7	183.4	168.4	134.8	101.1	67.5	33.8	35.2
107.5°	215.5	218.5	221.5	224.4	227.4	208.7	168.4	128.1	87.7	47.4	45.9
110°	245.7	248.3	250.9	253.4	256.0	239.5	203.9	168.3	132.7	97.0	84.8



TEST NUMBER: P331851-927

CATALOG NUMBER: S122RDIW-S1005D710U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	274.1	276.4	278.7	280.9	283.2	280.0	271.2	262.4	253.6	244.8	199.9
115°	318.9	321.0	323.1	325.2	327.3	329.9	333.0	336.0	339.1	342.1	285.1
117.5°	358.9	361.2	363.6	365.9	368.3	370.5	372.6	374.8	376.8	379.0	365.2
120°	388.2	390.1	391.9	393.7	395.6	397.6	399.8	402.0	404.3	406.5	408.0
122.5°	413.0	415.0	416.9	418.9	420.8	423.0	425.4	427.9	430.2	432.7	433.6
125°	450.8	452.5	454.1	455.7	457.2	459.2	461.6	463.9	466.3	468.6	469.4
127.5°	485.1	486.9	488.7	490.4	492.3	494.0	495.7	497.5	499.2	501.0	502.2
130°	506.8	508.8	510.8	512.8	514.8	516.4	517.8	519.1	520.5	521.9	523.2
132.5°	529.1	530.8	532.4	534.1	535.8	537.3	538.6	540.0	541.4	542.7	543.8
135°	557.9	559.8	561.8	563.8	565.8	567.4	568.5	569.6	570.7	571.8	573.0
137.5°	587.1	588.4	589.9	591.2	592.6	593.9	595.2	596.4	597.7	599.0	600.2
140°	606.2	607.1	608.1	609.1	610.1	611.2	612.6	613.9	615.3	616.7	617.8
142.5°	622.1	623.0	623.9	624.8	625.7	626.9	628.4	630.0	631.5	633.1	634.1
145°	647.2	647.1	647.0	646.8	646.7	647.7	649.7	651.9	653.9	656.1	657.0
147.5°	669.0	668.6	668.1	667.7	667.2	668.0	670.0	672.1	674.1	676.2	676.9
150°	683.3	682.4	681.5	680.6	679.8	680.3	682.3	684.3	686.3	688.2	689.0
152.5°	695.2	694.3	693.3	692.3	691.3	691.8	693.7	695.5	697.4	699.3	700.1
155°	712.6	711.5	710.4	709.3	708.2	708.4	709.9	711.3	712.8	714.3	715.0
157.5°	726.3	725.3	724.4	723.4	722.5	722.5	723.6	724.6	725.6	726.7	727.5
160°	734.3	733.5	732.8	732.1	731.3	731.3	732.1	732.8	733.5	734.3	735.0
162.5°	741.3	740.6	739.9	739.1	738.4	738.3	738.9	739.7	740.3	740.9	741.7
165°	750.9	750.1	749.4	748.7	747.9	747.7	748.1	748.5	748.8	749.2	750.1
167.5°	758.0	757.2	756.5	755.7	755.0	754.9	755.2	755.5	755.9	756.2	757.1
170°	762.0	761.2	760.5	759.8	759.0	758.8	759.0	759.3	759.5	759.8	760.7
172.5°	764.6	763.9	763.2	762.4	761.7	761.4	761.7	761.9	762.2	762.4	763.3
175°	768.1	767.2	766.4	765.5	764.6	764.3	764.5	764.9	765.1	765.3	766.2
177.5°	768.7	767.9	767.2	766.6	765.9	765.6	765.6	765.8	765.9	766.0	766.7
180°	766.4	766.4	766.4	766.4	766.4	766.4	766.4	766.4	766.4	766.4	766.4



TEST NUMBER: P331851-927

CATALOG NUMBER: S122RDIW-S1005D710U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5
2.5°	1335.1	1337.3	1339.5	1340.3	1339.9	1339.5	1339.0	1338.6
5°	1324.5	1327.0	1329.4	1330.2	1329.4	1328.6	1327.8	1327.0
7.5°	1303.1	1303.8	1304.5	1304.2	1302.7	1301.3	1300.0	1298.5
10°	1281.6	1280.8	1280.0	1278.8	1277.2	1275.6	1273.9	1272.3
12.5°	1257.0	1255.5	1254.1	1252.0	1249.4	1246.7	1244.0	1241.3
15°	1211.1	1205.9	1200.8	1196.9	1194.2	1191.5	1188.8	1186.1
17.5°	1159.1	1153.0	1146.9	1141.5	1136.9	1132.3	1127.6	1123.0
20°	1122.8	1116.1	1109.4	1103.0	1097.1	1091.2	1085.2	1079.3
22.5°	1083.1	1074.4	1065.6	1059.1	1054.7	1050.3	1045.8	1041.4
25°	1017.1	1006.1	995.0	987.5	983.3	979.3	975.3	971.2
27.5°	954.2	941.3	928.4	918.7	912.3	905.9	899.4	893.0
30°	909.7	896.0	882.2	871.7	864.4	857.1	849.9	842.6
32.5°	865.1	849.4	833.6	822.4	815.6	808.7	801.8	795.0
35°	795.2	778.2	761.2	749.7	743.8	737.8	731.9	726.0
37.5°	727.1	708.4	689.7	676.9	670.2	663.4	656.6	649.7
40°	681.6	662.4	643.3	630.3	623.2	616.2	609.2	602.1
42.5°	635.6	615.8	596.0	582.7	575.9	569.1	562.4	555.6
45°	568.7	549.5	530.4	517.6	511.1	504.6	498.1	491.7
47.5°	503.6	484.6	465.5	453.0	447.2	441.3	435.4	429.5
50°	461.8	443.1	424.5	412.3	406.7	401.0	395.4	389.7
52.5°	422.2	404.3	386.3	374.7	369.5	364.2	359.0	353.8
55°	362.2	346.0	329.8	319.2	314.0	308.9	303.8	298.7
57.5°	307.6	292.7	277.9	268.3	264.0	259.7	255.4	251.0
60°	269.9	256.2	242.4	233.4	229.0	224.7	220.4	216.1
62.5°	237.3	224.1	211.0	203.1	200.6	198.0	195.4	192.8
65°	192.9	183.7	174.5	169.5	168.7	167.9	167.2	166.4
67.5°	155.7	151.5	147.3	144.7	143.9	143.1	142.2	141.3
70°	135.5	132.8	130.1	128.2	127.1	126.0	124.9	123.8
72.5°	117.9	115.6	113.3	111.9	111.2	110.6	109.9	109.2
75°	93.3	91.5	89.6	88.5	88.2	87.9	87.7	87.4
77.5°	70.7	69.6	68.5	67.7	67.3	66.9	66.5	66.1
80°	56.1	55.1	53.9	53.4	53.4	53.4	53.4	53.4
82.5°	42.4	41.7	41.1	40.8	40.8	40.8	40.8	40.8
85°	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1
87.5°	9.8	9.7	9.6	9.6	9.7	9.7	9.7	9.8
90°	12.4	12.9	13.5	14.0	14.3	14.5	14.7	15.0
92.5°	13.5	13.9	14.2	14.4	14.5	14.7	14.8	15.0
95°	22.9	23.4	24.1	24.3	24.2	24.1	24.0	23.8
97.5°	29.9	30.4	30.9	31.2	31.4	31.5	31.7	31.8
100°	33.6	34.5	35.6	36.2	36.4	36.7	36.9	37.2
102.5°	35.1	36.4	37.6	38.4	38.8	39.1	39.5	39.8
105°	36.5	37.9	39.2	40.2	40.6	41.2	41.7	42.1
107.5°	44.6	43.3	41.8	41.4	41.9	42.4	42.9	43.3
110°	72.4	60.0	47.8	41.8	42.3	42.9	43.3	43.8



TEST NUMBER: P331851-927

CATALOG NUMBER: S122RDIW-S1005D710U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	154.9	110.0	65.0	42.7	43.1	43.5	43.9	44.3
115°	228.1	171.0	113.9	81.0	72.1	63.2	54.3	45.5
117.5°	351.4	337.5	323.8	302.3	273.1	244.0	214.8	185.7
120°	409.5	410.9	412.4	404.8	388.2	371.5	354.9	338.3
122.5°	434.4	435.3	436.3	435.1	431.8	428.6	425.4	422.2
125°	470.3	471.2	472.1	472.7	473.0	473.4	473.8	474.1
127.5°	503.5	504.8	506.0	506.7	506.8	506.8	506.9	507.0
130°	524.6	525.9	527.3	527.9	527.8	527.7	527.5	527.4
132.5°	545.0	546.2	547.3	547.9	547.7	547.6	547.5	547.4
135°	574.3	575.4	576.7	577.2	576.9	576.7	576.5	576.2
137.5°	601.3	602.5	603.8	604.2	603.7	603.3	602.9	602.5
140°	618.9	620.0	621.2	621.4	620.8	620.1	619.5	618.9
142.5°	635.1	636.1	637.2	637.3	636.8	636.1	635.5	634.9
145°	657.7	658.6	659.5	659.7	659.0	658.4	657.7	657.2
147.5°	677.6	678.2	678.8	678.9	678.3	677.9	677.3	676.8
150°	689.7	690.5	691.2	691.3	690.6	690.0	689.4	688.8
152.5°	700.8	701.6	702.3	702.3	701.4	700.6	699.8	698.9
155°	715.7	716.5	717.2	717.1	716.1	715.2	714.2	713.2
157.5°	728.4	729.2	730.1	730.0	729.0	728.1	727.1	726.1
160°	735.7	736.5	737.2	737.1	736.3	735.4	734.6	733.7
162.5°	742.6	743.4	744.3	744.2	743.1	742.0	740.9	739.9
165°	751.0	751.8	752.7	752.7	751.8	751.0	750.1	749.2
167.5°	758.0	758.8	759.6	759.5	758.4	757.3	756.2	755.1
170°	761.5	762.3	763.2	763.1	762.0	760.9	759.8	758.7
172.5°	764.1	765.0	765.9	765.7	764.6	763.5	762.4	761.3
175°	767.1	767.9	768.7	768.6	767.3	766.1	764.9	763.7
177.5°	767.4	768.0	768.7	768.7	767.8	766.8	766.0	765.1
180°	766.4	766.4	766.4	766.4	766.4	766.4	766.4	766.4

(END OF REPORT)