

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331776-927

Luminaire Tested: **S122RDIW-S290D970U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331776-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S290D970U927-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3480.3 lumens
Efficiency: N/A
Efficacy: 91.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 38
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331776-927

CATALOG NUMBER: S122RDIW-S290D970U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

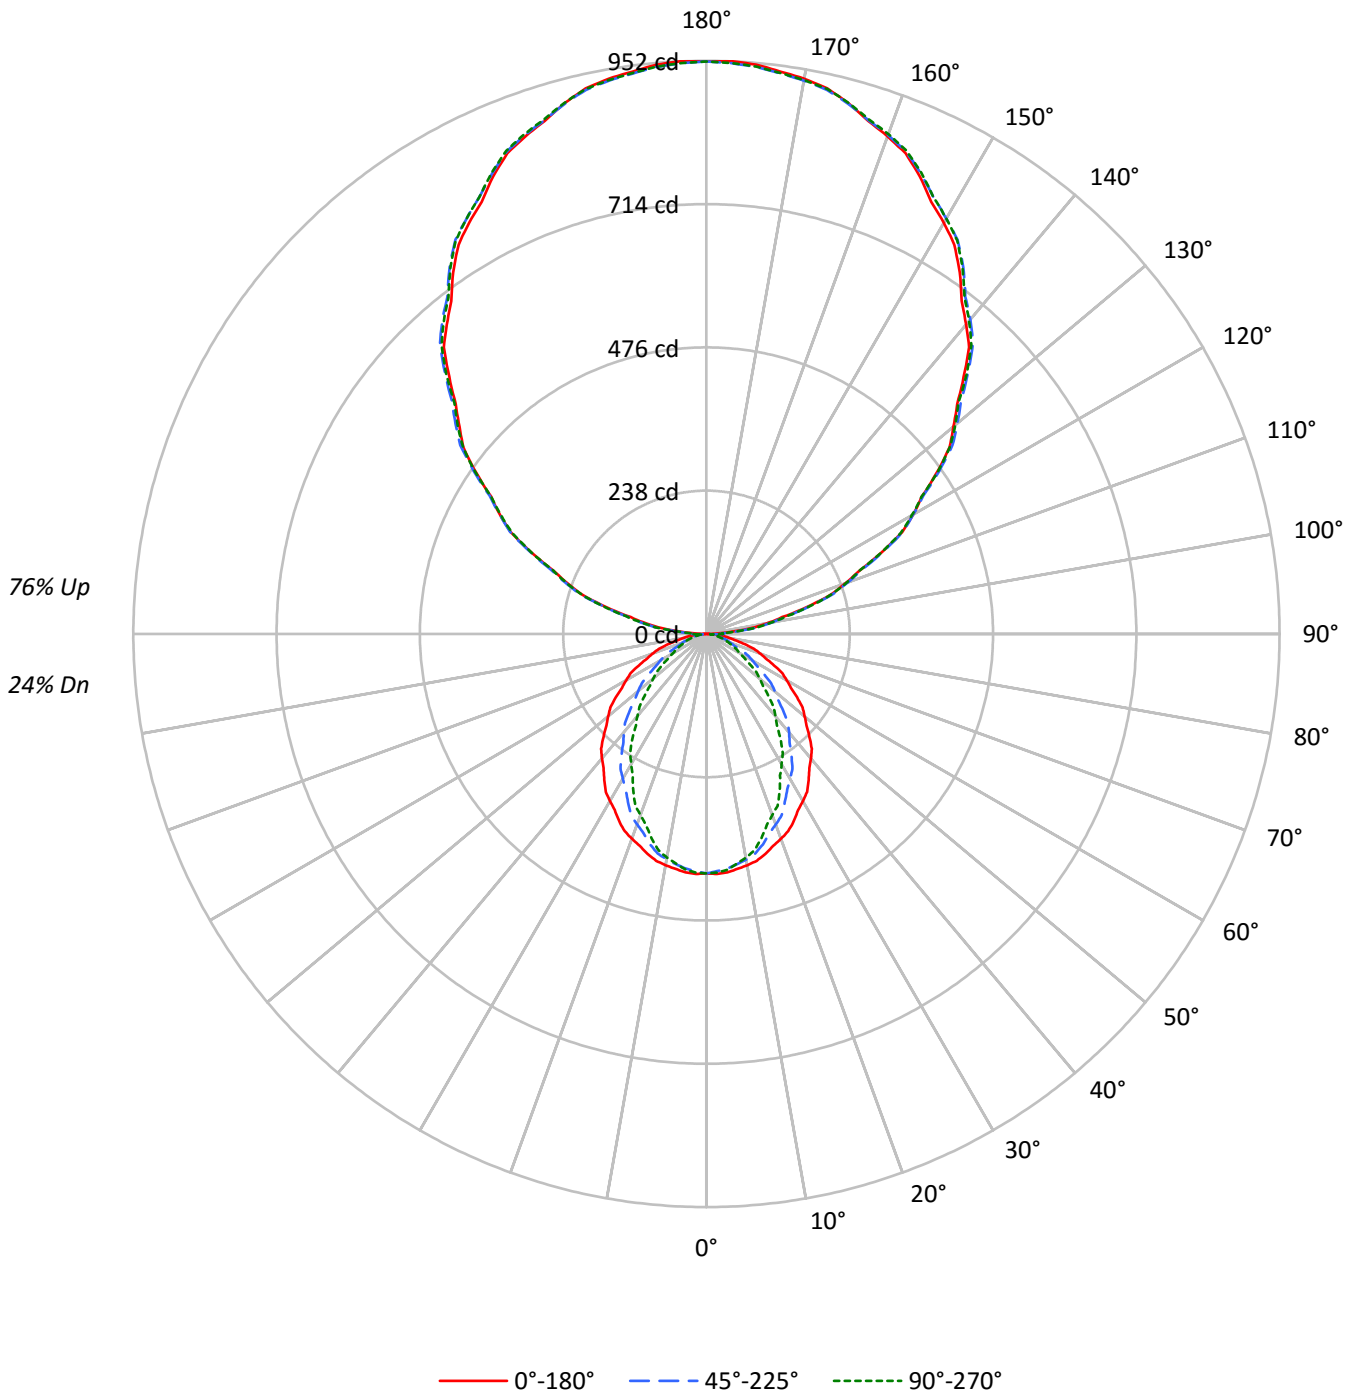



TEST NUMBER: P331776-927

CATALOG NUMBER: S122RDIW-S290D970U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	49	49	49	32	32	32	24
1	92	88	84	81	82	78	75	73	60	58	57	44	43	41	28	28	27	20
2	84	77	71	66	74	69	64	60	53	50	47	39	37	35	25	24	23	17
3	77	68	61	56	68	61	55	50	47	43	40	34	32	30	23	21	20	15
4	70	60	53	47	62	54	47	43	42	37	34	31	28	26	20	19	17	13
5	64	53	46	40	57	48	41	36	37	33	29	28	25	22	18	17	15	11
6	59	48	40	35	52	43	36	32	34	29	25	25	22	19	17	15	14	10
7	55	43	36	30	48	39	32	28	30	26	22	23	19	17	15	13	12	9
8	51	39	32	27	45	35	29	24	28	23	20	21	18	15	14	12	11	8
9	47	35	28	24	42	32	26	22	25	21	18	19	16	14	13	11	10	7
10	44	32	26	21	39	29	23	19	23	19	16	17	14	12	12	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6421	6421	6421
5°	6446	6340	6374
10°	6396	6237	6184
15°	6322	6051	5877
20°	6220	5787	5498
25°	6116	5489	5129
30°	5972	5179	4657
35°	5830	4845	4242
40°	5689	4498	3762
45°	5523	4108	3329
50°	5350	3715	2901
55°	5177	3291	2494
60°	4973	2848	2070
65°	4741	2392	1883
70°	4471	1969	1733
75°	4130	1797	1616
80°	3645	1609	1469
85°	2853	1260	1260



TEST NUMBER: P331776-927

CATALOG NUMBER: S122RDIW-S290D970U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.2	1.1
10°-20°	102.2	2.9
20°-30°	143.5	4.1
30°-40°	156.5	4.5
40°-50°	143.9	4.1
50°-60°	113.0	3.2
60°-70°	73.7	2.1
70°-80°	38.0	1.1
80°-90°	13.6	0.4
90°-100°	60.2	1.7
100°-110°	187.1	5.4
110°-120°	319.9	9.2
120°-130°	420.6	12.1
130°-140°	472.1	13.6
140°-150°	462.9	13.3
150°-160°	388.3	11.2
160°-170°	257.5	7.4
170°-180°	90.0	2.6
0°-30°	282.9	8.1
0°-40°	439.4	12.6
0°-60°	696.4	20.0
0°-90°	821.7	23.6
90°-120°	567.2	16.3
90°-150°	1922.8	55.2
90°-180°	2659.0	76.4
0°-180°	3480.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	398	398	398	398	398	
5°	398	396	391	394	393	38
15°	378	374	362	355	352	106
25°	343	331	308	294	288	158
35°	296	277	246	224	215	185
45°	242	217	180	155	146	187
55°	184	155	117	96	89	164
65°	124	95	63	51	49	123
75°	66	42	29	26	26	70
85°	15	8	7	7	7	18
90°	1	11	28	27	27	3
95°	42	49	51	51	50	48
105°	172	175	176	178	178	182
115°	321	325	324	323	321	317
125°	467	474	472	470	469	417
135°	604	613	615	614	611	467
145°	733	739	744	744	741	458
155°	838	841	843	847	845	386
165°	912	912	912	917	913	257
175°	949	947	945	950	946	90
180°	951	951	951	951	951	



TEST NUMBER: P331776-927

CATALOG NUMBER: S122RDIW-S290D970U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	397.7	397.7	397.7	397.7	397.7	397.7	397.7	397.7	397.7	397.7	397.7
2.5°	399.1	398.8	398.5	398.2	397.8	397.3	396.6	395.9	395.2	394.5	395.1
5°	397.7	397.3	396.9	396.5	396.1	395.3	394.3	393.2	392.2	391.2	391.9
7.5°	393.6	393.1	392.5	392.1	391.6	390.7	389.5	388.2	387.1	385.9	386.0
10°	390.1	389.5	389.0	388.4	387.9	386.7	385.2	383.6	382.0	380.4	380.2
12.5°	385.8	385.1	384.4	383.7	383.0	381.7	379.6	377.6	375.5	373.4	373.0
15°	378.2	377.3	376.4	375.6	374.7	372.9	370.2	367.5	364.7	362.0	360.5
17.5°	368.9	367.6	366.2	364.9	363.5	361.2	357.7	354.2	350.7	347.2	345.4
20°	362.0	360.4	358.9	357.2	355.6	352.8	348.8	344.8	340.9	336.8	334.9
22.5°	354.6	352.8	350.9	349.2	347.4	344.2	339.7	335.2	330.7	326.2	323.6
25°	343.3	340.7	338.2	335.6	333.1	329.2	323.8	318.6	313.3	308.1	304.8
27.5°	329.8	327.0	324.2	321.5	318.6	314.3	308.3	302.4	296.4	290.5	286.7
30°	320.3	317.3	314.2	311.2	308.2	303.4	297.0	290.7	284.2	277.8	273.8
32.5°	311.1	307.5	304.0	300.4	296.8	291.8	285.3	278.8	272.3	265.7	261.1
35°	295.8	291.8	287.6	283.6	279.5	273.9	266.9	259.8	252.9	245.8	240.7
37.5°	280.6	276.1	271.6	267.1	262.6	256.7	249.1	241.6	234.2	226.6	221.1
40°	269.9	265.1	260.3	255.5	250.7	244.5	236.7	228.9	221.2	213.4	207.7
42.5°	259.0	253.9	248.8	243.8	238.8	232.2	224.2	216.2	208.2	200.2	194.3
45°	241.9	236.5	231.1	225.8	220.4	213.5	205.1	196.7	188.3	179.9	174.3
47.5°	225.1	219.4	213.8	208.1	202.4	195.3	186.6	177.9	169.2	160.6	155.0
50°	213.0	207.4	201.7	196.0	190.4	183.1	174.3	165.5	156.7	147.9	142.4
52.5°	201.2	195.3	189.4	183.5	177.5	170.2	161.6	153.0	144.4	135.8	130.5
55°	183.9	177.7	171.4	165.2	158.9	151.5	142.8	134.2	125.6	116.9	112.2
57.5°	166.1	159.7	153.3	146.9	140.5	133.2	124.8	116.6	108.3	100.0	95.5
60°	154.0	147.7	141.2	134.8	128.4	121.1	112.9	104.6	96.4	88.2	84.1
62.5°	142.2	135.9	129.4	123.0	116.6	109.5	101.6	93.8	86.0	78.1	74.2
65°	124.1	117.6	111.2	104.7	98.2	91.4	84.2	77.0	69.8	62.6	59.9
67.5°	106.7	100.3	93.9	87.5	81.0	74.5	68.0	61.6	55.1	48.6	47.4
70°	94.7	88.4	82.1	76.0	69.7	63.8	58.3	52.8	47.3	41.7	41.0
72.5°	83.1	77.2	71.1	65.2	59.2	54.0	49.6	45.2	40.7	36.3	35.6
75°	66.2	60.6	55.1	49.4	43.8	39.7	36.9	34.2	31.5	28.8	28.2
77.5°	49.6	44.7	39.8	34.9	29.9	26.9	25.5	24.2	22.9	21.6	21.3
80°	39.2	35.2	31.1	27.0	22.9	20.4	19.6	18.9	18.1	17.3	17.0
82.5°	29.7	26.5	23.4	20.2	17.0	15.1	14.6	14.0	13.5	13.0	12.8
85°	15.4	13.8	12.1	10.5	8.8	7.8	7.5	7.3	7.1	6.8	6.8
87.5°	4.8	4.7	4.6	4.5	4.4	4.8	5.5	6.3	7.1	7.9	7.8
90°	0.8	2.9	5.1	7.2	9.3	12.4	16.3	20.2	24.2	28.0	27.7
92.5°	14.3	15.8	17.4	19.0	20.6	21.8	22.7	23.7	24.6	25.5	25.6
95°	41.7	43.5	45.3	47.1	48.9	49.9	50.3	50.6	51.0	51.3	51.3
97.5°	76.2	77.8	79.4	81.0	82.5	83.7	84.3	85.0	85.6	86.3	86.3
100°	101.9	103.3	104.7	106.2	107.6	108.6	109.1	109.6	110.2	110.7	110.7
102.5°	128.9	130.0	131.1	132.3	133.4	134.4	135.0	135.7	136.3	137.0	137.2
105°	172.5	173.0	173.6	174.1	174.7	175.1	175.5	175.8	176.2	176.5	176.9
107.5°	216.5	217.3	218.0	218.8	219.6	220.0	220.0	220.0	220.0	220.0	220.1
110°	244.7	245.8	246.8	248.0	249.0	249.5	249.5	249.5	249.5	249.5	249.5



TEST NUMBER: P331776-927

CATALOG NUMBER: S122RDIW-S290D970U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	275.5	276.6	277.7	278.8	279.8	280.3	280.1	280.0	279.9	279.7	279.2
115°	320.9	322.0	323.1	324.2	325.2	325.6	325.2	324.9	324.5	324.2	324.0
117.5°	366.2	367.7	369.1	370.5	371.9	372.1	371.1	370.1	369.2	368.1	367.7
120°	396.4	397.8	399.3	400.7	402.1	402.1	400.7	399.3	397.8	396.4	396.4
122.5°	424.0	425.7	427.4	429.1	430.8	431.2	430.2	429.2	428.2	427.1	426.7
125°	467.0	468.6	470.2	471.8	473.4	474.0	473.4	472.9	472.3	471.8	471.3
127.5°	508.9	510.9	512.9	515.0	517.0	517.7	517.1	516.4	515.8	515.2	514.4
130°	535.2	537.5	539.8	542.2	544.5	545.4	545.1	544.7	544.4	544.0	543.7
132.5°	564.7	566.6	568.5	570.4	572.3	573.2	573.3	573.4	573.5	573.5	572.7
135°	604.2	606.2	608.1	610.1	612.0	613.1	613.5	613.9	614.3	614.6	614.4
137.5°	645.7	647.4	649.0	650.5	652.1	653.2	653.6	654.1	654.6	655.1	654.9
140°	670.7	672.4	674.0	675.6	677.2	678.4	679.4	680.2	681.1	682.0	682.0
142.5°	696.5	698.1	699.7	701.2	702.9	704.0	704.6	705.2	705.8	706.4	706.5
145°	733.3	734.6	735.9	737.1	738.4	739.5	740.6	741.6	742.8	743.8	743.9
147.5°	766.3	767.8	769.3	770.7	772.2	773.3	774.0	774.8	775.5	776.2	776.6
150°	788.7	789.8	790.8	791.9	793.0	793.9	794.6	795.4	796.1	796.8	797.3
152.5°	808.7	809.7	810.8	811.8	812.9	813.9	814.8	815.6	816.4	817.3	817.9
155°	838.4	839.0	839.6	840.1	840.6	841.1	841.7	842.2	842.7	843.3	844.1
157.5°	864.0	864.4	864.7	865.1	865.4	865.8	866.1	866.4	866.7	867.0	868.2
160°	879.4	879.7	880.1	880.4	880.8	881.1	881.3	881.5	881.6	881.8	882.9
162.5°	893.5	893.6	893.7	893.7	893.8	893.9	894.1	894.3	894.5	894.6	895.9
165°	912.3	912.1	912.0	911.7	911.6	911.5	911.5	911.5	911.5	911.5	912.8
167.5°	928.0	927.5	926.9	926.4	925.9	925.6	925.6	925.5	925.5	925.4	926.7
170°	936.4	935.8	935.3	934.8	934.2	933.9	933.7	933.5	933.3	933.2	934.4
172.5°	942.1	941.6	941.0	940.6	940.0	939.6	939.4	939.3	939.1	938.9	940.2
175°	949.2	948.6	948.2	947.6	947.1	946.6	946.3	945.9	945.5	945.2	946.4
177.5°	952.1	951.6	951.3	950.8	950.4	950.0	949.7	949.4	949.2	948.9	949.7
180°	950.8	950.8	950.8	950.8	950.8	950.8	950.8	950.8	950.8	950.8	950.8



TEST NUMBER: P331776-927

CATALOG NUMBER: S122RDIW-S290D970U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	397.7	397.7	397.7	397.7	397.7	397.7	397.7	397.7
2.5°	395.8	396.4	397.0	397.3	397.2	397.0	396.9	396.8
5°	392.6	393.3	394.0	394.3	394.0	393.8	393.6	393.3
7.5°	386.3	386.5	386.7	386.6	386.2	385.7	385.3	384.9
10°	379.9	379.7	379.5	379.1	378.6	378.1	377.6	377.2
12.5°	372.6	372.2	371.8	371.1	370.3	369.6	368.8	368.0
15°	359.0	357.4	355.9	354.8	354.0	353.2	352.4	351.6
17.5°	343.6	341.7	340.0	338.4	337.0	335.6	334.2	332.9
20°	332.9	330.8	328.8	326.9	325.2	323.4	321.7	320.0
22.5°	321.1	318.5	315.9	313.9	312.6	311.3	310.0	308.7
25°	301.5	298.2	294.9	292.7	291.5	290.3	289.1	287.9
27.5°	282.8	279.0	275.2	272.4	270.5	268.5	266.6	264.7
30°	269.7	265.6	261.5	258.4	256.2	254.1	251.9	249.8
32.5°	256.4	251.8	247.1	243.8	241.8	239.7	237.7	235.7
35°	235.8	230.7	225.6	222.2	220.5	218.7	217.0	215.2
37.5°	215.6	210.0	204.5	200.7	198.7	196.6	194.6	192.6
40°	202.1	196.4	190.7	186.8	184.7	182.7	180.5	178.5
42.5°	188.4	182.5	176.7	172.8	170.7	168.7	166.7	164.7
45°	168.6	162.9	157.2	153.4	151.5	149.6	147.7	145.8
47.5°	149.2	143.6	138.0	134.3	132.5	130.8	129.0	127.3
50°	136.9	131.3	125.8	122.2	120.6	118.9	117.2	115.5
52.5°	125.2	119.9	114.5	111.1	109.6	108.0	106.4	104.9
55°	107.3	102.6	97.8	94.6	93.1	91.6	90.1	88.6
57.5°	91.2	86.7	82.4	79.5	78.3	77.0	75.7	74.4
60°	80.0	76.0	71.9	69.2	67.9	66.6	65.4	64.1
62.5°	70.3	66.5	62.6	60.2	59.4	58.7	57.9	57.1
65°	57.2	54.4	51.7	50.2	50.0	49.7	49.5	49.3
67.5°	46.2	44.9	43.6	42.9	42.6	42.4	42.1	41.9
70°	40.2	39.4	38.6	38.0	37.6	37.3	37.0	36.7
72.5°	34.9	34.2	33.6	33.2	33.0	32.8	32.6	32.4
75°	27.6	27.1	26.5	26.2	26.1	26.1	26.0	25.9
77.5°	20.9	20.6	20.3	20.1	20.0	19.8	19.7	19.6
80°	16.6	16.3	16.0	15.8	15.8	15.8	15.8	15.8
82.5°	12.6	12.4	12.2	12.1	12.1	12.1	12.1	12.1
85°	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8
87.5°	7.7	7.5	7.4	7.4	7.4	7.4	7.4	7.4
90°	27.3	27.0	26.6	26.5	26.8	26.9	27.1	27.3
92.5°	25.7	25.7	25.8	25.8	25.9	25.9	26.0	26.0
95°	51.3	51.3	51.3	51.2	50.8	50.5	50.1	49.7
97.5°	86.3	86.3	86.3	86.3	86.3	86.3	86.2	86.2
100°	110.7	110.7	110.7	110.7	110.4	110.3	110.1	110.0
102.5°	137.4	137.4	137.6	137.6	137.4	137.2	137.0	136.9
105°	177.2	177.6	177.9	178.2	178.2	178.2	178.2	178.2
107.5°	220.3	220.5	220.5	220.2	219.4	218.6	217.8	217.0
110°	249.5	249.5	249.5	249.3	248.7	248.2	247.6	247.2



TEST NUMBER: P331776-927

CATALOG NUMBER: S122RDIW-S290D970U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	278.8	278.5	278.0	277.6	277.2	276.8	276.4	276.0
115°	323.8	323.6	323.4	323.1	322.6	322.0	321.5	320.9
117.5°	367.3	366.9	366.4	365.9	365.4	364.9	364.3	363.8
120°	396.4	396.4	396.4	396.1	395.5	395.1	394.5	394.0
122.5°	426.4	425.9	425.5	425.1	424.7	424.3	423.9	423.5
125°	470.7	470.2	469.7	469.3	469.1	469.0	468.7	468.6
127.5°	513.8	513.2	512.5	511.9	511.4	510.8	510.2	509.7
130°	543.3	543.0	542.6	542.0	541.3	540.6	539.9	539.2
132.5°	572.0	571.2	570.4	569.7	569.2	568.5	568.0	567.4
135°	614.3	614.1	613.9	613.5	613.0	612.4	612.0	611.4
137.5°	654.7	654.7	654.5	654.0	653.3	652.6	651.9	651.2
140°	682.0	682.0	682.0	681.7	681.0	680.2	679.5	678.8
142.5°	706.7	706.9	706.9	706.7	706.0	705.3	704.6	703.9
145°	744.2	744.3	744.5	744.3	743.5	742.8	742.1	741.4
147.5°	777.0	777.4	777.8	777.6	777.0	776.3	775.6	774.9
150°	797.8	798.4	798.9	798.9	798.4	797.8	797.3	796.8
152.5°	818.6	819.4	820.0	820.0	819.4	818.6	817.9	817.3
155°	845.1	846.0	846.8	847.0	846.5	846.0	845.4	844.9
157.5°	869.5	870.7	871.9	872.0	871.2	870.4	869.5	868.6
160°	883.9	885.0	886.1	886.3	885.6	884.9	884.2	883.4
162.5°	897.1	898.3	899.5	899.7	898.8	897.9	897.1	896.3
165°	914.0	915.2	916.5	916.6	915.8	914.9	914.0	913.1
167.5°	928.0	929.2	930.4	930.6	929.7	928.8	927.8	926.9
170°	935.6	936.9	938.2	938.3	937.2	936.1	935.0	934.0
172.5°	941.4	942.7	943.9	944.0	942.9	941.9	940.8	939.8
175°	947.7	949.0	950.1	950.3	949.2	948.2	947.1	946.0
177.5°	950.6	951.4	952.3	952.3	951.4	950.6	949.7	948.9
180°	950.8	950.8	950.8	950.8	950.8	950.8	950.8	950.8

(END OF REPORT)