

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331844-927

Luminaire Tested: **S122RDIW-S865D1440U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331844-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S865D1440U927-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1440 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6351.8 lumens
Efficiency: N/A
Efficacy: 82.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 76.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331844-927

CATALOG NUMBER: S122RDIW-S865D1440U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

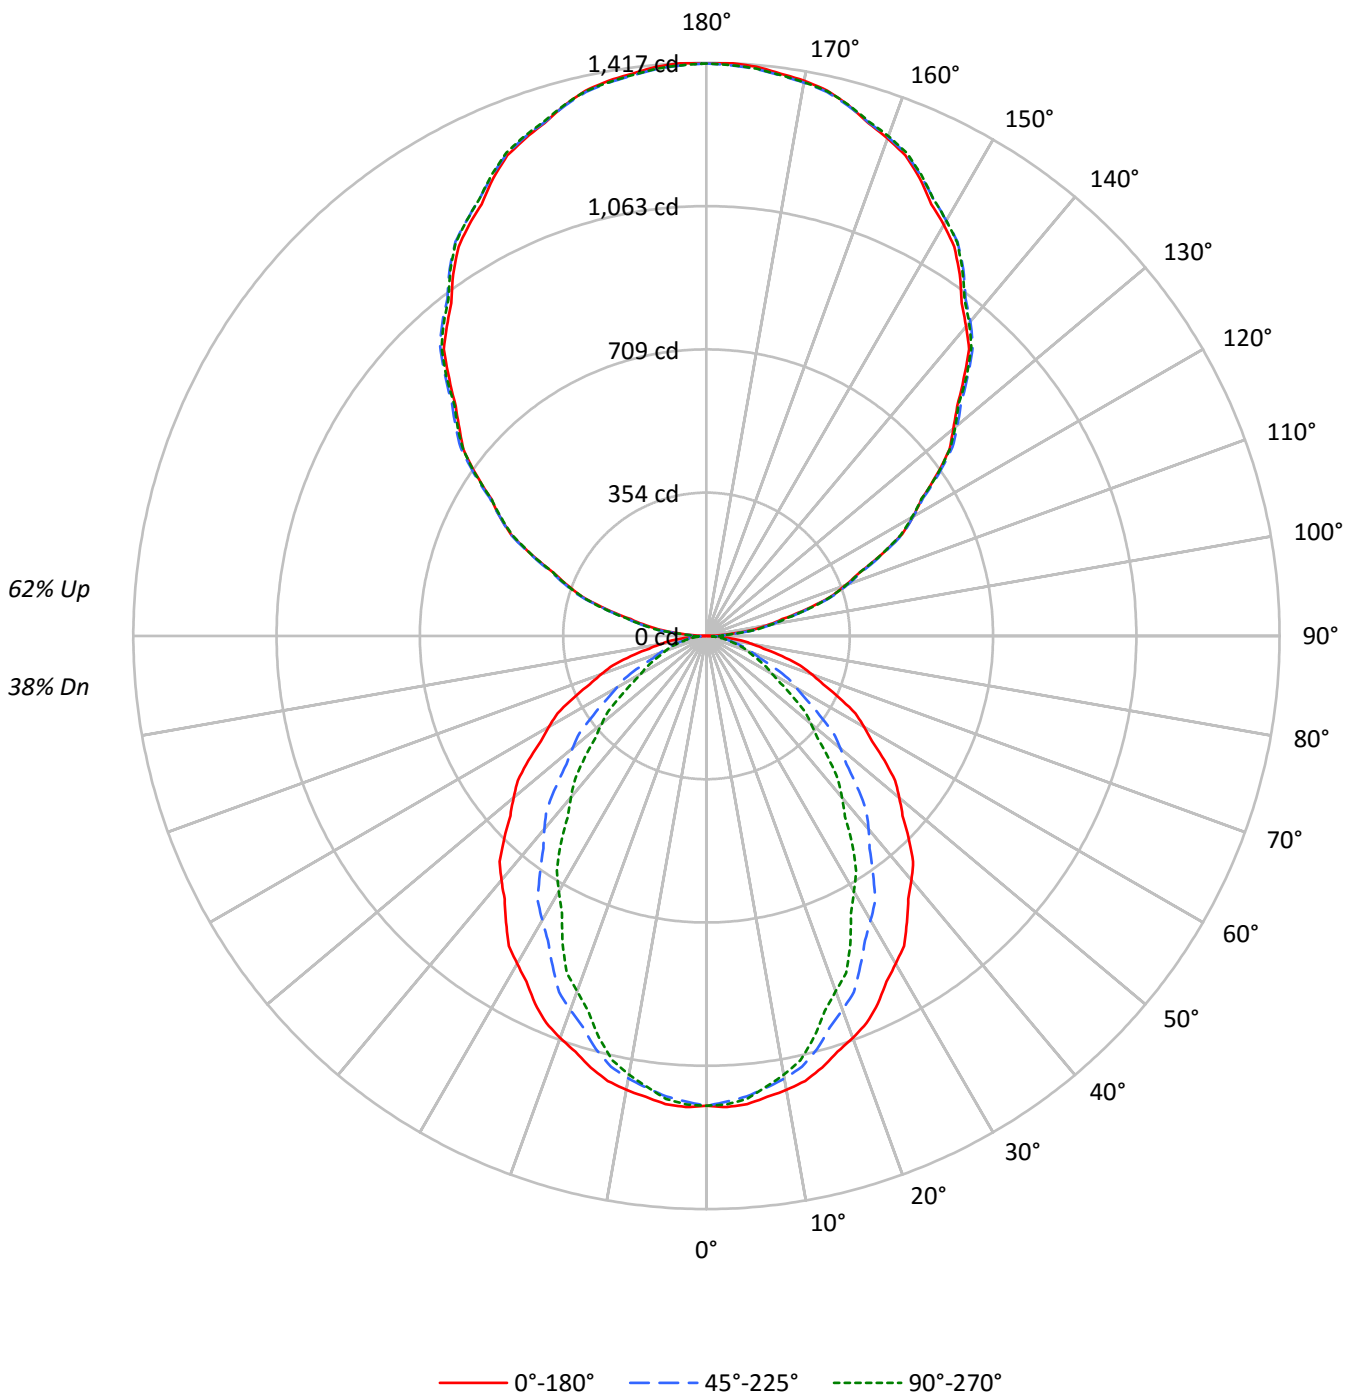



TEST NUMBER: P331844-927

CATALOG NUMBER: S122RDIW-S865D1440U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45	38
1	95	91	88	84	86	83	80	77	67	65	63	53	52	51	40	39	38	32
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33	28
3	80	71	64	58	72	64	58	54	53	48	45	42	39	37	32	30	28	24
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25	21
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22	18
6	62	50	42	37	56	46	39	34	38	33	29	31	27	24	24	21	19	16
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17	15
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16	13
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14	12
10	46	35	28	23	42	32	26	21	27	22	19	22	18	16	17	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	18755	18755	18755
5°	18827	18519	18621
10°	18682	18216	18061
15°	18467	17677	17167
20°	18170	16905	16057
25°	17865	16030	14982
30°	17443	15129	13601
35°	17030	14152	12390
40°	16617	13139	10989
45°	16130	12001	9720
50°	15631	10854	8475
55°	15122	9619	7279
60°	14528	8315	6042
65°	13857	6988	5501
70°	13053	5755	5061
75°	12071	5246	4722
80°	10646	4695	4305
85°	8373	3705	3705



TEST NUMBER: P331844-927

CATALOG NUMBER: S122RDIW-S865D1440U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	108.7	1.7
10°-20°	298.5	4.7
20°-30°	419.2	6.6
30°-40°	457.1	7.2
40°-50°	420.3	6.6
50°-60°	330.1	5.2
60°-70°	215.2	3.4
70°-80°	111.0	1.7
80°-90°	34.4	0.5
90°-100°	89.7	1.4
100°-110°	278.5	4.4
110°-120°	476.1	7.5
120°-130°	626.1	9.9
130°-140°	702.7	11.1
140°-150°	689.0	10.8
150°-160°	577.9	9.1
160°-170°	383.3	6.0
170°-180°	134.0	2.1
0°-30°	826.5	13.0
0°-40°	1283.6	20.2
0°-60°	2034.0	32.0
0°-90°	2394.7	37.7
90°-120°	844.3	13.3
90°-150°	2862.0	45.1
90°-180°	3957.0	62.3
0°-180°	6351.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1162	1162	1162	1162	1162	
5°	1162	1156	1143	1151	1149	110
15°	1105	1092	1058	1038	1027	311
25°	1003	967	900	858	841	461
35°	864	808	718	654	629	541
45°	706	634	526	454	426	545
55°	537	453	342	281	259	480
65°	363	277	183	149	144	359
75°	194	122	84	77	76	205
85°	45	24	20	20	20	53
90°	1	16	42	40	41	5
95°	62	74	76	76	74	71
105°	257	260	263	265	265	271
115°	478	484	482	481	478	472
125°	695	705	702	699	697	621
135°	899	912	915	914	910	694
145°	1092	1100	1107	1108	1104	682
155°	1248	1252	1255	1261	1258	574
165°	1358	1357	1357	1364	1359	383
175°	1413	1409	1407	1414	1408	134
180°	1415	1415	1415	1415	1415	



TEST NUMBER: P331844-927

CATALOG NUMBER: S122RDIW-S865D1440U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6
2.5°	1165.8	1164.8	1163.9	1162.9	1162.1	1160.5	1158.5	1156.4	1154.4	1152.3	1154.2
5°	1161.6	1160.4	1159.2	1158.0	1156.9	1154.8	1151.8	1148.7	1145.7	1142.6	1144.7
7.5°	1149.5	1148.1	1146.7	1145.3	1143.8	1141.3	1137.7	1134.2	1130.6	1127.0	1127.7
10°	1139.5	1137.8	1136.2	1134.6	1132.9	1129.8	1125.1	1120.5	1115.8	1111.1	1110.4
12.5°	1126.9	1124.8	1122.8	1120.9	1118.8	1114.8	1108.8	1102.9	1096.9	1090.9	1089.6
15°	1104.8	1102.2	1099.6	1097.1	1094.5	1089.3	1081.3	1073.4	1065.4	1057.5	1053.0
17.5°	1077.7	1073.7	1069.8	1065.9	1062.0	1054.9	1044.7	1034.5	1024.4	1014.2	1008.9
20°	1057.5	1052.8	1048.1	1043.5	1038.8	1030.6	1018.9	1007.3	995.6	983.9	978.0
22.5°	1035.6	1030.4	1025.2	1019.9	1014.7	1005.5	992.3	979.1	966.0	952.8	945.2
25°	1002.8	995.4	987.9	980.4	973.0	961.5	946.0	930.7	915.2	899.8	890.3
27.5°	963.3	955.1	947.1	938.9	930.8	918.1	900.6	883.3	865.9	848.5	837.3
30°	935.6	926.7	917.8	908.9	900.1	886.3	867.6	848.9	830.2	811.5	799.6
32.5°	908.6	898.3	887.9	877.5	867.1	852.5	833.4	814.3	795.3	776.2	762.6
35°	864.0	852.2	840.3	828.3	816.4	800.2	779.6	759.1	738.6	718.0	703.2
37.5°	819.5	806.4	793.4	780.2	767.1	749.6	727.8	705.8	684.0	662.0	645.8
40°	788.4	774.4	760.3	746.3	732.3	714.0	691.3	668.7	646.0	623.4	606.7
42.5°	756.5	741.6	726.9	712.2	697.4	678.3	654.9	631.4	608.1	584.6	567.5
45°	706.4	690.7	675.1	659.4	643.8	623.7	599.2	574.6	550.1	525.6	509.0
47.5°	657.6	641.0	624.5	607.8	591.3	570.3	545.0	519.7	494.3	469.1	452.6
50°	622.3	605.7	589.1	572.5	556.0	534.8	509.1	483.4	457.7	432.1	415.9
52.5°	587.8	570.5	553.2	535.8	518.5	497.3	472.1	446.9	421.8	396.7	381.1
55°	537.2	519.0	500.7	482.5	464.3	442.5	417.3	392.1	366.9	341.7	327.6
57.5°	485.2	466.5	447.8	429.1	410.5	389.0	364.7	340.5	316.2	292.0	279.2
60°	449.9	431.2	412.6	393.9	375.2	353.8	329.7	305.6	281.6	257.5	245.7
62.5°	415.4	396.7	378.0	359.3	340.6	319.9	296.9	274.0	251.0	228.1	216.7
65°	362.7	343.7	324.8	305.9	287.0	267.0	246.0	225.0	203.9	182.9	175.0
67.5°	311.8	293.0	274.3	255.4	236.6	217.8	198.9	180.0	161.1	142.1	138.5
70°	276.5	258.3	240.0	221.8	203.6	186.4	170.3	154.2	138.1	121.9	119.6
72.5°	242.8	225.4	207.9	190.4	172.9	157.7	144.8	131.8	118.9	106.0	104.0
75°	193.5	177.1	160.7	144.3	128.0	115.9	107.9	100.0	92.1	84.1	82.5
77.5°	144.9	130.5	116.1	101.8	87.5	78.4	74.5	70.7	66.9	63.1	62.1
80°	114.5	102.7	90.8	78.8	66.9	59.8	57.4	55.1	52.8	50.5	49.5
82.5°	86.8	77.6	68.2	58.9	49.7	44.2	42.6	41.0	39.5	37.9	37.3
85°	45.2	40.3	35.4	30.5	25.6	22.8	22.1	21.4	20.7	20.0	20.0
87.5°	13.7	12.8	12.0	11.1	10.3	10.4	11.6	12.8	13.9	15.1	14.8
90°	1.2	4.4	7.5	10.8	13.9	18.5	24.3	30.1	36.0	41.8	41.3
92.5°	21.2	23.6	25.9	28.3	30.6	32.5	33.8	35.3	36.6	37.9	38.1
95°	62.1	64.7	67.4	70.0	72.7	74.3	74.9	75.3	75.9	76.4	76.4
97.5°	113.4	115.8	118.1	120.5	122.8	124.5	125.5	126.5	127.5	128.5	128.5
100°	151.7	153.8	155.9	158.0	160.2	161.6	162.4	163.2	164.0	164.8	164.8
102.5°	191.8	193.5	195.2	196.9	198.6	199.9	201.0	201.9	203.0	204.0	204.2
105°	256.7	257.5	258.3	259.1	259.9	260.6	261.2	261.7	262.2	262.8	263.2
107.5°	322.2	323.4	324.6	325.7	326.9	327.5	327.5	327.5	327.5	327.5	327.6
110°	364.2	365.8	367.4	369.0	370.6	371.5	371.5	371.5	371.5	371.5	371.5



TEST NUMBER: P331844-927

CATALOG NUMBER: S122RDIW-S865D1440U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	410.1	411.7	413.3	414.9	416.5	417.2	416.9	416.8	416.5	416.3	415.7
115°	477.7	479.3	480.9	482.5	484.1	484.6	484.1	483.5	483.0	482.5	482.2
117.5°	545.1	547.2	549.3	551.4	553.6	553.9	552.4	550.9	549.4	548.0	547.3
120°	589.9	592.1	594.2	596.4	598.5	598.5	596.4	594.2	592.1	589.9	589.9
122.5°	631.1	633.6	636.1	638.7	641.3	641.7	640.3	638.8	637.3	635.8	635.2
125°	695.1	697.4	699.8	702.2	704.6	705.4	704.6	703.9	703.1	702.2	701.4
127.5°	757.4	760.4	763.4	766.5	769.5	770.6	769.6	768.7	767.7	766.8	765.7
130°	796.5	800.0	803.5	806.9	810.4	811.8	811.3	810.8	810.2	809.7	809.2
132.5°	840.5	843.4	846.1	849.0	851.8	853.3	853.3	853.4	853.6	853.7	852.5
135°	899.3	902.2	905.1	908.0	910.9	912.7	913.2	913.8	914.3	914.8	914.6
137.5°	961.2	963.5	965.9	968.3	970.7	972.2	973.0	973.6	974.3	975.0	974.8
140°	998.4	1000.8	1003.2	1005.6	1008.0	1009.8	1011.1	1012.5	1013.8	1015.1	1015.1
142.5°	1036.6	1039.0	1041.4	1043.8	1046.2	1047.8	1048.7	1049.6	1050.5	1051.5	1051.6
145°	1091.5	1093.4	1095.3	1097.1	1099.0	1100.7	1102.3	1103.9	1105.5	1107.1	1107.3
147.5°	1140.5	1142.7	1144.9	1147.2	1149.5	1151.1	1152.1	1153.2	1154.3	1155.3	1156.0
150°	1173.9	1175.5	1177.2	1178.8	1180.4	1181.6	1182.7	1183.8	1184.9	1185.9	1186.7
152.5°	1203.6	1205.1	1206.7	1208.3	1210.0	1211.4	1212.7	1213.9	1215.2	1216.5	1217.5
155°	1248.0	1248.8	1249.6	1250.4	1251.2	1252.0	1252.8	1253.5	1254.3	1255.1	1256.5
157.5°	1285.9	1286.5	1287.1	1287.6	1288.1	1288.6	1289.1	1289.6	1290.1	1290.5	1292.3
160°	1308.9	1309.5	1310.0	1310.5	1311.1	1311.5	1311.7	1311.9	1312.2	1312.5	1314.1
162.5°	1329.9	1330.1	1330.2	1330.2	1330.4	1330.5	1330.8	1331.1	1331.3	1331.6	1333.4
165°	1357.9	1357.6	1357.3	1357.1	1356.8	1356.7	1356.7	1356.7	1356.7	1356.7	1358.5
167.5°	1381.2	1380.5	1379.7	1378.9	1378.1	1377.7	1377.6	1377.6	1377.5	1377.4	1379.3
170°	1393.7	1392.9	1392.1	1391.3	1390.5	1390.0	1389.7	1389.5	1389.2	1388.9	1390.8
172.5°	1402.3	1401.5	1400.7	1399.9	1399.2	1398.6	1398.4	1398.0	1397.8	1397.5	1399.4
175°	1412.8	1412.0	1411.2	1410.4	1409.6	1409.0	1408.4	1407.9	1407.4	1406.8	1408.7
177.5°	1417.1	1416.5	1415.9	1415.2	1414.6	1414.0	1413.6	1413.2	1412.8	1412.3	1413.6
180°	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2



TEST NUMBER: P331844-927

CATALOG NUMBER: S122RDIW-S865D1440U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6	1161.6
2.5°	1156.0	1157.9	1159.8	1160.5	1160.2	1159.8	1159.4	1159.0
5°	1146.8	1148.9	1151.0	1151.8	1151.0	1150.3	1149.6	1148.9
7.5°	1128.3	1128.9	1129.5	1129.2	1128.0	1126.8	1125.5	1124.3
10°	1109.7	1109.0	1108.3	1107.2	1105.8	1104.5	1103.0	1101.6
12.5°	1088.4	1087.1	1085.8	1084.1	1081.7	1079.4	1077.1	1074.8
15°	1048.6	1044.2	1039.7	1036.3	1034.0	1031.7	1029.4	1027.0
17.5°	1003.6	998.3	993.1	988.4	984.4	980.4	976.4	972.3
20°	972.2	966.4	960.5	955.1	949.9	944.8	939.6	934.5
22.5°	937.8	930.3	922.7	917.0	913.2	909.3	905.5	901.7
25°	880.7	871.1	861.5	854.9	851.4	848.0	844.5	841.0
27.5°	826.2	815.0	803.8	795.5	790.0	784.3	778.8	773.2
30°	787.7	775.8	763.8	754.7	748.5	742.1	735.9	729.5
32.5°	749.0	735.4	721.8	712.0	706.2	700.2	694.3	688.3
35°	688.5	673.8	659.1	649.2	644.0	638.9	633.7	628.6
37.5°	629.6	613.4	597.2	586.1	580.3	574.3	568.5	562.6
40°	590.2	573.6	557.0	545.7	539.6	533.5	527.4	521.4
42.5°	550.4	533.2	516.1	504.5	498.7	492.8	486.9	481.0
45°	492.4	475.9	459.2	448.1	442.5	437.0	431.3	425.7
47.5°	436.0	419.5	403.1	392.3	387.2	382.1	377.0	371.9
50°	399.8	383.7	367.6	357.0	352.1	347.2	342.3	337.4
52.5°	365.6	350.1	334.5	324.5	319.9	315.4	310.9	306.3
55°	313.6	299.6	285.6	276.3	271.9	267.4	263.0	258.6
57.5°	266.3	253.5	240.7	232.3	228.6	224.8	221.1	217.4
60°	233.7	221.8	209.8	202.1	198.3	194.6	190.8	187.1
62.5°	205.4	194.1	182.7	175.9	173.6	171.4	169.1	166.9
65°	167.0	159.1	151.1	146.8	146.1	145.4	144.7	144.0
67.5°	134.8	131.2	127.5	125.3	124.6	123.8	123.1	122.4
70°	117.2	114.9	112.6	111.0	110.0	109.1	108.1	107.2
72.5°	102.0	100.1	98.1	96.9	96.3	95.7	95.1	94.6
75°	80.8	79.2	77.6	76.6	76.4	76.1	75.9	75.7
77.5°	61.2	60.3	59.3	58.7	58.3	57.9	57.6	57.2
80°	48.6	47.7	46.7	46.3	46.3	46.3	46.3	46.3
82.5°	36.8	36.1	35.6	35.3	35.3	35.3	35.3	35.3
85°	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
87.5°	14.5	14.2	13.9	13.8	13.9	13.9	13.9	14.0
90°	40.7	40.2	39.7	39.5	39.8	40.1	40.3	40.6
92.5°	38.2	38.3	38.4	38.5	38.5	38.6	38.7	38.7
95°	76.4	76.4	76.4	76.1	75.7	75.1	74.5	74.1
97.5°	128.5	128.5	128.5	128.5	128.4	128.3	128.3	128.3
100°	164.8	164.8	164.8	164.7	164.4	164.1	163.9	163.6
102.5°	204.4	204.6	204.9	204.8	204.5	204.3	204.0	203.7
105°	263.8	264.4	264.8	265.1	265.1	265.1	265.1	265.1
107.5°	327.9	328.1	328.3	327.8	326.6	325.3	324.2	322.9
110°	371.5	371.5	371.5	371.0	370.2	369.4	368.6	367.8



TEST NUMBER: P331844-927

CATALOG NUMBER: S122RDIW-S865D1440U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	415.0	414.4	413.8	413.1	412.6	412.0	411.4	410.8
115°	482.0	481.6	481.4	480.9	480.1	479.3	478.5	477.7
117.5°	546.7	546.1	545.4	544.6	543.8	543.0	542.2	541.5
120°	589.9	589.9	589.9	589.5	588.7	588.0	587.2	586.4
122.5°	634.5	633.9	633.3	632.6	632.1	631.5	630.9	630.3
125°	700.6	699.8	699.0	698.5	698.2	698.0	697.8	697.4
127.5°	764.8	763.8	762.9	762.0	761.1	760.3	759.5	758.6
130°	808.7	808.1	807.6	806.8	805.7	804.7	803.6	802.6
132.5°	851.4	850.2	849.0	848.0	847.2	846.3	845.4	844.5
135°	914.3	914.0	913.8	913.2	912.4	911.6	910.9	910.1
137.5°	974.5	974.4	974.1	973.5	972.5	971.4	970.3	969.2
140°	1015.1	1015.1	1015.1	1014.6	1013.5	1012.5	1011.4	1010.3
142.5°	1051.9	1052.1	1052.3	1051.9	1050.8	1049.7	1048.7	1047.6
145°	1107.6	1107.9	1108.1	1107.7	1106.7	1105.6	1104.5	1103.5
147.5°	1156.5	1157.1	1157.7	1157.5	1156.4	1155.4	1154.4	1153.4
150°	1187.5	1188.3	1189.1	1189.1	1188.3	1187.5	1186.7	1185.9
152.5°	1218.5	1219.5	1220.5	1220.5	1219.5	1218.5	1217.5	1216.5
155°	1257.8	1259.2	1260.4	1260.8	1260.0	1259.2	1258.4	1257.6
157.5°	1294.1	1295.9	1297.8	1298.0	1296.7	1295.5	1294.2	1292.9
160°	1315.7	1317.2	1318.8	1319.1	1318.0	1317.0	1316.0	1314.9
162.5°	1335.2	1337.0	1338.8	1339.1	1337.8	1336.6	1335.3	1334.0
165°	1360.4	1362.2	1364.1	1364.4	1363.0	1361.8	1360.4	1359.1
167.5°	1381.2	1383.1	1384.9	1385.1	1383.8	1382.4	1381.0	1379.6
170°	1392.7	1394.5	1396.4	1396.5	1394.9	1393.3	1391.7	1390.1
172.5°	1401.2	1403.1	1404.9	1405.1	1403.5	1401.9	1400.3	1398.8
175°	1410.6	1412.4	1414.3	1414.4	1412.8	1411.2	1409.6	1408.0
177.5°	1414.9	1416.2	1417.5	1417.5	1416.2	1414.9	1413.6	1412.3
180°	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2

(END OF REPORT)