

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331613-830

Luminaire Tested: **S122DIW-S1005D1440U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331613-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIW-S1005D1440U830-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1440 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9255.6 lumens  
Efficiency: N/A  
Efficacy: 111.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 82.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331613-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

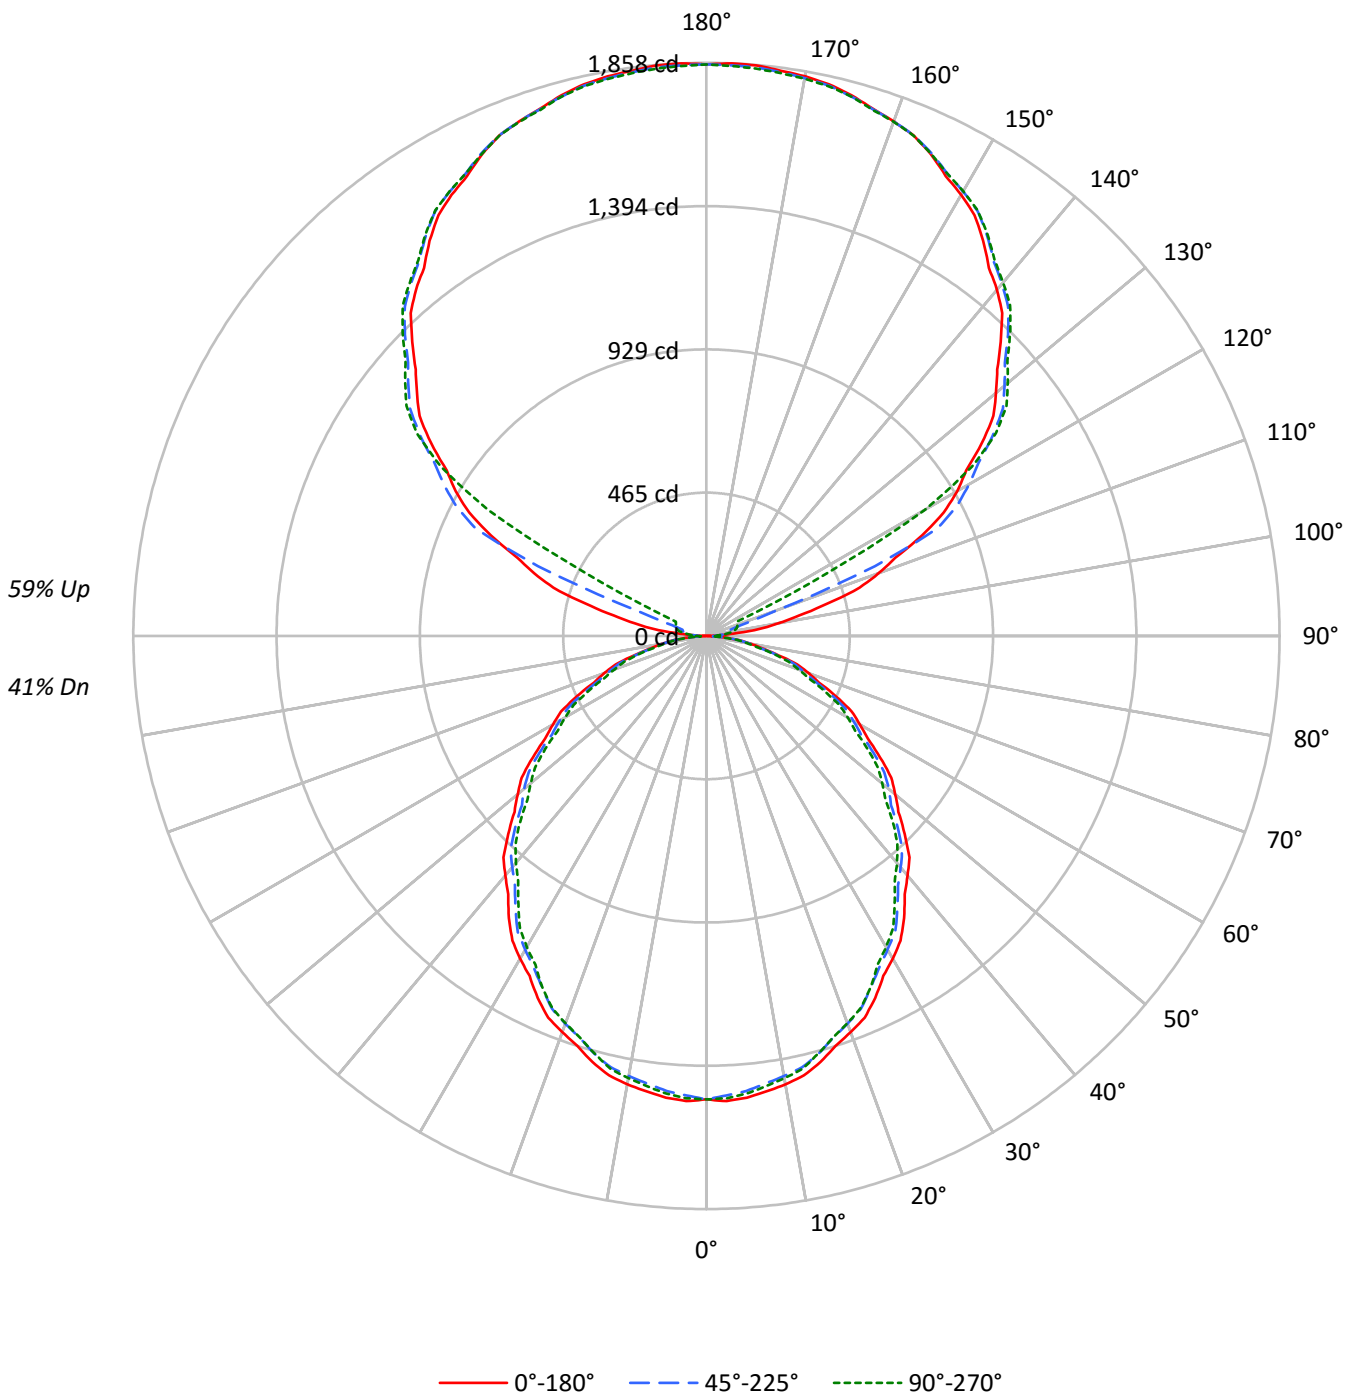



TEST NUMBER: P331613-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	48	48	48	41
1	96	92	88	84	87	84	80	77	69	66	64	55	54	52	43	42	41	35
2	87	80	74	69	79	73	68	63	60	57	53	48	46	44	37	36	34	29
3	80	70	63	57	72	64	58	53	53	49	45	43	40	37	33	31	29	25
4	73	62	54	48	66	57	50	45	47	42	38	38	34	32	30	27	25	21
5	67	55	47	41	61	51	44	38	42	37	33	34	30	27	27	24	22	18
6	61	50	42	36	56	46	38	33	38	33	29	31	27	24	24	21	19	16
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17	14
8	53	40	33	28	48	37	31	26	31	26	22	26	22	19	20	17	15	13
9	49	37	30	25	45	34	27	23	29	24	20	24	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	24254	24254	24254
5°	24347	23995	24136
10°	24202	23753	23871
15°	23903	23445	23422
20°	23479	22983	22957
25°	23058	22413	22413
30°	22514	21893	21705
35°	22007	21268	20954
40°	21372	20643	20244
45°	20747	20021	19527
50°	20065	19376	18686
55°	19356	18624	17931
60°	18564	17725	17073
65°	17712	16829	16061
70°	16636	15753	15002
75°	15140	14504	14148
80°	13436	13036	12357
85°	10967	10448	9355



TEST NUMBER: P331613-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	141.3	1.5
10°-20°	397.5	4.3
20°-30°	584.2	6.3
30°-40°	678.6	7.3
40°-50°	677.9	7.3
50°-60°	591.2	6.4
60°-70°	437.1	4.7
70°-80°	247.6	2.7
80°-90°	71.1	0.8
90°-100°	61.8	0.7
100°-110°	226.6	2.4
110°-120°	605.8	6.5
120°-130°	1000.0	10.8
130°-140°	1063.4	11.5
140°-150°	988.4	10.7
150°-160°	794.7	8.6
160°-170°	512.1	5.5
170°-180°	176.3	1.9
0°-30°	1123.0	12.1
0°-40°	1801.6	19.5
0°-60°	3070.7	33.2
0°-90°	3826.5	41.3
90°-120°	894.2	9.7
90°-150°	3946.0	42.6
90°-180°	5429.0	58.7
0°-180°	9255.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1502	1502	1502	1502	1502	
5°	1502	1496	1480	1491	1489	142
15°	1430	1421	1403	1408	1401	402
25°	1294	1282	1258	1261	1258	595
35°	1116	1102	1079	1070	1063	697
45°	909	898	877	862	855	701
55°	688	678	662	645	637	615
65°	464	455	440	428	420	458
75°	243	240	232	225	227	259
85°	59	58	56	52	50	68
90°	1	16	27	33	36	7
95°	87	46	52	58	58	107
105°	408	425	82	96	102	435
115°	771	794	827	236	110	759
125°	1090	1108	1133	1142	1146	971
135°	1349	1369	1382	1395	1393	1041
145°	1564	1564	1586	1594	1589	978
155°	1723	1712	1726	1734	1724	793
165°	1815	1808	1811	1819	1811	513
175°	1857	1848	1850	1858	1846	177
180°	1853	1853	1853	1853	1853	



TEST NUMBER: P331613-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2
2.5°	1509.2	1507.9	1506.7	1505.3	1504.0	1502.0	1499.2	1496.4	1493.6	1490.7	1493.3
5°	1502.2	1501.0	1499.7	1498.4	1497.1	1494.7	1491.2	1487.6	1484.1	1480.5	1483.2
7.5°	1488.9	1487.0	1485.0	1483.0	1481.0	1478.2	1474.6	1471.0	1467.4	1463.9	1466.4
10°	1476.2	1474.0	1471.8	1469.5	1467.3	1464.2	1460.4	1456.5	1452.6	1448.8	1451.4
12.5°	1459.0	1456.9	1454.9	1452.9	1451.0	1448.0	1444.2	1440.3	1436.5	1432.7	1434.5
15°	1430.0	1428.1	1426.2	1424.3	1422.3	1419.3	1415.1	1410.9	1406.7	1402.6	1403.9
17.5°	1393.1	1391.1	1389.2	1387.2	1385.3	1382.2	1378.0	1373.8	1369.5	1365.4	1366.8
20°	1366.5	1364.5	1362.6	1360.7	1358.8	1355.6	1351.0	1346.6	1342.1	1337.6	1338.5
22.5°	1339.9	1337.2	1334.5	1331.8	1329.1	1325.7	1321.4	1317.2	1313.0	1308.7	1308.9
25°	1294.3	1291.7	1289.1	1286.6	1284.0	1280.0	1274.5	1269.0	1263.6	1258.1	1258.8
27.5°	1242.3	1239.9	1237.7	1235.3	1233.0	1229.7	1225.4	1221.1	1216.8	1212.5	1211.5
30°	1207.6	1205.0	1202.4	1199.9	1197.3	1193.6	1188.8	1184.0	1179.2	1174.3	1173.4
32.5°	1170.6	1168.6	1166.5	1164.4	1162.3	1158.9	1153.8	1148.7	1143.6	1138.5	1136.8
35°	1116.5	1113.3	1110.1	1106.9	1103.7	1099.6	1094.4	1089.3	1084.2	1079.0	1077.1
37.5°	1055.6	1052.8	1050.0	1047.2	1044.3	1040.4	1035.2	1030.1	1024.9	1019.8	1017.4
40°	1014.0	1011.4	1008.9	1006.4	1003.7	999.9	994.8	989.7	984.5	979.4	976.5
42.5°	973.6	971.0	968.5	965.9	963.3	959.4	954.3	949.1	944.1	938.9	935.8
45°	908.6	906.3	904.1	901.8	899.6	896.1	891.3	886.5	881.7	876.8	873.3
47.5°	843.9	841.8	839.6	837.5	835.4	831.8	826.8	821.8	816.8	811.8	808.0
50°	798.8	797.2	795.6	794.0	792.4	789.3	784.9	780.3	775.8	771.4	766.9
52.5°	754.9	752.8	750.6	748.6	746.4	743.2	739.0	734.7	730.6	726.3	722.6
55°	687.6	685.6	683.7	681.8	679.9	676.9	673.2	669.3	665.4	661.6	657.7
57.5°	620.0	618.4	616.9	615.4	613.8	611.0	606.7	602.5	598.2	594.0	590.2
60°	574.9	573.6	572.3	571.1	569.8	566.8	562.4	557.9	553.4	548.9	545.4
62.5°	531.0	529.0	526.9	524.8	522.7	520.0	516.5	513.1	509.6	506.1	502.8
65°	463.6	461.8	459.9	457.9	456.0	453.4	450.2	447.0	443.7	440.5	437.7
67.5°	395.2	393.7	392.1	390.6	389.1	386.8	383.9	381.1	378.1	375.3	373.1
70°	352.4	351.2	349.9	348.6	347.3	345.3	342.3	339.4	336.6	333.7	331.4
72.5°	308.5	307.3	305.9	304.7	303.4	301.8	300.0	298.1	296.2	294.4	292.1
75°	242.7	242.0	241.4	240.7	240.1	238.9	237.3	235.7	234.1	232.5	230.6
77.5°	183.7	182.7	181.5	180.5	179.4	178.5	177.9	177.2	176.5	176.0	174.9
80°	144.5	144.1	143.8	143.5	143.2	142.7	142.0	141.4	140.7	140.2	139.1
82.5°	107.4	107.4	107.4	107.3	107.2	107.0	106.6	106.2	105.8	105.5	104.2
85°	59.2	58.9	58.6	58.2	58.0	57.6	57.3	56.9	56.6	56.4	55.3
87.5°	21.1	21.2	21.4	21.5	21.7	21.7	21.7	21.6	21.6	21.6	21.1
90°	1.3	4.6	7.9	11.2	14.4	17.2	19.7	22.1	24.4	26.8	28.3
92.5°	27.1	26.8	26.5	26.2	25.9	26.3	27.5	28.7	29.9	31.1	31.9
95°	87.1	77.3	67.5	57.7	47.8	43.9	46.0	48.1	50.2	52.3	53.7
97.5°	173.0	145.2	117.5	89.8	62.1	50.7	55.5	60.3	65.1	69.9	71.2
100°	237.2	196.4	155.6	114.8	74.0	56.2	61.2	66.3	71.4	76.4	78.8
102.5°	308.0	299.4	290.8	282.1	273.5	248.0	205.7	163.2	120.9	78.5	81.6
105°	407.6	416.4	425.4	434.3	443.3	407.1	325.7	244.4	163.1	81.8	85.0
107.5°	520.9	528.1	535.4	542.5	549.8	504.6	407.1	309.5	212.0	114.5	111.1
110°	593.9	600.1	606.3	612.7	618.9	578.9	492.9	406.8	320.7	234.6	204.8



TEST NUMBER: P331613-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	662.5	668.0	673.5	679.1	684.7	676.7	655.5	634.2	612.9	591.7	483.1
115°	770.8	775.9	780.9	786.0	791.1	797.3	804.7	812.2	819.6	827.1	689.2
117.5°	867.6	873.3	878.9	884.6	890.2	895.6	900.7	905.9	911.0	916.2	882.8
120°	938.4	942.8	947.3	951.8	956.2	961.1	966.5	971.9	977.2	982.6	986.2
122.5°	998.4	1003.1	1007.9	1012.6	1017.3	1022.6	1028.3	1034.2	1040.0	1045.8	1048.0
125°	1089.9	1093.7	1097.6	1101.5	1105.3	1110.1	1115.8	1121.4	1127.1	1132.7	1134.8
127.5°	1172.7	1177.0	1181.3	1185.5	1189.9	1194.1	1198.3	1202.6	1206.8	1211.1	1214.1
130°	1225.2	1230.0	1234.7	1239.5	1244.3	1248.3	1251.6	1254.9	1258.1	1261.4	1264.7
132.5°	1278.8	1282.9	1286.9	1291.0	1295.1	1298.7	1302.0	1305.2	1308.5	1311.8	1314.7
135°	1348.6	1353.3	1358.1	1362.8	1367.6	1371.3	1374.0	1376.7	1379.4	1382.1	1385.1
137.5°	1419.1	1422.4	1425.8	1429.1	1432.4	1435.6	1438.6	1441.7	1444.7	1447.7	1450.7
140°	1465.2	1467.5	1470.0	1472.3	1474.7	1477.5	1480.8	1484.1	1487.4	1490.6	1493.4
142.5°	1503.8	1505.9	1508.1	1510.2	1512.4	1515.3	1519.1	1522.9	1526.5	1530.3	1532.8
145°	1564.4	1564.1	1563.8	1563.5	1563.2	1565.6	1570.7	1575.7	1580.7	1585.8	1587.9
147.5°	1617.2	1616.1	1615.0	1613.8	1612.7	1614.6	1619.6	1624.7	1629.7	1634.7	1636.2
150°	1651.5	1649.4	1647.4	1645.3	1643.1	1644.5	1649.3	1654.1	1658.8	1663.6	1665.4
152.5°	1680.5	1678.2	1675.8	1673.5	1671.2	1672.3	1676.8	1681.3	1685.8	1690.4	1692.1
155°	1722.6	1719.9	1717.2	1714.5	1711.8	1712.3	1715.9	1719.5	1723.1	1726.5	1728.3
157.5°	1755.6	1753.3	1751.1	1748.8	1746.5	1746.6	1749.1	1751.6	1754.1	1756.6	1758.7
160°	1774.8	1773.0	1771.3	1769.5	1767.7	1767.7	1769.5	1771.3	1773.0	1774.8	1776.6
162.5°	1792.0	1790.3	1788.5	1786.7	1784.9	1784.7	1786.3	1787.8	1789.4	1790.9	1793.0
165°	1815.1	1813.3	1811.5	1809.7	1807.9	1807.5	1808.4	1809.2	1810.2	1811.0	1813.2
167.5°	1832.2	1830.4	1828.6	1826.8	1825.0	1824.6	1825.4	1826.3	1827.1	1828.0	1830.0
170°	1841.9	1840.1	1838.3	1836.5	1834.8	1834.1	1834.8	1835.3	1835.9	1836.5	1838.6
172.5°	1848.3	1846.5	1844.7	1843.0	1841.2	1840.6	1841.2	1841.7	1842.4	1843.0	1845.0
175°	1856.6	1854.5	1852.5	1850.4	1848.3	1847.6	1848.1	1848.7	1849.4	1849.9	1852.0
177.5°	1857.9	1856.3	1854.6	1852.9	1851.2	1850.6	1850.8	1851.1	1851.2	1851.5	1853.2
180°	1852.6	1852.6	1852.6	1852.6	1852.6	1852.6	1852.6	1852.6	1852.6	1852.6	1852.6



TEST NUMBER: P331613-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2
2.5°	1495.8	1498.4	1501.0	1502.0	1501.5	1501.0	1500.4	1500.0
5°	1485.7	1488.3	1490.8	1491.9	1491.2	1490.5	1489.9	1489.2
7.5°	1469.0	1471.5	1474.1	1475.1	1474.3	1473.7	1472.9	1472.3
10°	1454.0	1456.5	1459.1	1459.9	1459.0	1457.9	1457.0	1456.0
12.5°	1436.2	1438.0	1439.8	1440.4	1439.6	1439.0	1438.2	1437.6
15°	1405.1	1406.5	1407.7	1407.6	1406.0	1404.4	1402.8	1401.2
17.5°	1368.3	1369.8	1371.2	1371.2	1369.6	1368.1	1366.6	1365.0
20°	1339.5	1340.5	1341.4	1341.2	1340.0	1338.7	1337.5	1336.1
22.5°	1309.1	1309.3	1309.5	1309.2	1308.4	1307.7	1306.8	1306.1
25°	1259.4	1260.1	1260.7	1260.7	1260.1	1259.4	1258.8	1258.1
27.5°	1210.6	1209.6	1208.6	1207.4	1205.9	1204.3	1202.8	1201.3
30°	1172.4	1171.5	1170.5	1169.4	1168.1	1166.8	1165.5	1164.2
32.5°	1135.1	1133.3	1131.6	1130.1	1128.8	1127.6	1126.2	1124.9
35°	1075.2	1073.3	1071.3	1069.6	1068.0	1066.4	1064.7	1063.1
37.5°	1015.0	1012.7	1010.3	1008.3	1006.8	1005.2	1003.7	1002.2
40°	973.6	970.7	967.8	965.7	964.4	963.2	961.9	960.5
42.5°	932.6	929.4	926.3	923.9	922.1	920.3	918.5	916.6
45°	869.8	866.2	862.7	860.3	858.9	857.7	856.4	855.2
47.5°	804.4	800.6	796.9	794.1	792.2	790.4	788.5	786.6
50°	762.3	757.9	753.4	750.4	748.8	747.2	745.6	743.9
52.5°	718.9	715.1	711.4	708.5	706.3	704.3	702.1	700.0
55°	653.8	650.0	646.2	643.5	641.9	640.3	638.7	637.0
57.5°	586.4	582.6	578.8	576.3	575.1	573.9	572.7	571.5
60°	541.9	538.3	534.8	532.5	531.6	530.7	529.6	528.7
62.5°	499.6	496.3	493.0	490.8	489.6	488.3	487.1	485.9
65°	434.8	431.9	429.0	426.8	425.2	423.6	422.0	420.4
67.5°	370.8	368.5	366.3	364.5	363.3	361.9	360.7	359.4
70°	329.1	327.0	324.7	322.9	321.6	320.4	319.1	317.8
72.5°	289.9	287.7	285.4	283.8	282.8	281.7	280.7	279.7
75°	228.8	226.8	224.9	224.2	224.9	225.5	226.1	226.8
77.5°	174.0	173.1	172.1	171.2	170.2	169.4	168.4	167.6
80°	138.2	137.2	136.3	135.4	134.8	134.2	133.6	132.9
82.5°	103.0	101.8	100.6	99.9	99.7	99.6	99.5	99.3
85°	54.4	53.4	52.5	51.8	51.6	51.2	50.9	50.5
87.5°	20.6	20.1	19.6	19.3	19.2	19.0	18.9	18.8
90°	29.8	31.3	32.8	33.8	34.4	35.0	35.6	36.2
92.5°	32.6	33.5	34.2	34.8	35.2	35.4	35.8	36.2
95°	55.2	56.7	58.2	58.8	58.5	58.2	58.0	57.7
97.5°	72.4	73.5	74.7	75.5	75.9	76.3	76.6	76.9
100°	81.2	83.6	86.0	87.5	88.0	88.6	89.3	89.8
102.5°	84.7	87.8	91.0	92.9	93.8	94.5	95.4	96.2
105°	88.3	91.6	94.9	97.1	98.3	99.5	100.7	101.9
107.5°	107.8	104.4	101.1	100.1	101.2	102.5	103.7	104.8
110°	175.0	145.2	115.5	101.1	102.4	103.5	104.7	105.9





TEST NUMBER: P331613-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	374.4	265.7	157.0	103.1	104.2	105.1	106.0	107.0
115°	551.3	413.3	275.4	195.7	174.3	152.8	131.4	109.9
117.5°	849.4	816.1	782.7	730.8	660.3	589.7	519.2	448.8
120°	989.8	993.3	996.9	978.5	938.4	898.1	857.9	817.7
122.5°	1050.2	1052.3	1054.4	1051.6	1043.8	1036.0	1028.2	1020.4
125°	1136.9	1139.0	1141.0	1142.6	1143.5	1144.3	1145.3	1146.1
127.5°	1217.1	1220.1	1223.1	1224.8	1224.9	1225.1	1225.3	1225.5
130°	1268.0	1271.3	1274.5	1276.0	1275.7	1275.4	1275.2	1274.8
132.5°	1317.4	1320.2	1323.0	1324.3	1324.0	1323.7	1323.4	1323.0
135°	1388.0	1391.0	1394.0	1395.2	1394.6	1394.0	1393.4	1392.8
137.5°	1453.6	1456.5	1459.4	1460.4	1459.3	1458.4	1457.4	1456.3
140°	1496.0	1498.7	1501.4	1501.9	1500.5	1499.0	1497.5	1496.0
142.5°	1535.2	1537.7	1540.1	1540.6	1539.1	1537.6	1536.2	1534.6
145°	1590.0	1592.0	1594.2	1594.5	1593.0	1591.5	1590.0	1588.6
147.5°	1637.8	1639.3	1640.9	1641.0	1639.7	1638.5	1637.2	1636.0
150°	1667.2	1669.0	1670.8	1670.8	1669.4	1667.9	1666.4	1664.9
152.5°	1693.9	1695.7	1697.5	1697.4	1695.4	1693.6	1691.6	1689.6
155°	1730.1	1731.9	1733.7	1733.4	1731.1	1728.7	1726.3	1723.9
157.5°	1760.7	1762.6	1764.7	1764.5	1762.3	1759.9	1757.6	1755.3
160°	1778.4	1780.2	1782.0	1781.9	1779.8	1777.6	1775.6	1773.5
162.5°	1795.0	1797.1	1799.0	1798.7	1796.2	1793.7	1791.1	1788.6
165°	1815.2	1817.3	1819.4	1819.4	1817.3	1815.2	1813.2	1811.0
167.5°	1832.1	1834.2	1836.3	1836.0	1833.3	1830.6	1828.0	1825.2
170°	1840.7	1842.8	1844.8	1844.6	1841.9	1839.2	1836.5	1833.8
172.5°	1847.1	1849.2	1851.2	1851.0	1848.3	1845.6	1843.0	1840.2
175°	1854.1	1856.1	1858.2	1857.8	1854.8	1851.8	1848.9	1845.9
177.5°	1854.8	1856.5	1858.2	1857.9	1855.8	1853.7	1851.5	1849.4
180°	1852.6	1852.6	1852.6	1852.6	1852.6	1852.6	1852.6	1852.6

(END OF REPORT)