

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331614-830

Luminaire Tested: **S122DIW-S1005D1440U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331614-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIW-S1005D1440U830-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1440 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8536.9 lumens  
Efficiency: N/A  
Efficacy: 103.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 82.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331614-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

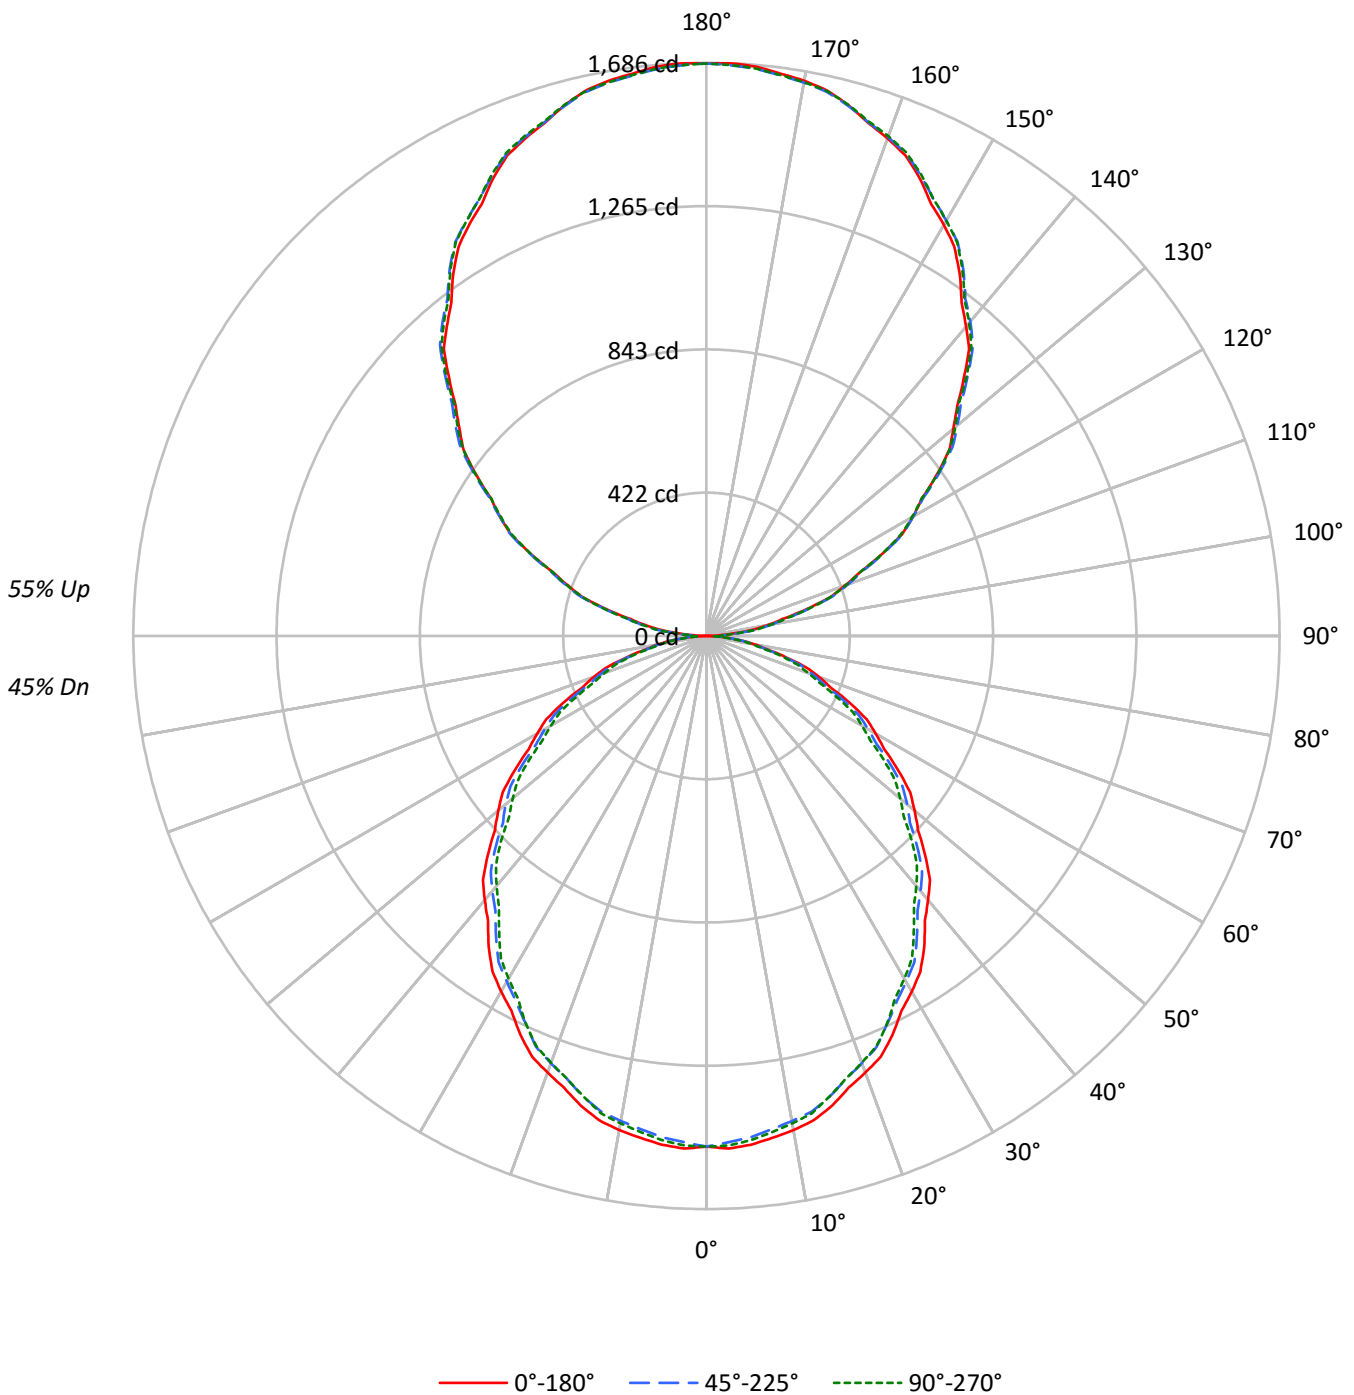



TEST NUMBER: P331614-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45
1	97	92	88	85	88	85	81	78	70	68	66	57	56	54	45	44	43	38
2	88	81	74	69	80	74	69	64	62	58	55	50	48	45	40	38	36	32
3	80	71	64	58	73	65	59	54	54	50	46	45	41	38	35	33	31	27
4	73	63	55	49	67	58	51	46	48	43	39	40	36	33	32	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34	36	32	28	28	26	23	20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	21	18
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18	16
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14
9	49	37	30	25	45	35	28	23	29	24	20	25	21	18	20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	24254	24254	24254
5°	24347	23995	24136
10°	24202	23753	23871
15°	23903	23445	23422
20°	23479	22983	22957
25°	23058	22413	22413
30°	22514	21893	21705
35°	22007	21268	20954
40°	21372	20643	20244
45°	20747	20021	19527
50°	20065	19376	18686
55°	19356	18624	17931
60°	18564	17725	17073
65°	17712	16829	16061
70°	16636	15753	15002
75°	15140	14504	14148
80°	13436	13036	12357
85°	10967	10448	9355



TEST NUMBER: P331614-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	141.3	1.7
10°-20°	397.5	4.7
20°-30°	584.2	6.8
30°-40°	678.6	7.9
40°-50°	677.9	7.9
50°-60°	591.2	6.9
60°-70°	437.1	5.1
70°-80°	247.6	2.9
80°-90°	73.3	0.9
90°-100°	106.7	1.2
100°-110°	331.4	3.9
110°-120°	566.4	6.6
120°-130°	744.9	8.7
130°-140°	836.1	9.8
140°-150°	819.8	9.6
150°-160°	687.6	8.1
160°-170°	456.0	5.3
170°-180°	159.4	1.9
0°-30°	1123.0	13.2
0°-40°	1801.6	21.1
0°-60°	3070.7	36.0
0°-90°	3828.7	44.8
90°-120°	1004.5	11.8
90°-150°	3405.2	39.9
90°-180°	4708.0	55.1
0°-180°	8536.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1502	1502	1502	1502	1502	
5°	1502	1496	1480	1491	1489	142
15°	1430	1421	1403	1408	1401	402
25°	1294	1282	1258	1261	1258	595
35°	1116	1102	1079	1070	1063	697
45°	909	898	877	862	855	701
55°	688	678	662	645	637	615
65°	464	455	440	428	420	458
75°	243	240	232	225	227	259
85°	59	58	56	52	50	68
90°	1	19	50	47	48	7
95°	74	87	91	91	88	85
105°	306	310	313	315	316	323
115°	568	576	574	572	568	562
125°	827	839	836	831	830	739
135°	1070	1085	1088	1087	1083	826
145°	1299	1309	1317	1318	1313	811
155°	1485	1489	1493	1500	1496	683
165°	1616	1614	1614	1623	1617	455
175°	1681	1677	1674	1683	1675	160
180°	1684	1684	1684	1684	1684	



TEST NUMBER: P331614-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2
2.5°	1509.2	1507.9	1506.7	1505.3	1504.0	1502.0	1499.2	1496.4	1493.6	1490.7	1493.3
5°	1502.2	1501.0	1499.7	1498.4	1497.1	1494.7	1491.2	1487.6	1484.1	1480.5	1483.2
7.5°	1488.9	1487.0	1485.0	1483.0	1481.0	1478.2	1474.6	1471.0	1467.4	1463.9	1466.4
10°	1476.2	1474.0	1471.8	1469.5	1467.3	1464.2	1460.4	1456.5	1452.6	1448.8	1451.4
12.5°	1459.0	1456.9	1454.9	1452.9	1451.0	1448.0	1444.2	1440.3	1436.5	1432.7	1434.5
15°	1430.0	1428.1	1426.2	1424.3	1422.3	1419.3	1415.1	1410.9	1406.7	1402.6	1403.9
17.5°	1393.1	1391.1	1389.2	1387.2	1385.3	1382.2	1378.0	1373.8	1369.5	1365.4	1366.8
20°	1366.5	1364.5	1362.6	1360.7	1358.8	1355.6	1351.0	1346.6	1342.1	1337.6	1338.5
22.5°	1339.9	1337.2	1334.5	1331.8	1329.1	1325.7	1321.4	1317.2	1313.0	1308.7	1308.9
25°	1294.3	1291.7	1289.1	1286.6	1284.0	1280.0	1274.5	1269.0	1263.6	1258.1	1258.8
27.5°	1242.3	1239.9	1237.7	1235.3	1233.0	1229.7	1225.4	1221.1	1216.8	1212.5	1211.5
30°	1207.6	1205.0	1202.4	1199.9	1197.3	1193.6	1188.8	1184.0	1179.2	1174.3	1173.4
32.5°	1170.6	1168.6	1166.5	1164.4	1162.3	1158.9	1153.8	1148.7	1143.6	1138.5	1136.8
35°	1116.5	1113.3	1110.1	1106.9	1103.7	1099.6	1094.4	1089.3	1084.2	1079.0	1077.1
37.5°	1055.6	1052.8	1050.0	1047.2	1044.3	1040.4	1035.2	1030.1	1024.9	1019.8	1017.4
40°	1014.0	1011.4	1008.9	1006.4	1003.7	999.9	994.8	989.7	984.5	979.4	976.5
42.5°	973.6	971.0	968.5	965.9	963.3	959.4	954.3	949.1	944.1	938.9	935.8
45°	908.6	906.3	904.1	901.8	899.6	896.1	891.3	886.5	881.7	876.8	873.3
47.5°	843.9	841.8	839.6	837.5	835.4	831.8	826.8	821.8	816.8	811.8	808.0
50°	798.8	797.2	795.6	794.0	792.4	789.3	784.9	780.3	775.8	771.4	766.9
52.5°	754.9	752.8	750.6	748.6	746.4	743.2	739.0	734.7	730.6	726.3	722.6
55°	687.6	685.6	683.7	681.8	679.9	676.9	673.2	669.3	665.4	661.6	657.7
57.5°	620.0	618.4	616.9	615.4	613.8	611.0	606.7	602.5	598.2	594.0	590.2
60°	574.9	573.6	572.3	571.1	569.8	566.8	562.4	557.9	553.4	548.9	545.4
62.5°	531.0	529.0	526.9	524.8	522.7	520.0	516.5	513.1	509.6	506.1	502.8
65°	463.6	461.8	459.9	457.9	456.0	453.4	450.2	447.0	443.7	440.5	437.7
67.5°	395.2	393.7	392.1	390.6	389.1	386.8	383.9	381.1	378.1	375.3	373.1
70°	352.4	351.2	349.9	348.6	347.3	345.3	342.3	339.4	336.6	333.7	331.4
72.5°	308.5	307.3	305.9	304.7	303.4	301.8	300.0	298.1	296.2	294.4	292.1
75°	242.7	242.0	241.4	240.7	240.1	238.9	237.3	235.7	234.1	232.5	230.6
77.5°	183.7	182.7	181.5	180.5	179.4	178.5	177.9	177.2	176.5	176.0	174.9
80°	144.5	144.1	143.8	143.5	143.2	142.7	142.0	141.4	140.7	140.2	139.1
82.5°	107.4	107.4	107.4	107.3	107.2	107.0	106.6	106.2	105.8	105.5	104.2
85°	59.2	58.9	58.6	58.2	58.0	57.6	57.3	56.9	56.6	56.4	55.3
87.5°	21.1	21.3	21.6	21.8	22.1	22.6	23.5	24.4	25.3	26.1	25.3
90°	1.4	5.2	9.0	12.8	16.6	22.0	28.9	35.8	42.8	49.8	49.1
92.5°	25.3	28.1	30.8	33.6	36.4	38.6	40.2	41.9	43.5	45.1	45.3
95°	73.9	77.0	80.2	83.3	86.5	88.4	89.1	89.6	90.3	91.0	91.0
97.5°	135.0	137.8	140.5	143.4	146.1	148.1	149.3	150.5	151.7	152.9	152.9
100°	180.5	182.9	185.5	188.0	190.6	192.3	193.2	194.2	195.1	196.0	196.0
102.5°	228.2	230.3	232.2	234.2	236.3	237.9	239.1	240.3	241.5	242.7	243.0
105°	305.5	306.4	307.4	308.3	309.2	310.1	310.8	311.3	312.0	312.6	313.2
107.5°	383.3	384.7	386.2	387.6	388.9	389.6	389.6	389.6	389.6	389.6	389.8
110°	433.4	435.3	437.2	439.0	440.9	442.0	442.0	442.0	442.0	442.0	442.0



TEST NUMBER: P331614-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	488.0	489.8	491.7	493.6	495.5	496.3	496.1	495.9	495.6	495.3	494.6
115°	568.4	570.2	572.1	574.1	576.0	576.6	576.0	575.3	574.7	574.1	573.7
117.5°	648.6	651.0	653.6	656.1	658.6	659.0	657.2	655.4	653.7	652.0	651.2
120°	701.9	704.5	707.0	709.5	712.1	712.1	709.5	707.0	704.5	701.9	701.9
122.5°	750.8	753.8	756.9	759.9	763.0	763.6	761.9	760.1	758.3	756.5	755.7
125°	827.0	829.8	832.6	835.5	838.4	839.3	838.4	837.4	836.5	835.5	834.5
127.5°	901.2	904.7	908.3	912.0	915.6	916.8	915.7	914.5	913.4	912.3	911.1
130°	947.7	951.9	956.0	960.1	964.2	965.9	965.3	964.7	964.0	963.4	962.8
132.5°	1000.0	1003.4	1006.7	1010.1	1013.4	1015.2	1015.3	1015.4	1015.6	1015.7	1014.3
135°	1070.0	1073.5	1076.9	1080.3	1083.8	1085.9	1086.6	1087.2	1087.8	1088.4	1088.2
137.5°	1143.6	1146.4	1149.2	1152.1	1154.9	1156.8	1157.6	1158.4	1159.2	1160.1	1159.8
140°	1187.9	1190.7	1193.6	1196.5	1199.3	1201.5	1203.1	1204.7	1206.3	1207.8	1207.8
142.5°	1233.4	1236.2	1239.1	1241.9	1244.7	1246.7	1247.7	1248.9	1249.9	1251.0	1251.2
145°	1298.7	1301.0	1303.2	1305.3	1307.6	1309.7	1311.5	1313.4	1315.3	1317.2	1317.5
147.5°	1357.0	1359.6	1362.3	1365.0	1367.6	1369.6	1370.8	1372.1	1373.4	1374.6	1375.4
150°	1396.8	1398.6	1400.6	1402.5	1404.4	1405.9	1407.2	1408.4	1409.8	1411.0	1411.9
152.5°	1432.0	1433.9	1435.8	1437.7	1439.6	1441.3	1442.8	1444.4	1445.9	1447.4	1448.6
155°	1484.9	1485.8	1486.8	1487.7	1488.7	1489.6	1490.5	1491.5	1492.4	1493.4	1495.0
157.5°	1530.0	1530.7	1531.3	1532.0	1532.6	1533.2	1533.8	1534.4	1534.9	1535.5	1537.6
160°	1557.4	1558.0	1558.6	1559.2	1559.9	1560.4	1560.7	1560.9	1561.3	1561.6	1563.5
162.5°	1582.3	1582.5	1582.6	1582.7	1582.9	1583.1	1583.4	1583.8	1584.0	1584.3	1586.5
165°	1615.6	1615.3	1615.0	1614.7	1614.4	1614.2	1614.2	1614.2	1614.2	1614.2	1616.4
167.5°	1643.4	1642.5	1641.5	1640.6	1639.6	1639.2	1639.1	1639.1	1639.0	1638.9	1641.2
170°	1658.2	1657.3	1656.3	1655.4	1654.4	1653.8	1653.5	1653.2	1652.8	1652.6	1654.7
172.5°	1668.5	1667.5	1666.6	1665.7	1664.7	1664.1	1663.8	1663.4	1663.1	1662.7	1665.0
175°	1680.9	1680.0	1679.0	1678.1	1677.2	1676.4	1675.7	1675.1	1674.5	1673.9	1676.1
177.5°	1686.1	1685.4	1684.6	1683.9	1683.1	1682.4	1681.9	1681.4	1680.9	1680.4	1681.9
180°	1683.9	1683.9	1683.9	1683.9	1683.9	1683.9	1683.9	1683.9	1683.9	1683.9	1683.9



TEST NUMBER: P331614-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2
2.5°	1495.8	1498.4	1501.0	1502.0	1501.5	1501.0	1500.4	1500.0
5°	1485.7	1488.3	1490.8	1491.9	1491.2	1490.5	1489.9	1489.2
7.5°	1469.0	1471.5	1474.1	1475.1	1474.3	1473.7	1472.9	1472.3
10°	1454.0	1456.5	1459.1	1459.9	1459.0	1457.9	1457.0	1456.0
12.5°	1436.2	1438.0	1439.8	1440.4	1439.6	1439.0	1438.2	1437.6
15°	1405.1	1406.5	1407.7	1407.6	1406.0	1404.4	1402.8	1401.2
17.5°	1368.3	1369.8	1371.2	1371.2	1369.6	1368.1	1366.6	1365.0
20°	1339.5	1340.5	1341.4	1341.2	1340.0	1338.7	1337.5	1336.1
22.5°	1309.1	1309.3	1309.5	1309.2	1308.4	1307.7	1306.8	1306.1
25°	1259.4	1260.1	1260.7	1260.7	1260.1	1259.4	1258.8	1258.1
27.5°	1210.6	1209.6	1208.6	1207.4	1205.9	1204.3	1202.8	1201.3
30°	1172.4	1171.5	1170.5	1169.4	1168.1	1166.8	1165.5	1164.2
32.5°	1135.1	1133.3	1131.6	1130.1	1128.8	1127.6	1126.2	1124.9
35°	1075.2	1073.3	1071.3	1069.6	1068.0	1066.4	1064.7	1063.1
37.5°	1015.0	1012.7	1010.3	1008.3	1006.8	1005.2	1003.7	1002.2
40°	973.6	970.7	967.8	965.7	964.4	963.2	961.9	960.5
42.5°	932.6	929.4	926.3	923.9	922.1	920.3	918.5	916.6
45°	869.8	866.2	862.7	860.3	858.9	857.7	856.4	855.2
47.5°	804.4	800.6	796.9	794.1	792.2	790.4	788.5	786.6
50°	762.3	757.9	753.4	750.4	748.8	747.2	745.6	743.9
52.5°	718.9	715.1	711.4	708.5	706.3	704.3	702.1	700.0
55°	653.8	650.0	646.2	643.5	641.9	640.3	638.7	637.0
57.5°	586.4	582.6	578.8	576.3	575.1	573.9	572.7	571.5
60°	541.9	538.3	534.8	532.5	531.6	530.7	529.6	528.7
62.5°	499.6	496.3	493.0	490.8	489.6	488.3	487.1	485.9
65°	434.8	431.9	429.0	426.8	425.2	423.6	422.0	420.4
67.5°	370.8	368.5	366.3	364.5	363.3	361.9	360.7	359.4
70°	329.1	327.0	324.7	322.9	321.6	320.4	319.1	317.8
72.5°	289.9	287.7	285.4	283.8	282.8	281.7	280.7	279.7
75°	228.8	226.8	224.9	224.2	224.9	225.5	226.1	226.8
77.5°	174.0	173.1	172.1	171.2	170.2	169.4	168.4	167.6
80°	138.2	137.2	136.3	135.4	134.8	134.2	133.6	132.9
82.5°	103.0	101.8	100.6	99.9	99.7	99.6	99.5	99.3
85°	54.4	53.4	52.5	51.8	51.6	51.2	50.9	50.5
87.5°	24.3	23.5	22.5	22.0	21.8	21.6	21.4	21.2
90°	48.4	47.9	47.2	47.0	47.4	47.7	48.0	48.4
92.5°	45.4	45.5	45.7	45.8	45.8	45.9	46.0	46.0
95°	91.0	91.0	91.0	90.6	90.0	89.4	88.7	88.1
97.5°	152.9	152.9	152.9	152.9	152.8	152.7	152.7	152.6
100°	196.0	196.0	196.0	196.0	195.6	195.3	195.0	194.6
102.5°	243.2	243.5	243.7	243.6	243.4	243.1	242.7	242.4
105°	313.9	314.5	315.1	315.5	315.5	315.5	315.5	315.5
107.5°	390.1	390.4	390.6	390.0	388.6	387.1	385.7	384.2
110°	442.0	442.0	442.0	441.4	440.5	439.5	438.6	437.6





TEST NUMBER: P331614-830

CATALOG NUMBER: S122DIW-S1005D1440U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	493.8	493.0	492.3	491.5	490.9	490.2	489.5	488.8
115°	573.4	573.1	572.8	572.1	571.2	570.2	569.3	568.4
117.5°	650.4	649.7	648.9	648.0	647.1	646.1	645.2	644.2
120°	701.9	701.9	701.9	701.4	700.5	699.6	698.6	697.7
122.5°	755.0	754.2	753.5	752.7	752.1	751.4	750.6	750.0
125°	833.6	832.6	831.7	831.1	830.8	830.5	830.2	829.8
127.5°	909.9	908.8	907.7	906.6	905.6	904.6	903.6	902.6
130°	962.1	961.5	960.8	959.9	958.7	957.4	956.1	954.9
132.5°	1013.0	1011.5	1010.1	1008.9	1008.0	1006.9	1005.9	1004.8
135°	1087.8	1087.5	1087.2	1086.6	1085.6	1084.7	1083.7	1082.8
137.5°	1159.5	1159.3	1159.0	1158.3	1157.1	1155.7	1154.5	1153.2
140°	1207.8	1207.8	1207.8	1207.2	1205.9	1204.7	1203.3	1202.1
142.5°	1251.5	1251.8	1252.0	1251.5	1250.3	1249.0	1247.7	1246.4
145°	1317.9	1318.1	1318.4	1318.0	1316.7	1315.5	1314.2	1313.0
147.5°	1376.0	1376.7	1377.4	1377.1	1375.9	1374.7	1373.6	1372.3
150°	1412.9	1413.8	1414.8	1414.8	1413.8	1412.9	1411.9	1411.0
152.5°	1449.7	1451.0	1452.2	1452.2	1451.0	1449.7	1448.6	1447.4
155°	1496.6	1498.2	1499.7	1500.1	1499.1	1498.2	1497.2	1496.3
157.5°	1539.7	1541.9	1544.1	1544.4	1542.8	1541.3	1539.8	1538.3
160°	1565.4	1567.3	1569.1	1569.5	1568.2	1567.0	1565.8	1564.4
162.5°	1588.7	1590.8	1592.9	1593.3	1591.8	1590.3	1588.7	1587.1
165°	1618.6	1620.8	1623.1	1623.3	1621.7	1620.2	1618.6	1617.0
167.5°	1643.3	1645.6	1647.8	1648.0	1646.4	1644.7	1643.1	1641.4
170°	1657.0	1659.2	1661.4	1661.5	1659.6	1657.7	1655.9	1654.0
172.5°	1667.2	1669.4	1671.6	1671.8	1669.9	1668.0	1666.1	1664.2
175°	1678.3	1680.5	1682.7	1682.9	1680.9	1679.0	1677.2	1675.3
177.5°	1683.5	1685.0	1686.5	1686.5	1685.0	1683.5	1681.9	1680.4
180°	1683.9	1683.9	1683.9	1683.9	1683.9	1683.9	1683.9	1683.9

(END OF REPORT)