

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331592-830

Luminaire Tested: **S122DIW-S1005D710U830-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331592-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S1005D710U830-4F0-1E-UDD-A1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 710 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6467.3 lumens
Efficiency: N/A
Efficacy: 108.1 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 59.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

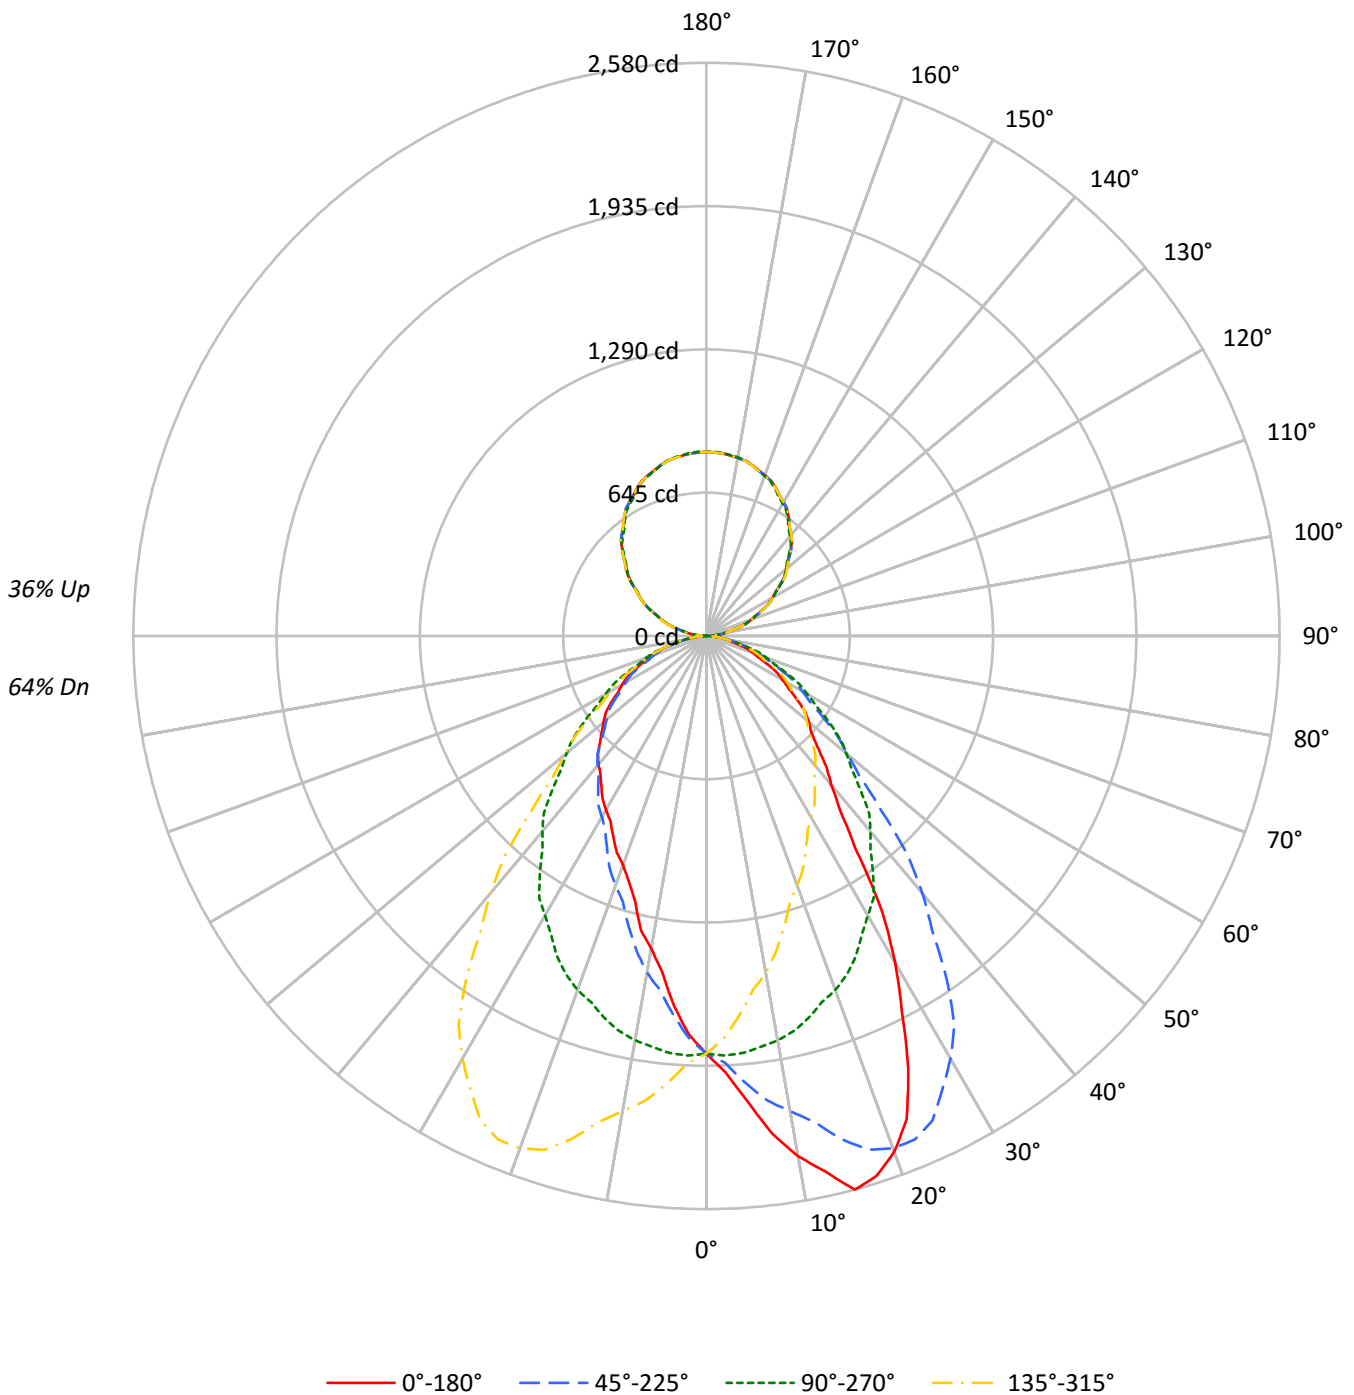



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	69	69	69	64
1	102	97	94	90	95	92	88	85	81	79	76	71	69	68	62	61	60	55
2	93	86	80	75	87	81	76	71	72	68	64	63	60	58	55	53	51	47
3	85	76	69	63	80	72	65	60	64	59	55	56	53	49	50	47	44	41
4	78	68	60	54	73	64	57	52	57	52	47	51	46	43	45	41	39	36
5	72	61	53	47	68	58	50	45	52	46	41	46	41	38	41	37	34	31
6	67	55	47	41	63	52	45	40	47	41	36	42	37	33	37	33	30	28
7	62	50	42	36	58	47	40	35	43	37	32	38	33	30	34	30	27	25
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	28	25	22
9	54	42	34	29	51	40	33	28	36	30	26	33	28	24	29	25	22	20
10	51	38	31	26	48	37	30	26	33	28	24	30	26	22	27	23	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	30344	30344	30344	30344
5°	34020	30543	27067	30543
10°	38984	30293	23423	30293
15°	43127	29737	20694	29737
20°	42471	29141	18866	29141
25°	38297	28349	17706	28349
30°	31646	27082	16861	27082
35°	23065	25754	16259	25754
40°	18421	24190	15924	24190
45°	16098	22379	15470	22379
50°	15131	20627	15169	20627
55°	13948	18849	14762	18849
60°	12784	16956	14134	16956
65°	11645	15259	13521	15259
70°	10570	13605	12619	13605
75°	9370	11759	11179	11759
80°	8061	9735	9000	9735
85°	7225	7225	5354	7225



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	179.0	2.8
10°-20°	520.4	8.0
20°-30°	755.2	11.7
30°-40°	796.9	12.3
40°-50°	705.6	10.9
50°-60°	563.1	8.7
60°-70°	382.7	5.9
70°-80°	196.2	3.0
80°-90°	50.6	0.8
90°-100°	52.5	0.8
100°-110°	163.1	2.5
110°-120°	278.8	4.3
120°-130°	366.6	5.7
130°-140°	411.5	6.4
140°-150°	403.5	6.2
150°-160°	338.4	5.2
160°-170°	224.5	3.5
170°-180°	78.5	1.2
0°-30°	1454.6	22.5
0°-40°	2251.5	34.8
0°-60°	3520.2	54.4
0°-90°	4149.8	64.2
90°-120°	494.4	7.6
90°-150°	1676.1	25.9
90°-180°	2317.0	35.8
0°-180°	6467.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1879	1879	1879	1879	1879	
5°	2099	1884	1670	1884	2099	210
15°	2580	1779	1238	1779	2580	712
25°	2150	1591	994	1591	2150	972
35°	1170	1307	825	1307	1170	761
45°	705	980	678	980	705	554
55°	496	670	524	670	496	444
65°	305	399	354	399	305	303
75°	150	188	179	188	150	161
85°	39	39	29	39	39	43
90°	24	1	24	1	24	12
95°	43	36	43	36	43	48
105°	155	150	155	150	155	163
115°	280	280	280	280	280	276
125°	408	407	408	407	408	364
135°	533	527	533	527	533	410
145°	646	639	646	639	646	404
155°	736	731	736	731	736	339
165°	796	795	796	795	796	224
175°	825	827	825	827	825	78
180°	829	829	829	829	829	



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4
2.5°	1966.1	1966.7	1967.8	1958.6	1957.5	1957.5	1949.4	1942.5	1934.4	1923.4	1924.6
5°	2099.0	2107.0	2109.9	2101.2	2088.2	2086.8	2074.5	2054.3	2035.5	2020.3	2009.5
7.5°	2257.7	2260.9	2253.8	2242.4	2232.7	2215.4	2192.5	2170.1	2138.8	2110.1	2088.7
10°	2377.8	2382.2	2369.9	2353.3	2339.6	2319.4	2286.1	2252.2	2211.0	2171.3	2139.5
12.5°	2469.2	2479.8	2464.1	2461.9	2438.5	2410.6	2371.1	2353.9	2295.9	2240.6	2206.6
15°	2580.1	2579.4	2580.9	2567.1	2549.8	2545.4	2503.6	2458.1	2376.4	2343.9	2287.6
17.5°	2548.1	2559.0	2564.1	2563.9	2563.5	2560.8	2547.3	2518.6	2477.7	2425.0	2359.9
20°	2471.8	2486.2	2488.4	2505.0	2514.4	2526.7	2531.8	2523.8	2498.5	2454.5	2398.1
22.5°	2353.9	2358.0	2364.7	2390.6	2410.9	2441.8	2457.8	2484.4	2474.8	2453.2	2406.2
25°	2149.7	2142.4	2167.7	2180.7	2227.6	2276.7	2312.2	2351.2	2385.9	2406.8	2393.0
27.5°	1904.3	1893.5	1931.4	1965.9	2004.0	2057.2	2112.3	2177.5	2231.7	2299.4	2322.7
30°	1697.4	1703.9	1740.0	1776.9	1834.7	1909.8	1971.9	2043.4	2120.7	2196.6	2249.3
32.5°	1474.4	1499.4	1522.2	1578.7	1629.6	1713.4	1804.3	1893.8	1990.2	2076.4	2158.0
35°	1170.2	1199.0	1230.9	1272.0	1343.5	1426.5	1515.4	1636.1	1767.6	1885.3	1982.1
37.5°	985.0	980.3	998.5	1028.3	1086.2	1153.3	1255.6	1374.7	1529.5	1667.8	1804.3
40°	874.0	871.1	884.1	911.5	955.6	1004.8	1094.3	1199.0	1342.7	1511.8	1674.3
42.5°	797.8	799.5	806.7	826.0	856.2	896.6	963.7	1052.8	1184.5	1343.7	1518.3
45°	705.0	710.0	718.0	727.4	744.7	778.0	815.5	879.1	983.1	1116.0	1287.9
47.5°	638.2	638.4	646.5	654.7	665.0	683.7	714.4	754.2	827.6	935.9	1083.6
50°	602.4	597.4	603.1	609.6	620.5	633.5	653.7	691.3	740.4	827.7	951.3
52.5°	558.5	558.6	563.8	566.3	576.0	589.0	607.5	633.5	678.0	746.3	847.8
55°	495.5	499.1	502.0	506.3	515.0	524.4	538.9	556.2	590.9	642.2	717.3
57.5°	436.3	437.4	440.4	448.6	454.0	462.7	476.5	492.2	514.7	552.7	609.2
60°	395.9	395.9	401.6	405.2	412.5	421.1	432.0	447.1	467.3	498.4	543.9
62.5°	358.8	358.3	360.6	366.5	372.0	380.1	390.9	403.8	422.8	450.4	487.9
65°	304.8	303.4	307.7	309.2	314.9	322.9	331.6	345.3	360.4	380.7	413.9
67.5°	252.8	254.6	256.8	259.6	262.8	271.2	276.9	286.6	299.4	316.2	338.7
70°	223.9	223.9	223.9	226.1	230.5	234.8	240.5	248.5	260.8	275.2	295.4
72.5°	191.5	193.9	196.1	194.9	200.4	202.9	209.9	214.4	226.1	235.4	253.3
75°	150.2	150.2	150.2	153.8	156.0	158.2	162.5	166.8	172.7	184.2	193.6
77.5°	112.1	111.8	112.5	113.4	115.7	118.3	119.6	123.5	128.8	134.2	142.1
80°	86.7	88.1	88.9	90.3	90.3	91.7	92.5	97.6	101.1	104.7	109.8
82.5°	67.0	67.3	67.5	67.8	68.3	69.2	71.1	72.7	74.0	77.0	80.9
85°	39.0	38.3	38.3	39.7	39.0	39.0	40.4	41.8	41.8	42.6	44.8
87.5°	19.8	19.8	20.3	19.7	19.7	20.3	20.3	19.8	20.5	21.1	20.9
90°	23.8	23.7	23.5	23.3	23.2	23.3	23.6	23.8	24.1	24.5	21.0
92.5°	22.6	22.6	22.6	22.5	22.5	22.5	22.4	22.3	22.3	22.2	21.4
95°	43.4	43.6	44.0	44.3	44.6	44.8	44.8	44.8	44.8	44.8	44.5
97.5°	75.1	75.1	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	74.6
100°	95.9	96.0	96.1	96.3	96.4	96.5	96.5	96.5	96.5	96.5	96.0
102.5°	119.3	119.5	119.6	119.8	120.0	120.0	119.8	119.7	119.6	119.4	118.9
105°	155.2	155.2	155.2	155.2	155.2	155.1	154.8	154.5	154.2	153.9	153.5
107.5°	189.2	189.8	190.6	191.2	192.0	192.3	192.2	192.0	191.9	191.8	191.8
110°	215.5	215.8	216.3	216.8	217.3	217.5	217.5	217.5	217.5	217.5	217.5



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	240.6	240.9	241.3	241.7	242.0	242.3	242.7	243.1	243.5	243.8	243.9
115°	279.7	280.2	280.7	281.2	281.6	281.9	282.1	282.3	282.4	282.6	282.9
117.5°	317.1	317.5	318.0	318.5	319.0	319.4	319.8	320.2	320.6	320.9	321.8
120°	343.4	343.8	344.3	344.8	345.3	345.5	345.5	345.5	345.5	345.5	346.8
122.5°	369.2	369.5	369.9	370.1	370.5	370.9	371.3	371.6	372.0	372.4	373.2
125°	408.5	408.6	408.8	409.0	409.1	409.3	409.8	410.3	410.8	411.2	411.7
127.5°	444.3	444.8	445.3	445.7	446.3	446.8	447.3	447.9	448.5	449.0	449.6
130°	470.0	470.6	471.3	471.8	472.5	473.0	473.3	473.6	473.9	474.2	474.5
132.5°	494.6	495.1	495.6	496.2	496.6	497.2	497.9	498.6	499.3	499.9	499.9
135°	532.9	533.4	533.9	534.3	534.8	535.2	535.3	535.5	535.6	535.7	535.5
137.5°	567.6	568.3	568.9	569.5	570.1	570.5	570.6	570.7	570.9	571.0	570.6
140°	591.7	592.3	593.0	593.6	594.2	594.5	594.5	594.5	594.5	594.5	593.7
142.5°	613.5	614.2	614.7	615.4	616.0	616.2	616.1	616.0	615.9	615.8	615.2
145°	646.3	646.9	647.5	648.1	648.8	648.9	648.8	648.7	648.5	648.4	647.4
147.5°	675.5	676.1	676.7	677.3	677.9	678.0	677.6	677.3	676.9	676.7	676.0
150°	694.6	695.0	695.4	695.9	696.4	696.4	695.9	695.4	695.0	694.6	693.9
152.5°	712.5	713.0	713.6	714.2	714.8	714.8	714.2	713.6	713.0	712.5	711.7
155°	736.5	737.0	737.4	737.9	738.4	738.2	737.4	736.6	735.8	735.1	734.6
157.5°	757.1	757.9	758.7	759.4	760.2	760.0	758.9	757.9	756.9	755.8	755.5
160°	770.1	770.7	771.3	771.9	772.5	772.4	771.5	770.5	769.6	768.6	768.5
162.5°	781.3	782.0	782.8	783.4	784.2	784.1	783.1	781.9	780.9	779.9	779.7
165°	796.0	796.7	797.5	798.2	799.1	798.9	797.8	796.7	795.6	794.6	794.6
167.5°	807.9	808.8	809.5	810.4	811.2	811.1	809.9	808.9	807.8	806.7	806.7
170°	814.1	815.0	816.0	816.9	817.8	817.7	816.7	815.6	814.5	813.4	813.6
172.5°	819.2	820.1	821.0	822.0	822.8	822.8	821.7	820.7	819.5	818.4	818.6
175°	824.6	825.6	826.5	827.4	828.3	828.3	827.2	826.0	825.0	823.9	824.3
177.5°	827.1	827.8	828.6	829.3	830.1	830.1	829.3	828.6	827.8	827.1	827.4
180°	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4
2.5°	1928.6	1924.0	1921.1	1910.7	1901.4	1892.2	1889.3	1890.5	1877.7	1865.6	1860.4
5°	2003.8	1989.2	1975.6	1956.1	1933.0	1907.6	1894.6	1884.5	1859.3	1831.8	1815.9
7.5°	2071.0	2050.4	2023.9	1987.3	1953.6	1913.8	1888.6	1866.1	1829.2	1790.5	1766.8
10°	2112.0	2083.9	2049.9	2005.2	1964.0	1915.6	1881.6	1847.7	1804.3	1758.1	1729.2
12.5°	2147.3	2109.3	2075.9	2018.5	1969.7	1909.2	1869.0	1821.1	1775.5	1720.5	1692.2
15°	2231.3	2161.2	2097.6	2032.6	1972.6	1888.1	1843.3	1779.0	1719.1	1651.2	1618.7
17.5°	2296.1	2217.3	2117.2	2034.7	1964.7	1871.1	1805.3	1728.3	1657.5	1579.9	1535.7
20°	2333.1	2242.8	2135.1	2036.9	1953.1	1846.3	1774.7	1696.0	1613.0	1525.5	1477.9
22.5°	2355.0	2260.1	2153.7	2028.3	1930.0	1826.0	1736.0	1649.7	1565.6	1471.2	1421.3
25°	2362.0	2275.3	2162.7	2021.1	1901.1	1783.4	1675.1	1591.3	1489.4	1401.3	1328.3
27.5°	2327.6	2265.5	2157.1	2007.4	1867.7	1730.1	1609.3	1514.4	1406.9	1311.3	1237.9
30°	2285.4	2249.3	2143.8	1993.6	1841.2	1693.1	1560.2	1452.6	1345.7	1248.9	1173.7
32.5°	2220.2	2212.3	2119.6	1974.0	1812.9	1646.3	1508.8	1400.0	1281.6	1186.5	1114.8
35°	2091.9	2126.5	2068.0	1930.0	1759.5	1579.7	1430.9	1306.6	1183.9	1092.9	1025.7
37.5°	1920.0	2006.0	1990.7	1865.8	1687.6	1507.2	1342.9	1213.1	1096.1	1004.2	938.3
40°	1801.5	1911.3	1927.1	1816.7	1636.8	1451.1	1277.1	1147.7	1033.6	949.9	883.4
42.5°	1674.3	1802.6	1846.3	1757.7	1581.3	1392.2	1218.1	1084.2	971.2	889.8	830.9
45°	1461.2	1631.0	1709.8	1659.2	1488.7	1295.1	1116.0	980.1	877.6	801.1	755.5
47.5°	1262.1	1447.6	1553.4	1535.5	1385.7	1194.0	1016.9	886.6	786.7	725.7	684.9
50°	1121.1	1311.7	1439.5	1445.4	1311.7	1121.7	944.1	821.2	729.5	672.5	639.2
52.5°	998.5	1180.5	1319.9	1350.6	1229.1	1046.6	878.7	756.6	675.8	623.4	593.6
55°	838.6	992.5	1147.1	1203.3	1105.9	932.6	777.2	669.6	593.7	557.6	531.6
57.5°	697.2	825.5	968.2	1030.5	970.3	822.0	676.4	582.9	521.4	489.7	469.8
60°	622.6	723.8	850.9	925.3	873.3	741.1	614.0	525.1	474.6	446.4	427.6
62.5°	553.3	642.9	750.4	818.4	790.0	665.4	551.6	473.2	429.5	403.0	389.5
65°	456.5	527.3	610.4	673.2	654.4	559.8	466.7	399.4	364.8	343.8	333.0
67.5°	375.9	427.1	484.7	539.7	524.5	457.5	382.7	330.4	304.5	286.4	279.9
70°	325.1	364.0	415.4	459.4	447.1	392.2	333.0	288.2	265.8	250.6	244.1
72.5°	276.5	308.6	347.7	383.7	375.4	329.8	280.4	246.6	229.4	215.4	210.1
75°	208.8	233.3	257.1	281.0	278.8	243.5	214.5	188.5	174.8	164.0	161.8
77.5°	154.1	167.9	184.1	198.2	194.3	174.1	151.4	136.5	126.4	119.1	118.0
80°	117.7	125.6	137.2	147.3	142.3	133.7	115.6	104.7	97.6	90.3	87.4
82.5°	85.4	93.3	100.3	105.8	101.9	93.8	82.7	75.3	71.0	66.0	64.8
85°	44.8	49.1	52.0	53.4	52.0	46.9	41.8	39.0	35.4	33.3	32.5
87.5°	20.8	20.2	19.5	20.2	18.0	17.6	15.0	12.8	12.6	12.4	11.7
90°	17.6	14.2	10.8	8.2	6.3	4.4	2.5	0.7	2.5	4.4	6.3
92.5°	20.6	19.8	19.0	17.9	16.6	15.2	13.9	12.4	13.9	15.2	16.6
95°	44.1	43.8	43.5	42.6	41.0	39.5	37.9	36.4	37.9	39.5	41.0
97.5°	74.1	73.5	72.9	71.9	70.5	69.2	67.8	66.4	67.8	69.2	70.5
100°	95.6	95.1	94.6	93.8	92.6	91.3	90.1	88.8	90.1	91.3	92.6
102.5°	118.3	117.7	117.1	116.3	115.3	114.3	113.3	112.4	113.3	114.3	115.3
105°	153.3	153.0	152.6	152.2	151.7	151.3	150.8	150.3	150.8	151.3	151.7
107.5°	191.8	191.8	191.8	191.4	190.8	190.1	189.4	188.7	189.4	190.1	190.8
110°	217.5	217.5	217.5	217.1	216.1	215.2	214.2	213.3	214.2	215.2	216.1



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	244.0	244.2	244.3	243.9	243.0	242.0	241.1	240.2	241.1	242.0	243.0
115°	283.1	283.5	283.8	283.5	282.6	281.6	280.7	279.7	280.7	281.6	282.6
117.5°	322.6	323.5	324.3	324.1	322.9	321.7	320.5	319.2	320.5	321.7	322.9
120°	348.0	349.2	350.4	350.4	349.2	348.0	346.8	345.5	346.8	348.0	349.2
122.5°	374.1	374.9	375.9	375.5	374.0	372.6	371.1	369.6	371.1	372.6	374.0
125°	412.2	412.6	413.1	412.6	411.2	409.8	408.5	407.1	408.5	409.8	411.2
127.5°	450.2	450.7	451.3	450.6	448.8	447.1	445.4	443.6	445.4	447.1	448.8
130°	474.9	475.1	475.4	474.6	472.6	470.5	468.5	466.5	468.5	470.5	472.6
132.5°	499.8	499.7	499.7	498.8	497.2	495.6	493.9	492.3	493.9	495.6	497.2
135°	535.2	534.8	534.5	533.5	531.8	530.1	528.4	526.7	528.4	530.1	531.8
137.5°	570.2	569.8	569.4	568.4	567.1	565.7	564.3	562.9	564.3	565.7	567.1
140°	593.0	592.2	591.4	590.3	588.9	587.5	586.1	584.8	586.1	587.5	588.9
142.5°	614.7	614.2	613.7	612.7	611.3	609.9	608.5	607.1	608.5	609.9	611.3
145°	646.5	645.5	644.6	643.7	642.5	641.4	640.4	639.2	640.4	641.4	642.5
147.5°	675.3	674.8	674.1	673.2	671.8	670.5	669.2	668.0	669.2	670.5	671.8
150°	693.2	692.7	692.0	691.3	690.3	689.4	688.4	687.5	688.4	689.4	690.3
152.5°	711.0	710.2	709.5	708.6	707.7	706.7	705.8	704.8	705.8	706.7	707.7
155°	734.1	733.7	733.2	732.7	732.3	731.8	731.3	730.8	731.3	731.8	732.3
157.5°	755.3	755.0	754.7	754.4	754.0	753.8	753.5	753.1	753.5	753.8	754.0
160°	768.4	768.2	768.1	767.8	767.5	767.1	766.9	766.6	766.9	767.1	767.5
162.5°	779.6	779.4	779.2	779.1	779.0	779.0	778.9	778.8	778.9	779.0	779.0
165°	794.6	794.6	794.6	794.7	794.8	794.9	795.0	795.2	795.0	794.9	794.8
167.5°	806.7	806.8	806.8	807.1	807.6	808.0	808.5	809.0	808.5	808.0	807.6
170°	813.7	813.9	814.1	814.4	814.8	815.3	815.8	816.2	815.8	815.3	814.8
172.5°	818.8	818.9	819.1	819.4	819.8	820.3	820.8	821.2	820.8	820.3	819.8
175°	824.5	824.8	825.2	825.6	826.0	826.5	827.0	827.4	827.0	826.5	826.0
177.5°	827.6	827.8	828.1	828.4	828.8	829.2	829.5	829.9	829.5	829.2	828.8
180°	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4
2.5°	1854.6	1851.2	1839.0	1832.7	1822.3	1812.4	1806.1	1809.0	1811.3	1810.2	1808.4
5°	1801.5	1787.7	1766.8	1748.7	1735.7	1711.9	1701.8	1696.8	1692.4	1687.3	1682.2
7.5°	1738.1	1716.6	1686.5	1660.8	1636.4	1606.8	1590.0	1579.9	1569.4	1558.0	1547.9
10°	1693.1	1662.7	1631.0	1594.9	1566.0	1539.3	1515.4	1499.5	1485.1	1471.4	1461.2
12.5°	1645.8	1610.8	1571.5	1522.1	1490.3	1452.0	1448.4	1420.4	1397.8	1389.3	1377.4
15°	1570.3	1521.2	1471.4	1412.9	1387.6	1352.9	1331.2	1309.6	1290.1	1276.3	1272.7
17.5°	1484.7	1421.1	1371.5	1329.5	1288.1	1252.5	1232.6	1215.2	1199.2	1180.8	1178.4
20°	1419.4	1364.4	1310.3	1273.5	1230.9	1194.7	1170.2	1152.8	1139.1	1128.2	1118.9
22.5°	1357.5	1297.4	1247.8	1207.6	1165.5	1136.3	1117.0	1100.2	1088.8	1076.9	1068.0
25°	1258.3	1211.4	1157.2	1111.6	1076.9	1058.2	1042.3	1027.8	1020.7	1012.7	1002.6
27.5°	1171.5	1119.3	1068.6	1033.3	1002.9	986.3	975.0	965.2	958.4	953.8	948.0
30°	1110.2	1057.4	1017.8	983.1	957.8	941.2	934.0	928.2	920.2	917.4	914.5
32.5°	1051.2	1003.7	969.8	939.7	915.6	904.7	898.1	893.0	886.7	883.8	878.1
35°	967.9	928.2	894.9	878.4	858.8	849.4	844.4	837.2	831.4	828.5	827.7
37.5°	889.5	855.0	833.1	811.7	803.5	797.8	790.8	785.9	784.2	783.7	783.0
40°	838.6	810.4	791.0	773.6	770.0	761.3	755.5	751.2	751.2	752.0	751.2
42.5°	792.4	767.1	749.9	734.9	730.7	725.5	719.7	719.4	720.6	723.0	720.6
45°	722.4	704.3	692.0	684.8	676.8	671.8	671.0	673.2	673.9	674.7	676.8
47.5°	657.9	645.9	634.8	626.8	623.4	622.5	621.6	625.4	628.9	630.2	633.5
50°	619.7	606.1	596.6	591.5	588.7	587.2	588.7	593.0	595.9	599.6	601.7
52.5°	577.0	567.3	560.8	556.9	555.7	556.7	556.9	561.8	566.5	567.8	568.7
55°	517.9	510.7	509.3	502.8	505.6	504.9	508.5	511.4	515.8	520.1	520.8
57.5°	458.9	453.2	449.3	449.9	450.7	453.9	456.9	462.0	466.7	471.3	471.6
60°	419.7	416.8	414.6	414.6	416.0	420.4	424.0	429.0	432.0	434.8	437.0
62.5°	383.8	381.0	378.8	379.9	383.7	386.3	390.5	393.2	396.2	399.0	400.0
65°	327.3	325.7	327.9	329.4	330.1	333.8	338.7	340.9	343.8	345.3	350.3
67.5°	275.0	275.3	275.0	277.1	281.3	282.1	286.9	292.0	292.6	295.3	298.6
70°	239.8	241.3	242.7	244.1	247.8	249.2	252.8	255.0	257.9	260.0	262.2
72.5°	207.5	207.7	209.2	208.9	211.9	215.1	218.1	220.3	223.2	225.9	228.1
75°	159.7	159.7	161.1	161.8	165.4	169.0	168.3	169.8	172.7	175.5	177.0
77.5°	116.6	115.0	116.6	117.3	118.5	121.5	122.1	124.1	127.4	126.4	128.0
80°	88.9	86.7	88.9	89.5	89.5	93.2	93.2	94.6	96.8	94.6	96.8
82.5°	63.4	62.4	64.0	64.2	65.3	65.4	66.6	66.9	69.1	68.1	69.1
85°	31.8	31.1	31.8	31.1	31.8	32.5	32.5	31.8	31.8	33.3	31.1
87.5°	11.5	11.4	11.5	12.2	12.3	12.4	11.8	11.7	11.7	10.5	10.4
90°	8.2	10.8	14.2	17.6	21.0	24.5	24.1	23.8	23.6	23.3	23.2
92.5°	17.9	19.0	19.8	20.6	21.4	22.2	22.3	22.3	22.4	22.5	22.5
95°	42.6	43.5	43.8	44.1	44.5	44.8	44.8	44.8	44.8	44.8	44.6
97.5°	71.9	72.9	73.5	74.1	74.6	75.2	75.2	75.2	75.2	75.2	75.2
100°	93.8	94.6	95.1	95.6	96.0	96.5	96.5	96.5	96.5	96.5	96.4
102.5°	116.3	117.1	117.7	118.3	118.9	119.4	119.6	119.7	119.8	120.0	120.0
105°	152.2	152.6	153.0	153.3	153.5	153.9	154.2	154.5	154.8	155.1	155.2
107.5°	191.4	191.8	191.8	191.8	191.8	191.8	191.9	192.0	192.2	192.3	192.0
110°	217.1	217.5	217.5	217.5	217.5	217.5	217.5	217.5	217.5	217.5	217.3



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	243.9	244.3	244.2	244.0	243.9	243.8	243.5	243.1	242.7	242.3	242.0
115°	283.5	283.8	283.5	283.1	282.9	282.6	282.4	282.3	282.1	281.9	281.6
117.5°	324.1	324.3	323.5	322.6	321.8	320.9	320.6	320.2	319.8	319.4	319.0
120°	350.4	350.4	349.2	348.0	346.8	345.5	345.5	345.5	345.5	345.5	345.3
122.5°	375.5	375.9	374.9	374.1	373.2	372.4	372.0	371.6	371.3	370.9	370.5
125°	412.6	413.1	412.6	412.2	411.7	411.2	410.8	410.3	409.8	409.3	409.1
127.5°	450.6	451.3	450.7	450.2	449.6	449.0	448.5	447.9	447.3	446.8	446.3
130°	474.6	475.4	475.1	474.9	474.5	474.2	473.9	473.6	473.3	473.0	472.5
132.5°	498.8	499.7	499.7	499.8	499.9	499.9	499.3	498.6	497.9	497.2	496.6
135°	533.5	534.5	534.8	535.2	535.5	535.7	535.6	535.5	535.3	535.2	534.8
137.5°	568.4	569.4	569.8	570.2	570.6	571.0	570.9	570.7	570.6	570.5	570.1
140°	590.3	591.4	592.2	593.0	593.7	594.5	594.5	594.5	594.5	594.5	594.2
142.5°	612.7	613.7	614.2	614.7	615.2	615.8	615.9	616.0	616.1	616.2	616.0
145°	643.7	644.6	645.5	646.5	647.4	648.4	648.5	648.7	648.8	648.9	648.8
147.5°	673.2	674.1	674.8	675.3	676.0	676.7	676.9	677.3	677.6	678.0	677.9
150°	691.3	692.0	692.7	693.2	693.9	694.6	695.0	695.4	695.9	696.4	696.4
152.5°	708.6	709.5	710.2	711.0	711.7	712.5	713.0	713.6	714.2	714.8	714.8
155°	732.7	733.2	733.7	734.1	734.6	735.1	735.8	736.6	737.4	738.2	738.4
157.5°	754.4	754.7	755.0	755.3	755.5	755.8	756.9	757.9	758.9	760.0	760.2
160°	767.8	768.1	768.2	768.4	768.5	768.6	769.6	770.5	771.5	772.4	772.5
162.5°	779.1	779.2	779.4	779.6	779.7	779.9	780.9	781.9	783.1	784.1	784.2
165°	794.7	794.6	794.6	794.6	794.6	794.6	795.6	796.7	797.8	798.9	799.1
167.5°	807.1	806.8	806.8	806.7	806.7	806.7	807.8	808.9	809.9	811.1	811.2
170°	814.4	814.1	813.9	813.7	813.6	813.4	814.5	815.6	816.7	817.7	817.8
172.5°	819.4	819.1	818.9	818.8	818.6	818.4	819.5	820.7	821.7	822.8	822.8
175°	825.6	825.2	824.8	824.5	824.3	823.9	825.0	826.0	827.2	828.3	828.3
177.5°	828.4	828.1	827.8	827.6	827.4	827.1	827.8	828.6	829.3	830.1	830.1
180°	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4
2.5°	1802.6	1801.5	1801.5	1796.3	1801.5	1801.5	1802.6	1808.4	1810.2	1811.3	1809.0
5°	1672.2	1670.0	1666.4	1670.0	1666.4	1670.0	1672.2	1682.2	1687.3	1692.4	1696.8
7.5°	1543.1	1534.5	1533.2	1524.7	1533.2	1534.5	1543.1	1547.9	1558.0	1569.4	1579.9
10°	1449.0	1443.2	1442.5	1428.7	1442.5	1443.2	1449.0	1461.2	1471.4	1485.1	1499.5
12.5°	1377.3	1363.5	1366.2	1358.2	1366.2	1363.5	1377.3	1377.4	1389.3	1397.8	1420.4
15°	1253.2	1253.2	1250.4	1238.0	1250.4	1253.2	1253.2	1272.7	1276.3	1290.1	1309.6
17.5°	1164.1	1162.6	1155.7	1159.1	1155.7	1162.6	1164.1	1178.4	1180.8	1199.2	1215.2
20°	1110.9	1106.6	1098.0	1098.0	1098.0	1106.6	1110.9	1118.9	1128.2	1139.1	1152.8
22.5°	1060.6	1060.4	1051.1	1054.0	1051.1	1060.4	1060.6	1068.0	1076.9	1088.8	1100.2
25°	1001.8	996.1	991.7	993.9	991.7	996.1	1001.8	1002.6	1012.7	1020.7	1027.8
27.5°	946.1	942.9	942.6	936.7	942.6	942.9	946.1	948.0	953.8	958.4	965.2
30°	913.7	906.5	908.0	904.4	908.0	906.5	913.7	914.5	917.4	920.2	928.2
32.5°	876.8	874.1	872.7	869.7	872.7	874.1	876.8	878.1	883.8	886.7	893.0
35°	826.3	827.1	823.4	824.9	823.4	827.1	826.3	827.7	828.5	831.4	837.2
37.5°	782.3	784.6	782.9	783.3	782.9	784.6	782.3	783.0	783.7	784.2	785.9
40°	753.4	753.4	753.4	755.5	753.4	753.4	753.4	751.2	752.0	751.2	751.2
42.5°	725.7	724.5	723.3	723.2	723.3	724.5	725.7	720.6	723.0	720.6	719.4
45°	678.3	680.4	681.2	677.5	681.2	680.4	678.3	676.8	674.7	673.9	673.2
47.5°	635.4	635.7	635.4	638.6	635.4	635.7	635.4	633.5	630.2	628.9	625.4
50°	605.3	603.9	605.3	603.9	605.3	603.9	605.3	601.7	599.6	595.9	593.0
52.5°	573.5	573.8	573.0	572.7	573.0	573.8	573.5	568.7	567.8	566.5	561.8
55°	523.7	525.1	524.4	524.4	524.4	525.1	523.7	520.8	520.1	515.8	511.4
57.5°	472.1	473.4	474.4	471.3	474.4	473.4	472.1	471.6	471.3	466.7	462.0
60°	436.3	439.9	439.1	437.7	439.1	439.9	436.3	437.0	434.8	432.0	429.0
62.5°	403.3	404.6	404.5	404.3	404.5	404.6	403.3	400.0	399.0	396.2	393.2
65°	352.5	353.9	351.8	353.9	351.8	353.9	352.5	350.3	345.3	343.8	340.9
67.5°	297.7	298.2	299.7	300.8	299.7	298.2	297.7	298.6	295.3	292.6	292.0
70°	263.6	263.0	265.1	267.3	265.1	263.0	263.6	262.2	260.0	257.9	255.0
72.5°	227.8	229.4	228.7	230.3	228.7	229.4	227.8	228.1	225.9	223.2	220.3
75°	175.5	177.7	177.0	179.2	177.0	177.7	175.5	177.0	175.5	172.7	169.8
77.5°	126.9	127.1	126.9	128.0	126.9	127.1	126.9	128.0	126.4	127.4	124.1
80°	96.8	95.4	93.9	96.8	93.9	95.4	96.8	96.8	94.6	96.8	94.6
82.5°	67.3	68.1	66.7	66.7	66.7	68.1	67.3	69.1	68.1	69.1	66.9
85°	31.1	30.3	28.9	28.9	28.9	30.3	31.1	31.1	33.3	31.8	31.8
87.5°	10.5	9.9	9.9	9.4	9.9	9.9	10.5	10.4	10.5	11.7	11.7
90°	23.3	23.5	23.7	23.8	23.7	23.5	23.3	23.2	23.3	23.6	23.8
92.5°	22.5	22.6	22.6	22.6	22.6	22.6	22.5	22.5	22.5	22.4	22.3
95°	44.3	44.0	43.6	43.4	43.6	44.0	44.3	44.6	44.8	44.8	44.8
97.5°	75.2	75.2	75.1	75.1	75.1	75.2	75.2	75.2	75.2	75.2	75.2
100°	96.3	96.1	96.0	95.9	96.0	96.1	96.3	96.4	96.5	96.5	96.5
102.5°	119.8	119.6	119.5	119.3	119.5	119.6	119.8	120.0	120.0	119.8	119.7
105°	155.2	155.2	155.2	155.2	155.2	155.2	155.2	155.2	155.1	154.8	154.5
107.5°	191.2	190.6	189.8	189.2	189.8	190.6	191.2	192.0	192.3	192.2	192.0
110°	216.8	216.3	215.8	215.5	215.8	216.3	216.8	217.3	217.5	217.5	217.5



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	241.7	241.3	240.9	240.6	240.9	241.3	241.7	242.0	242.3	242.7	243.1
115°	281.2	280.7	280.2	279.7	280.2	280.7	281.2	281.6	281.9	282.1	282.3
117.5°	318.5	318.0	317.5	317.1	317.5	318.0	318.5	319.0	319.4	319.8	320.2
120°	344.8	344.3	343.8	343.4	343.8	344.3	344.8	345.3	345.5	345.5	345.5
122.5°	370.1	369.9	369.5	369.2	369.5	369.9	370.1	370.5	370.9	371.3	371.6
125°	409.0	408.8	408.6	408.5	408.6	408.8	409.0	409.1	409.3	409.8	410.3
127.5°	445.7	445.3	444.8	444.3	444.8	445.3	445.7	446.3	446.8	447.3	447.9
130°	471.8	471.3	470.6	470.0	470.6	471.3	471.8	472.5	473.0	473.3	473.6
132.5°	496.2	495.6	495.1	494.6	495.1	495.6	496.2	496.6	497.2	497.9	498.6
135°	534.3	533.9	533.4	532.9	533.4	533.9	534.3	534.8	535.2	535.3	535.5
137.5°	569.5	568.9	568.3	567.6	568.3	568.9	569.5	570.1	570.5	570.6	570.7
140°	593.6	593.0	592.3	591.7	592.3	593.0	593.6	594.2	594.5	594.5	594.5
142.5°	615.4	614.7	614.2	613.5	614.2	614.7	615.4	616.0	616.2	616.1	616.0
145°	648.1	647.5	646.9	646.3	646.9	647.5	648.1	648.8	648.9	648.8	648.7
147.5°	677.3	676.7	676.1	675.5	676.1	676.7	677.3	677.9	678.0	677.6	677.3
150°	695.9	695.4	695.0	694.6	695.0	695.4	695.9	696.4	696.4	695.9	695.4
152.5°	714.2	713.6	713.0	712.5	713.0	713.6	714.2	714.8	714.8	714.2	713.6
155°	737.9	737.4	737.0	736.5	737.0	737.4	737.9	738.4	738.2	737.4	736.6
157.5°	759.4	758.7	757.9	757.1	757.9	758.7	759.4	760.2	760.0	758.9	757.9
160°	771.9	771.3	770.7	770.1	770.7	771.3	771.9	772.5	772.4	771.5	770.5
162.5°	783.4	782.8	782.0	781.3	782.0	782.8	783.4	784.2	784.1	783.1	781.9
165°	798.2	797.5	796.7	796.0	796.7	797.5	798.2	799.1	798.9	797.8	796.7
167.5°	810.4	809.5	808.8	807.9	808.8	809.5	810.4	811.2	811.1	809.9	808.9
170°	816.9	816.0	815.0	814.1	815.0	816.0	816.9	817.8	817.7	816.7	815.6
172.5°	822.0	821.0	820.1	819.2	820.1	821.0	822.0	822.8	822.8	821.7	820.7
175°	827.4	826.5	825.6	824.6	825.6	826.5	827.4	828.3	828.3	827.2	826.0
177.5°	829.3	828.6	827.8	827.1	827.8	828.6	829.3	830.1	830.1	829.3	828.6
180°	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4
2.5°	1806.1	1812.4	1822.3	1832.7	1839.0	1851.2	1854.6	1860.4	1865.6	1877.7	1890.5
5°	1701.8	1711.9	1735.7	1748.7	1766.8	1787.7	1801.5	1815.9	1831.8	1859.3	1884.5
7.5°	1590.0	1606.8	1636.4	1660.8	1686.5	1716.6	1738.1	1766.8	1790.5	1829.2	1866.1
10°	1515.4	1539.3	1566.0	1594.9	1631.0	1662.7	1693.1	1729.2	1758.1	1804.3	1847.7
12.5°	1448.4	1452.0	1490.3	1522.1	1571.5	1610.8	1645.8	1692.2	1720.5	1775.5	1821.1
15°	1331.2	1352.9	1387.6	1412.9	1471.4	1521.2	1570.3	1618.7	1651.2	1719.1	1779.0
17.5°	1232.6	1252.5	1288.1	1329.5	1371.5	1421.1	1484.7	1535.7	1579.9	1657.5	1728.3
20°	1170.2	1194.7	1230.9	1273.5	1310.3	1364.4	1419.4	1477.9	1525.5	1613.0	1696.0
22.5°	1117.0	1136.3	1165.5	1207.6	1247.8	1297.4	1357.5	1421.3	1471.2	1565.6	1649.7
25°	1042.3	1058.2	1076.9	1111.6	1157.2	1211.4	1258.3	1328.3	1401.3	1489.4	1591.3
27.5°	975.0	986.3	1002.9	1033.3	1068.6	1119.3	1171.5	1237.9	1311.3	1406.9	1514.4
30°	934.0	941.2	957.8	983.1	1017.8	1057.4	1110.2	1173.7	1248.9	1345.7	1452.6
32.5°	898.1	904.7	915.6	939.7	969.8	1003.7	1051.2	1114.8	1186.5	1281.6	1400.0
35°	844.4	849.4	858.8	878.4	894.9	928.2	967.9	1025.7	1092.9	1183.9	1306.6
37.5°	790.8	797.8	803.5	811.7	833.1	855.0	889.5	938.3	1004.2	1096.1	1213.1
40°	755.5	761.3	770.0	773.6	791.0	810.4	838.6	883.4	949.9	1033.6	1147.7
42.5°	719.7	725.5	730.7	734.9	749.9	767.1	792.4	830.9	889.8	971.2	1084.2
45°	671.0	671.8	676.8	684.8	692.0	704.3	722.4	755.5	801.1	877.6	980.1
47.5°	621.6	622.5	623.4	626.8	634.8	645.9	657.9	684.9	725.7	786.7	886.6
50°	588.7	587.2	588.7	591.5	596.6	606.1	619.7	639.2	672.5	729.5	821.2
52.5°	556.9	556.7	555.7	556.9	560.8	567.3	577.0	593.6	623.4	675.8	756.6
55°	508.5	504.9	505.6	502.8	509.3	510.7	517.9	531.6	557.6	593.7	669.6
57.5°	456.9	453.9	450.7	449.9	449.3	453.2	458.9	469.8	489.7	521.4	582.9
60°	424.0	420.4	416.0	414.6	414.6	416.8	419.7	427.6	446.4	474.6	525.1
62.5°	390.5	386.3	383.7	379.9	378.8	381.0	383.8	389.5	403.0	429.5	473.2
65°	338.7	333.8	330.1	329.4	327.9	325.7	327.3	333.0	343.8	364.8	399.4
67.5°	286.9	282.1	281.3	277.1	275.0	275.3	275.0	279.9	286.4	304.5	330.4
70°	252.8	249.2	247.8	244.1	242.7	241.3	239.8	244.1	250.6	265.8	288.2
72.5°	218.1	215.1	211.9	208.9	209.2	207.7	207.5	210.1	215.4	229.4	246.6
75°	168.3	169.0	165.4	161.8	161.1	159.7	159.7	161.8	164.0	174.8	188.5
77.5°	122.1	121.5	118.5	117.3	116.6	115.0	116.6	118.0	119.1	126.4	136.5
80°	93.2	93.2	89.5	89.5	88.9	86.7	88.9	87.4	90.3	97.6	104.7
82.5°	66.6	65.4	65.3	64.2	64.0	62.4	63.4	64.8	66.0	71.0	75.3
85°	32.5	32.5	31.8	31.1	31.8	31.1	31.8	32.5	33.3	35.4	39.0
87.5°	11.8	12.4	12.3	12.2	11.5	11.4	11.5	11.7	12.4	12.6	12.8
90°	24.1	24.5	21.0	17.6	14.2	10.8	8.2	6.3	4.4	2.5	0.7
92.5°	22.3	22.2	21.4	20.6	19.8	19.0	17.9	16.6	15.2	13.9	12.4
95°	44.8	44.8	44.5	44.1	43.8	43.5	42.6	41.0	39.5	37.9	36.4
97.5°	75.2	75.2	74.6	74.1	73.5	72.9	71.9	70.5	69.2	67.8	66.4
100°	96.5	96.5	96.0	95.6	95.1	94.6	93.8	92.6	91.3	90.1	88.8
102.5°	119.6	119.4	118.9	118.3	117.7	117.1	116.3	115.3	114.3	113.3	112.4
105°	154.2	153.9	153.5	153.3	153.0	152.6	152.2	151.7	151.3	150.8	150.3
107.5°	191.9	191.8	191.8	191.8	191.8	191.8	191.4	190.8	190.1	189.4	188.7
110°	217.5	217.5	217.5	217.5	217.5	217.5	217.1	216.1	215.2	214.2	213.3



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	243.5	243.8	243.9	244.0	244.2	244.3	243.9	243.0	242.0	241.1	240.2
115°	282.4	282.6	282.9	283.1	283.5	283.8	283.5	282.6	281.6	280.7	279.7
117.5°	320.6	320.9	321.8	322.6	323.5	324.3	324.1	322.9	321.7	320.5	319.2
120°	345.5	345.5	346.8	348.0	349.2	350.4	350.4	349.2	348.0	346.8	345.5
122.5°	372.0	372.4	373.2	374.1	374.9	375.9	375.5	374.0	372.6	371.1	369.6
125°	410.8	411.2	411.7	412.2	412.6	413.1	412.6	411.2	409.8	408.5	407.1
127.5°	448.5	449.0	449.6	450.2	450.7	451.3	450.6	448.8	447.1	445.4	443.6
130°	473.9	474.2	474.5	474.9	475.1	475.4	474.6	472.6	470.5	468.5	466.5
132.5°	499.3	499.9	499.9	499.8	499.7	499.7	498.8	497.2	495.6	493.9	492.3
135°	535.6	535.7	535.5	535.2	534.8	534.5	533.5	531.8	530.1	528.4	526.7
137.5°	570.9	571.0	570.6	570.2	569.8	569.4	568.4	567.1	565.7	564.3	562.9
140°	594.5	594.5	593.7	593.0	592.2	591.4	590.3	588.9	587.5	586.1	584.8
142.5°	615.9	615.8	615.2	614.7	614.2	613.7	612.7	611.3	609.9	608.5	607.1
145°	648.5	648.4	647.4	646.5	645.5	644.6	643.7	642.5	641.4	640.4	639.2
147.5°	676.9	676.7	676.0	675.3	674.8	674.1	673.2	671.8	670.5	669.2	668.0
150°	695.0	694.6	693.9	693.2	692.7	692.0	691.3	690.3	689.4	688.4	687.5
152.5°	713.0	712.5	711.7	711.0	710.2	709.5	708.6	707.7	706.7	705.8	704.8
155°	735.8	735.1	734.6	734.1	733.7	733.2	732.7	732.3	731.8	731.3	730.8
157.5°	756.9	755.8	755.5	755.3	755.0	754.7	754.4	754.0	753.8	753.5	753.1
160°	769.6	768.6	768.5	768.4	768.2	768.1	767.8	767.5	767.1	766.9	766.6
162.5°	780.9	779.9	779.7	779.6	779.4	779.2	779.1	779.0	779.0	778.9	778.8
165°	795.6	794.6	794.6	794.6	794.6	794.6	794.7	794.8	794.9	795.0	795.2
167.5°	807.8	806.7	806.7	806.7	806.8	806.8	807.1	807.6	808.0	808.5	809.0
170°	814.5	813.4	813.6	813.7	813.9	814.1	814.4	814.8	815.3	815.8	816.2
172.5°	819.5	818.4	818.6	818.8	818.9	819.1	819.4	819.8	820.3	820.8	821.2
175°	825.0	823.9	824.3	824.5	824.8	825.2	825.6	826.0	826.5	827.0	827.4
177.5°	827.8	827.1	827.4	827.6	827.8	828.1	828.4	828.8	829.2	829.5	829.9
180°	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4
2.5°	1889.3	1892.2	1901.4	1910.7	1921.1	1924.0	1928.6	1924.6	1923.4	1934.4	1942.5
5°	1894.6	1907.6	1933.0	1956.1	1975.6	1989.2	2003.8	2009.5	2020.3	2035.5	2054.3
7.5°	1888.6	1913.8	1953.6	1987.3	2023.9	2050.4	2071.0	2088.7	2110.1	2138.8	2170.1
10°	1881.6	1915.6	1964.0	2005.2	2049.9	2083.9	2112.0	2139.5	2171.3	2211.0	2252.2
12.5°	1869.0	1909.2	1969.7	2018.5	2075.9	2109.3	2147.3	2206.6	2240.6	2295.9	2353.9
15°	1843.3	1888.1	1972.6	2032.6	2097.6	2161.2	2231.3	2287.6	2343.9	2376.4	2458.1
17.5°	1805.3	1871.1	1964.7	2034.7	2117.2	2217.3	2296.1	2359.9	2425.0	2477.7	2518.6
20°	1774.7	1846.3	1953.1	2036.9	2135.1	2242.8	2333.1	2398.1	2454.5	2498.5	2523.8
22.5°	1736.0	1826.0	1930.0	2028.3	2153.7	2260.1	2355.0	2406.2	2453.2	2474.8	2484.4
25°	1675.1	1783.4	1901.1	2021.1	2162.7	2275.3	2362.0	2393.0	2406.8	2385.9	2351.2
27.5°	1609.3	1730.1	1867.7	2007.4	2157.1	2265.5	2327.6	2322.7	2299.4	2231.7	2177.5
30°	1560.2	1693.1	1841.2	1993.6	2143.8	2249.3	2285.4	2249.3	2196.6	2120.7	2043.4
32.5°	1508.8	1646.3	1812.9	1974.0	2119.6	2212.3	2220.2	2158.0	2076.4	1990.2	1893.8
35°	1430.9	1579.7	1759.5	1930.0	2068.0	2126.5	2091.9	1982.1	1885.3	1767.6	1636.1
37.5°	1342.9	1507.2	1687.6	1865.8	1990.7	2006.0	1920.0	1804.3	1667.8	1529.5	1374.7
40°	1277.1	1451.1	1636.8	1816.7	1927.1	1911.3	1801.5	1674.3	1511.8	1342.7	1199.0
42.5°	1218.1	1392.2	1581.3	1757.7	1846.3	1802.6	1674.3	1518.3	1343.7	1184.5	1052.8
45°	1116.0	1295.1	1488.7	1659.2	1709.8	1631.0	1461.2	1287.9	1116.0	983.1	879.1
47.5°	1016.9	1194.0	1385.7	1535.5	1553.4	1447.6	1262.1	1083.6	935.9	827.6	754.2
50°	944.1	1121.7	1311.7	1445.4	1439.5	1311.7	1121.1	951.3	827.7	740.4	691.3
52.5°	878.7	1046.6	1229.1	1350.6	1319.9	1180.5	998.5	847.8	746.3	678.0	633.5
55°	777.2	932.6	1105.9	1203.3	1147.1	992.5	838.6	717.3	642.2	590.9	556.2
57.5°	676.4	822.0	970.3	1030.5	968.2	825.5	697.2	609.2	552.7	514.7	492.2
60°	614.0	741.1	873.3	925.3	850.9	723.8	622.6	543.9	498.4	467.3	447.1
62.5°	551.6	665.4	790.0	818.4	750.4	642.9	553.3	487.9	450.4	422.8	403.8
65°	466.7	559.8	654.4	673.2	610.4	527.3	456.5	413.9	380.7	360.4	345.3
67.5°	382.7	457.5	524.5	539.7	484.7	427.1	375.9	338.7	316.2	299.4	286.6
70°	333.0	392.2	447.1	459.4	415.4	364.0	325.1	295.4	275.2	260.8	248.5
72.5°	280.4	329.8	375.4	383.7	347.7	308.6	276.5	253.3	235.4	226.1	214.4
75°	214.5	243.5	278.8	281.0	257.1	233.3	208.8	193.6	184.2	172.7	166.8
77.5°	151.4	174.1	194.3	198.2	184.1	167.9	154.1	142.1	134.2	128.8	123.5
80°	115.6	133.7	142.3	147.3	137.2	125.6	117.7	109.8	104.7	101.1	97.6
82.5°	82.7	93.8	101.9	105.8	100.3	93.3	85.4	80.9	77.0	74.0	72.7
85°	41.8	46.9	52.0	53.4	52.0	49.1	44.8	44.8	42.6	41.8	41.8
87.5°	15.0	17.6	18.0	20.2	19.5	20.2	20.8	20.9	21.1	20.5	19.8
90°	2.5	4.4	6.3	8.2	10.8	14.2	17.6	21.0	24.5	24.1	23.8
92.5°	13.9	15.2	16.6	17.9	19.0	19.8	20.6	21.4	22.2	22.3	22.3
95°	37.9	39.5	41.0	42.6	43.5	43.8	44.1	44.5	44.8	44.8	44.8
97.5°	67.8	69.2	70.5	71.9	72.9	73.5	74.1	74.6	75.2	75.2	75.2
100°	90.1	91.3	92.6	93.8	94.6	95.1	95.6	96.0	96.5	96.5	96.5
102.5°	113.3	114.3	115.3	116.3	117.1	117.7	118.3	118.9	119.4	119.6	119.7
105°	150.8	151.3	151.7	152.2	152.6	153.0	153.3	153.5	153.9	154.2	154.5
107.5°	189.4	190.1	190.8	191.4	191.8	191.8	191.8	191.8	191.8	191.9	192.0
110°	214.2	215.2	216.1	217.1	217.5	217.5	217.5	217.5	217.5	217.5	217.5



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	241.1	242.0	243.0	243.9	244.3	244.2	244.0	243.9	243.8	243.5	243.1
115°	280.7	281.6	282.6	283.5	283.8	283.5	283.1	282.9	282.6	282.4	282.3
117.5°	320.5	321.7	322.9	324.1	324.3	323.5	322.6	321.8	320.9	320.6	320.2
120°	346.8	348.0	349.2	350.4	350.4	349.2	348.0	346.8	345.5	345.5	345.5
122.5°	371.1	372.6	374.0	375.5	375.9	374.9	374.1	373.2	372.4	372.0	371.6
125°	408.5	409.8	411.2	412.6	413.1	412.6	412.2	411.7	411.2	410.8	410.3
127.5°	445.4	447.1	448.8	450.6	451.3	450.7	450.2	449.6	449.0	448.5	447.9
130°	468.5	470.5	472.6	474.6	475.4	475.1	474.9	474.5	474.2	473.9	473.6
132.5°	493.9	495.6	497.2	498.8	499.7	499.7	499.8	499.9	499.9	499.3	498.6
135°	528.4	530.1	531.8	533.5	534.5	534.8	535.2	535.5	535.7	535.6	535.5
137.5°	564.3	565.7	567.1	568.4	569.4	569.8	570.2	570.6	571.0	570.9	570.7
140°	586.1	587.5	588.9	590.3	591.4	592.2	593.0	593.7	594.5	594.5	594.5
142.5°	608.5	609.9	611.3	612.7	613.7	614.2	614.7	615.2	615.8	615.9	616.0
145°	640.4	641.4	642.5	643.7	644.6	645.5	646.5	647.4	648.4	648.5	648.7
147.5°	669.2	670.5	671.8	673.2	674.1	674.8	675.3	676.0	676.7	676.9	677.3
150°	688.4	689.4	690.3	691.3	692.0	692.7	693.2	693.9	694.6	695.0	695.4
152.5°	705.8	706.7	707.7	708.6	709.5	710.2	711.0	711.7	712.5	713.0	713.6
155°	731.3	731.8	732.3	732.7	733.2	733.7	734.1	734.6	735.1	735.8	736.6
157.5°	753.5	753.8	754.0	754.4	754.7	755.0	755.3	755.5	755.8	756.9	757.9
160°	766.9	767.1	767.5	767.8	768.1	768.2	768.4	768.5	768.6	769.6	770.5
162.5°	778.9	779.0	779.0	779.1	779.2	779.4	779.6	779.7	779.9	780.9	781.9
165°	795.0	794.9	794.8	794.7	794.6	794.6	794.6	794.6	794.6	795.6	796.7
167.5°	808.5	808.0	807.6	807.1	806.8	806.8	806.7	806.7	806.7	807.8	808.9
170°	815.8	815.3	814.8	814.4	814.1	813.9	813.7	813.6	813.4	814.5	815.6
172.5°	820.8	820.3	819.8	819.4	819.1	818.9	818.8	818.6	818.4	819.5	820.7
175°	827.0	826.5	826.0	825.6	825.2	824.8	824.5	824.3	823.9	825.0	826.0
177.5°	829.5	829.2	828.8	828.4	828.1	827.8	827.6	827.4	827.1	827.8	828.6
180°	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4	1879.4
2.5°	1949.4	1957.5	1957.5	1958.6	1967.8	1966.7	1966.1
5°	2074.5	2086.8	2088.2	2101.2	2109.9	2107.0	2099.0
7.5°	2192.5	2215.4	2232.7	2242.4	2253.8	2260.9	2257.7
10°	2286.1	2319.4	2339.6	2353.3	2369.9	2382.2	2377.8
12.5°	2371.1	2410.6	2438.5	2461.9	2464.1	2479.8	2469.2
15°	2503.6	2545.4	2549.8	2567.1	2580.9	2579.4	2580.1
17.5°	2547.3	2560.8	2563.5	2563.9	2564.1	2559.0	2548.1
20°	2531.8	2526.7	2514.4	2505.0	2488.4	2486.2	2471.8
22.5°	2457.8	2441.8	2410.9	2390.6	2364.7	2358.0	2353.9
25°	2312.2	2276.7	2227.6	2180.7	2167.7	2142.4	2149.7
27.5°	2112.3	2057.2	2004.0	1965.9	1931.4	1893.5	1904.3
30°	1971.9	1909.8	1834.7	1776.9	1740.0	1703.9	1697.4
32.5°	1804.3	1713.4	1629.6	1578.7	1522.2	1499.4	1474.4
35°	1515.4	1426.5	1343.5	1272.0	1230.9	1199.0	1170.2
37.5°	1255.6	1153.3	1086.2	1028.3	998.5	980.3	985.0
40°	1094.3	1004.8	955.6	911.5	884.1	871.1	874.0
42.5°	963.7	896.6	856.2	826.0	806.7	799.5	797.8
45°	815.5	778.0	744.7	727.4	718.0	710.0	705.0
47.5°	714.4	683.7	665.0	654.7	646.5	638.4	638.2
50°	653.7	633.5	620.5	609.6	603.1	597.4	602.4
52.5°	607.5	589.0	576.0	566.3	563.8	558.6	558.5
55°	538.9	524.4	515.0	506.3	502.0	499.1	495.5
57.5°	476.5	462.7	454.0	448.6	440.4	437.4	436.3
60°	432.0	421.1	412.5	405.2	401.6	395.9	395.9
62.5°	390.9	380.1	372.0	366.5	360.6	358.3	358.8
65°	331.6	322.9	314.9	309.2	307.7	303.4	304.8
67.5°	276.9	271.2	262.8	259.6	256.8	254.6	252.8
70°	240.5	234.8	230.5	226.1	223.9	223.9	223.9
72.5°	209.9	202.9	200.4	194.9	196.1	193.9	191.5
75°	162.5	158.2	156.0	153.8	150.2	150.2	150.2
77.5°	119.6	118.3	115.7	113.4	112.5	111.8	112.1
80°	92.5	91.7	90.3	90.3	88.9	88.1	86.7
82.5°	71.1	69.2	68.3	67.8	67.5	67.3	67.0
85°	40.4	39.0	39.0	39.7	38.3	38.3	39.0
87.5°	20.3	20.3	19.7	19.7	20.3	19.8	19.8
90°	23.6	23.3	23.2	23.3	23.5	23.7	23.8
92.5°	22.4	22.5	22.5	22.5	22.6	22.6	22.6
95°	44.8	44.8	44.6	44.3	44.0	43.6	43.4
97.5°	75.2	75.2	75.2	75.2	75.2	75.1	75.1
100°	96.5	96.5	96.4	96.3	96.1	96.0	95.9
102.5°	119.8	120.0	120.0	119.8	119.6	119.5	119.3
105°	154.8	155.1	155.2	155.2	155.2	155.2	155.2
107.5°	192.2	192.3	192.0	191.2	190.6	189.8	189.2
110°	217.5	217.5	217.3	216.8	216.3	215.8	215.5



TEST NUMBER: P331592-830

CATALOG NUMBER: S122DIW-S1005D710U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	242.7	242.3	242.0	241.7	241.3	240.9	240.6
115°	282.1	281.9	281.6	281.2	280.7	280.2	279.7
117.5°	319.8	319.4	319.0	318.5	318.0	317.5	317.1
120°	345.5	345.5	345.3	344.8	344.3	343.8	343.4
122.5°	371.3	370.9	370.5	370.1	369.9	369.5	369.2
125°	409.8	409.3	409.1	409.0	408.8	408.6	408.5
127.5°	447.3	446.8	446.3	445.7	445.3	444.8	444.3
130°	473.3	473.0	472.5	471.8	471.3	470.6	470.0
132.5°	497.9	497.2	496.6	496.2	495.6	495.1	494.6
135°	535.3	535.2	534.8	534.3	533.9	533.4	532.9
137.5°	570.6	570.5	570.1	569.5	568.9	568.3	567.6
140°	594.5	594.5	594.2	593.6	593.0	592.3	591.7
142.5°	616.1	616.2	616.0	615.4	614.7	614.2	613.5
145°	648.8	648.9	648.8	648.1	647.5	646.9	646.3
147.5°	677.6	678.0	677.9	677.3	676.7	676.1	675.5
150°	695.9	696.4	696.4	695.9	695.4	695.0	694.6
152.5°	714.2	714.8	714.8	714.2	713.6	713.0	712.5
155°	737.4	738.2	738.4	737.9	737.4	737.0	736.5
157.5°	758.9	760.0	760.2	759.4	758.7	757.9	757.1
160°	771.5	772.4	772.5	771.9	771.3	770.7	770.1
162.5°	783.1	784.1	784.2	783.4	782.8	782.0	781.3
165°	797.8	798.9	799.1	798.2	797.5	796.7	796.0
167.5°	809.9	811.1	811.2	810.4	809.5	808.8	807.9
170°	816.7	817.7	817.8	816.9	816.0	815.0	814.1
172.5°	821.7	822.8	822.8	822.0	821.0	820.1	819.2
175°	827.2	828.3	828.3	827.4	826.5	825.6	824.6
177.5°	829.3	830.1	830.1	829.3	828.6	827.8	827.1
180°	828.8	828.8	828.8	828.8	828.8	828.8	828.8

(END OF REPORT)