

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331601-830

Luminaire Tested: **S122DIW-S1005D970U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331601-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIW-S1005D970U830-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 970 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7472.6 lumens  
Efficiency: N/A  
Efficacy: 110.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 67.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331601-830

CATALOG NUMBER: S122DIW-S1005D970U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

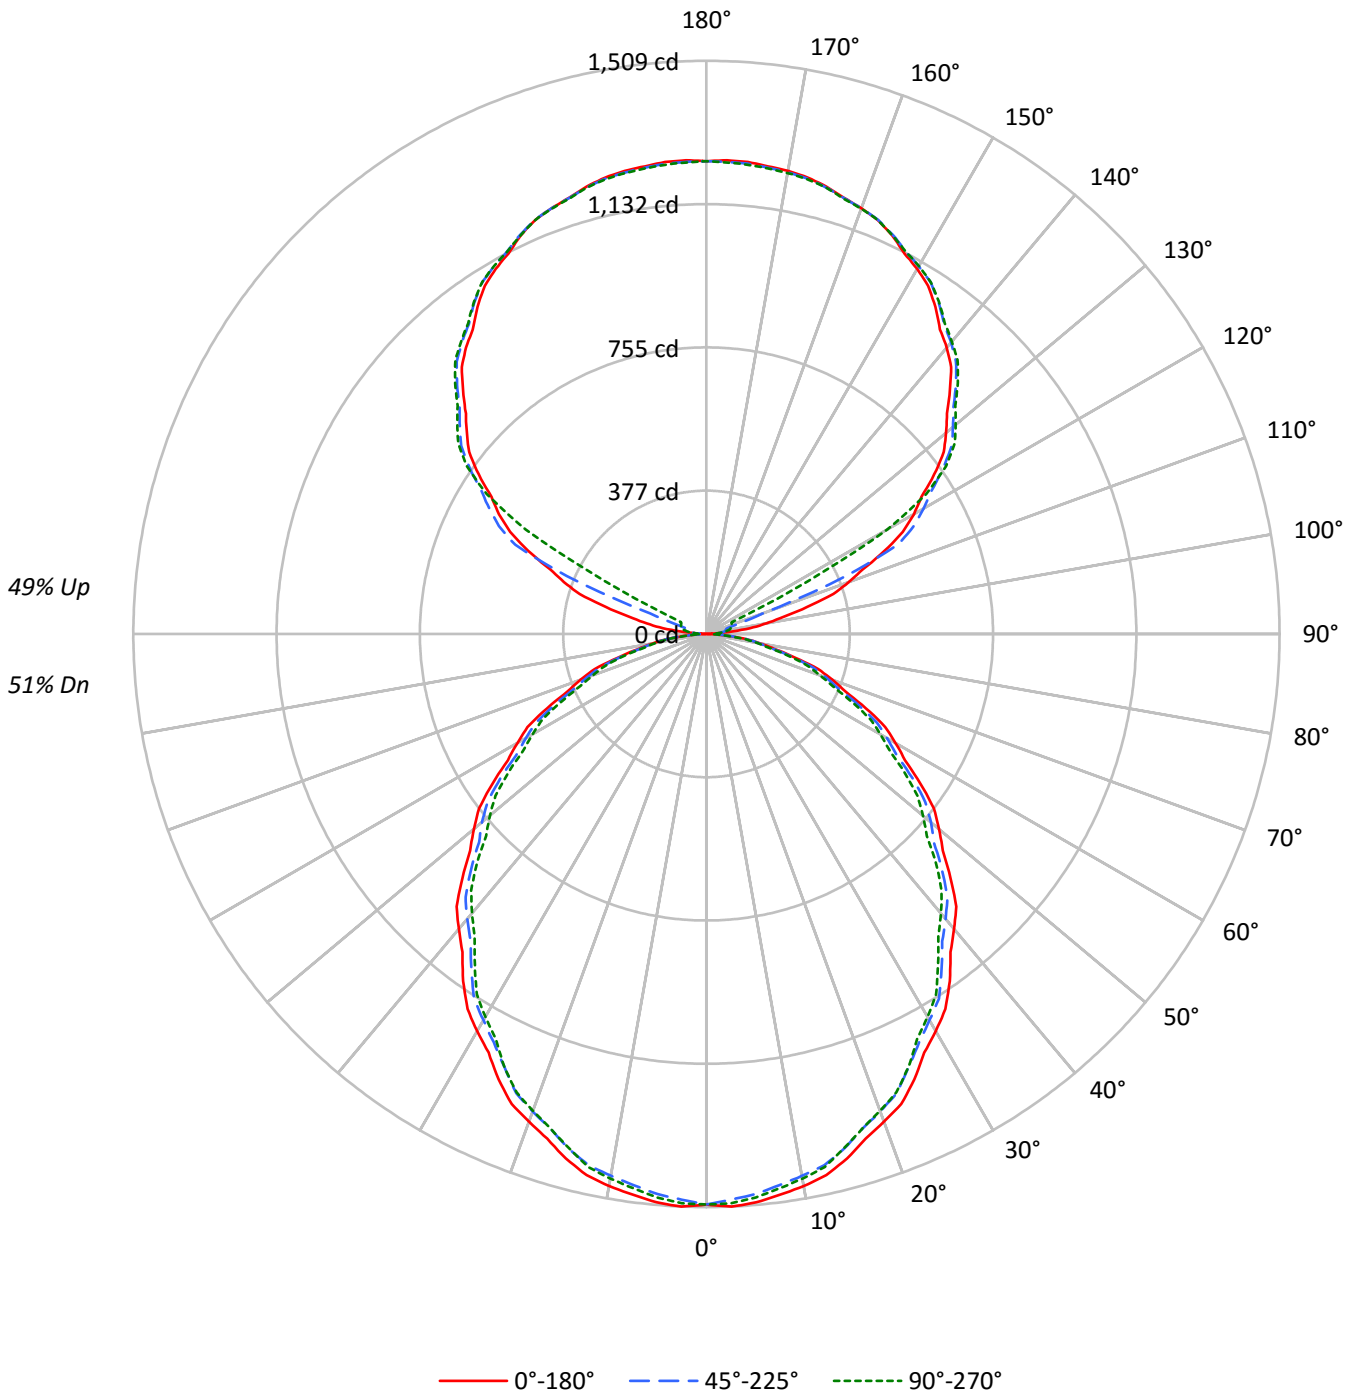



TEST NUMBER: P331601-830

CATALOG NUMBER: S122DIW-S1005D970U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	98	94	90	86	90	87	83	80	74	71	69	62	60	58	51	49	48	43
2	89	82	76	70	82	76	70	66	65	61	57	54	51	49	44	42	41	36
3	81	72	65	59	75	67	60	55	57	52	48	48	44	41	39	37	35	31
4	75	64	56	50	69	59	52	47	51	45	41	43	39	35	35	32	30	26
5	68	57	49	43	63	53	46	40	45	40	35	38	34	31	32	29	26	23
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	26	23	20
7	58	46	38	32	54	43	36	31	37	31	27	31	27	24	26	23	20	18
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	21	18	16
9	50	38	31	26	47	36	29	24	31	25	22	27	22	19	22	19	17	14
10	47	35	28	23	44	33	26	22	29	23	19	25	20	17	21	17	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	24254	24254	24254
5°	24347	23995	24136
10°	24202	23753	23871
15°	23903	23445	23422
20°	23479	22983	22957
25°	23058	22413	22413
30°	22514	21893	21705
35°	22007	21268	20954
40°	21372	20643	20244
45°	20747	20021	19527
50°	20065	19376	18686
55°	19356	18624	17931
60°	18564	17725	17073
65°	17712	16829	16061
70°	16636	15753	15002
75°	15140	14504	14148
80°	13436	13036	12357
85°	10967	10448	9355



TEST NUMBER: P331601-830

CATALOG NUMBER: S122DIW-S1005D970U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	141.3	1.9
10°-20°	397.5	5.3
20°-30°	584.2	7.8
30°-40°	678.6	9.1
40°-50°	677.9	9.1
50°-60°	591.2	7.9
60°-70°	437.1	5.8
70°-80°	247.6	3.3
80°-90°	69.6	0.9
90°-100°	41.5	0.6
100°-110°	152.3	2.0
110°-120°	407.0	5.4
120°-130°	671.8	9.0
130°-140°	714.5	9.6
140°-150°	664.1	8.9
150°-160°	533.9	7.1
160°-170°	344.1	4.6
170°-180°	118.4	1.6
0°-30°	1123.0	15.0
0°-40°	1801.6	24.1
0°-60°	3070.7	41.1
0°-90°	3825.0	51.2
90°-120°	600.8	8.0
90°-150°	2651.1	35.5
90°-180°	3648.0	48.8
0°-180°	7472.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1502	1502	1502	1502	1502	
5°	1502	1496	1480	1491	1489	142
15°	1430	1421	1403	1408	1401	402
25°	1294	1282	1258	1261	1258	595
35°	1116	1102	1079	1070	1063	697
45°	909	898	877	862	855	701
55°	688	678	662	645	637	615
65°	464	455	440	428	420	458
75°	243	240	232	225	227	259
85°	59	58	56	52	50	68
90°	1	11	18	22	24	6
95°	58	31	35	39	39	72
105°	274	286	55	64	68	293
115°	518	534	556	158	74	510
125°	732	744	761	767	770	653
135°	906	920	929	937	936	700
145°	1051	1051	1066	1071	1067	657
155°	1157	1150	1160	1165	1158	533
165°	1220	1215	1217	1222	1217	344
175°	1247	1242	1243	1248	1240	119
180°	1245	1245	1245	1245	1245	



TEST NUMBER: P331601-830

CATALOG NUMBER: S122DIW-S1005D970U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2
2.5°	1509.2	1507.9	1506.7	1505.3	1504.0	1502.0	1499.2	1496.4	1493.6	1490.7	1493.3
5°	1502.2	1501.0	1499.7	1498.4	1497.1	1494.7	1491.2	1487.6	1484.1	1480.5	1483.2
7.5°	1488.9	1487.0	1485.0	1483.0	1481.0	1478.2	1474.6	1471.0	1467.4	1463.9	1466.4
10°	1476.2	1474.0	1471.8	1469.5	1467.3	1464.2	1460.4	1456.5	1452.6	1448.8	1451.4
12.5°	1459.0	1456.9	1454.9	1452.9	1451.0	1448.0	1444.2	1440.3	1436.5	1432.7	1434.5
15°	1430.0	1428.1	1426.2	1424.3	1422.3	1419.3	1415.1	1410.9	1406.7	1402.6	1403.9
17.5°	1393.1	1391.1	1389.2	1387.2	1385.3	1382.2	1378.0	1373.8	1369.5	1365.4	1366.8
20°	1366.5	1364.5	1362.6	1360.7	1358.8	1355.6	1351.0	1346.6	1342.1	1337.6	1338.5
22.5°	1339.9	1337.2	1334.5	1331.8	1329.1	1325.7	1321.4	1317.2	1313.0	1308.7	1308.9
25°	1294.3	1291.7	1289.1	1286.6	1284.0	1280.0	1274.5	1269.0	1263.6	1258.1	1258.8
27.5°	1242.3	1239.9	1237.7	1235.3	1233.0	1229.7	1225.4	1221.1	1216.8	1212.5	1211.5
30°	1207.6	1205.0	1202.4	1199.9	1197.3	1193.6	1188.8	1184.0	1179.2	1174.3	1173.4
32.5°	1170.6	1168.6	1166.5	1164.4	1162.3	1158.9	1153.8	1148.7	1143.6	1138.5	1136.8
35°	1116.5	1113.3	1110.1	1106.9	1103.7	1099.6	1094.4	1089.3	1084.2	1079.0	1077.1
37.5°	1055.6	1052.8	1050.0	1047.2	1044.3	1040.4	1035.2	1030.1	1024.9	1019.8	1017.4
40°	1014.0	1011.4	1008.9	1006.4	1003.7	999.9	994.8	989.7	984.5	979.4	976.5
42.5°	973.6	971.0	968.5	965.9	963.3	959.4	954.3	949.1	944.1	938.9	935.8
45°	908.6	906.3	904.1	901.8	899.6	896.1	891.3	886.5	881.7	876.8	873.3
47.5°	843.9	841.8	839.6	837.5	835.4	831.8	826.8	821.8	816.8	811.8	808.0
50°	798.8	797.2	795.6	794.0	792.4	789.3	784.9	780.3	775.8	771.4	766.9
52.5°	754.9	752.8	750.6	748.6	746.4	743.2	739.0	734.7	730.6	726.3	722.6
55°	687.6	685.6	683.7	681.8	679.9	676.9	673.2	669.3	665.4	661.6	657.7
57.5°	620.0	618.4	616.9	615.4	613.8	611.0	606.7	602.5	598.2	594.0	590.2
60°	574.9	573.6	572.3	571.1	569.8	566.8	562.4	557.9	553.4	548.9	545.4
62.5°	531.0	529.0	526.9	524.8	522.7	520.0	516.5	513.1	509.6	506.1	502.8
65°	463.6	461.8	459.9	457.9	456.0	453.4	450.2	447.0	443.7	440.5	437.7
67.5°	395.2	393.7	392.1	390.6	389.1	386.8	383.9	381.1	378.1	375.3	373.1
70°	352.4	351.2	349.9	348.6	347.3	345.3	342.3	339.4	336.6	333.7	331.4
72.5°	308.5	307.3	305.9	304.7	303.4	301.8	300.0	298.1	296.2	294.4	292.1
75°	242.7	242.0	241.4	240.7	240.1	238.9	237.3	235.7	234.1	232.5	230.6
77.5°	183.7	182.7	181.5	180.5	179.4	178.5	177.9	177.2	176.5	176.0	174.9
80°	144.5	144.1	143.8	143.5	143.2	142.7	142.0	141.4	140.7	140.2	139.1
82.5°	107.4	107.4	107.4	107.3	107.2	107.0	106.6	106.2	105.8	105.5	104.2
85°	59.2	58.9	58.6	58.2	58.0	57.6	57.3	56.9	56.6	56.4	55.3
87.5°	21.0	20.9	20.8	20.7	20.6	20.5	20.4	20.2	20.0	19.8	19.2
90°	0.9	3.1	5.3	7.5	9.7	11.6	13.2	14.8	16.4	18.0	19.0
92.5°	18.2	18.0	17.8	17.6	17.4	17.7	18.5	19.3	20.1	20.9	21.4
95°	58.5	51.9	45.3	38.7	32.1	29.5	30.9	32.3	33.7	35.2	36.1
97.5°	116.2	97.6	79.0	60.3	41.8	34.0	37.3	40.5	43.7	47.0	47.8
100°	159.4	132.0	104.5	77.2	49.8	37.7	41.1	44.5	48.0	51.4	53.0
102.5°	207.0	201.1	195.4	189.5	183.7	166.6	138.2	109.7	81.2	52.8	54.9
105°	273.8	279.8	285.8	291.8	297.8	273.5	218.9	164.2	109.6	55.0	57.1
107.5°	350.0	354.9	359.7	364.5	369.4	339.0	273.5	207.9	142.4	76.9	74.6
110°	399.0	403.2	407.4	411.6	415.8	389.0	331.1	273.3	215.5	157.6	137.6



TEST NUMBER: P331601-830

CATALOG NUMBER: S122DIW-S1005D970U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	445.1	448.8	452.5	456.3	460.0	454.7	440.5	426.1	411.8	397.6	324.5
115°	517.8	521.2	524.7	528.1	531.5	535.6	540.6	545.6	550.7	555.7	463.0
117.5°	582.9	586.7	590.5	594.3	598.1	601.7	605.2	608.6	612.1	615.5	593.0
120°	630.5	633.5	636.4	639.4	642.4	645.7	649.3	653.0	656.6	660.2	662.6
122.5°	670.8	673.9	677.1	680.2	683.4	687.0	690.9	694.8	698.7	702.7	704.1
125°	732.2	734.8	737.4	740.0	742.6	745.8	749.6	753.5	757.2	761.0	762.4
127.5°	787.9	790.8	793.6	796.5	799.4	802.3	805.1	807.9	810.8	813.6	815.7
130°	823.2	826.4	829.6	832.7	835.9	838.7	840.8	843.1	845.3	847.5	849.7
132.5°	859.2	862.0	864.7	867.3	870.1	872.5	874.8	876.9	879.1	881.4	883.3
135°	906.1	909.3	912.5	915.7	918.9	921.3	923.1	924.9	926.7	928.6	930.6
137.5°	953.4	955.6	957.9	960.2	962.3	964.5	966.6	968.6	970.6	972.7	974.7
140°	984.4	986.0	987.6	989.2	990.8	992.7	994.9	997.1	999.3	1001.5	1003.3
142.5°	1010.3	1011.7	1013.2	1014.6	1016.1	1018.0	1020.6	1023.1	1025.7	1028.1	1029.8
145°	1051.0	1050.8	1050.7	1050.5	1050.3	1051.9	1055.3	1058.7	1062.1	1065.5	1066.9
147.5°	1086.6	1085.7	1085.0	1084.2	1083.5	1084.8	1088.2	1091.5	1094.9	1098.3	1099.3
150°	1109.6	1108.1	1106.7	1105.4	1104.0	1104.8	1108.1	1111.3	1114.5	1117.7	1118.9
152.5°	1129.1	1127.5	1125.9	1124.4	1122.8	1123.5	1126.5	1129.6	1132.7	1135.7	1136.9
155°	1157.3	1155.5	1153.7	1151.9	1150.1	1150.4	1152.8	1155.2	1157.6	1160.0	1161.2
157.5°	1179.5	1178.0	1176.4	1174.9	1173.4	1173.5	1175.2	1176.9	1178.5	1180.2	1181.6
160°	1192.4	1191.3	1190.1	1188.8	1187.6	1187.6	1188.8	1190.1	1191.3	1192.4	1193.6
162.5°	1204.0	1202.8	1201.6	1200.3	1199.2	1199.1	1200.1	1201.2	1202.2	1203.2	1204.6
165°	1219.5	1218.2	1217.0	1215.9	1214.7	1214.4	1214.9	1215.5	1216.2	1216.7	1218.1
167.5°	1231.0	1229.7	1228.6	1227.4	1226.2	1225.9	1226.4	1227.0	1227.6	1228.1	1229.5
170°	1237.5	1236.2	1235.1	1233.9	1232.7	1232.3	1232.7	1233.0	1233.5	1233.9	1235.3
172.5°	1241.8	1240.6	1239.3	1238.2	1237.0	1236.6	1237.0	1237.4	1237.7	1238.2	1239.6
175°	1247.4	1245.9	1244.5	1243.2	1241.8	1241.2	1241.7	1242.1	1242.5	1242.8	1244.3
177.5°	1248.3	1247.2	1246.0	1244.9	1243.8	1243.3	1243.5	1243.6	1243.8	1244.0	1245.1
180°	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6



TEST NUMBER: P331601-830

CATALOG NUMBER: S122DIW-S1005D970U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2
2.5°	1495.8	1498.4	1501.0	1502.0	1501.5	1501.0	1500.4	1500.0
5°	1485.7	1488.3	1490.8	1491.9	1491.2	1490.5	1489.9	1489.2
7.5°	1469.0	1471.5	1474.1	1475.1	1474.3	1473.7	1472.9	1472.3
10°	1454.0	1456.5	1459.1	1459.9	1459.0	1457.9	1457.0	1456.0
12.5°	1436.2	1438.0	1439.8	1440.4	1439.6	1439.0	1438.2	1437.6
15°	1405.1	1406.5	1407.7	1407.6	1406.0	1404.4	1402.8	1401.2
17.5°	1368.3	1369.8	1371.2	1371.2	1369.6	1368.1	1366.6	1365.0
20°	1339.5	1340.5	1341.4	1341.2	1340.0	1338.7	1337.5	1336.1
22.5°	1309.1	1309.3	1309.5	1309.2	1308.4	1307.7	1306.8	1306.1
25°	1259.4	1260.1	1260.7	1260.7	1260.1	1259.4	1258.8	1258.1
27.5°	1210.6	1209.6	1208.6	1207.4	1205.9	1204.3	1202.8	1201.3
30°	1172.4	1171.5	1170.5	1169.4	1168.1	1166.8	1165.5	1164.2
32.5°	1135.1	1133.3	1131.6	1130.1	1128.8	1127.6	1126.2	1124.9
35°	1075.2	1073.3	1071.3	1069.6	1068.0	1066.4	1064.7	1063.1
37.5°	1015.0	1012.7	1010.3	1008.3	1006.8	1005.2	1003.7	1002.2
40°	973.6	970.7	967.8	965.7	964.4	963.2	961.9	960.5
42.5°	932.6	929.4	926.3	923.9	922.1	920.3	918.5	916.6
45°	869.8	866.2	862.7	860.3	858.9	857.7	856.4	855.2
47.5°	804.4	800.6	796.9	794.1	792.2	790.4	788.5	786.6
50°	762.3	757.9	753.4	750.4	748.8	747.2	745.6	743.9
52.5°	718.9	715.1	711.4	708.5	706.3	704.3	702.1	700.0
55°	653.8	650.0	646.2	643.5	641.9	640.3	638.7	637.0
57.5°	586.4	582.6	578.8	576.3	575.1	573.9	572.7	571.5
60°	541.9	538.3	534.8	532.5	531.6	530.7	529.6	528.7
62.5°	499.6	496.3	493.0	490.8	489.6	488.3	487.1	485.9
65°	434.8	431.9	429.0	426.8	425.2	423.6	422.0	420.4
67.5°	370.8	368.5	366.3	364.5	363.3	361.9	360.7	359.4
70°	329.1	327.0	324.7	322.9	321.6	320.4	319.1	317.8
72.5°	289.9	287.7	285.4	283.8	282.8	281.7	280.7	279.7
75°	228.8	226.8	224.9	224.2	224.9	225.5	226.1	226.8
77.5°	174.0	173.1	172.1	171.2	170.2	169.4	168.4	167.6
80°	138.2	137.2	136.3	135.4	134.8	134.2	133.6	132.9
82.5°	103.0	101.8	100.6	99.9	99.7	99.6	99.5	99.3
85°	54.4	53.4	52.5	51.8	51.6	51.2	50.9	50.5
87.5°	18.7	18.1	17.5	17.2	17.0	16.8	16.6	16.4
90°	20.0	21.0	22.1	22.7	23.1	23.5	23.9	24.3
92.5°	22.0	22.4	23.0	23.4	23.6	23.8	24.0	24.3
95°	37.1	38.2	39.1	39.5	39.3	39.1	38.9	38.7
97.5°	48.6	49.4	50.2	50.7	51.0	51.2	51.5	51.7
100°	54.6	56.2	57.8	58.7	59.1	59.6	59.9	60.3
102.5°	56.9	59.0	61.1	62.4	63.0	63.5	64.1	64.7
105°	59.4	61.5	63.7	65.2	66.1	66.8	67.7	68.4
107.5°	72.4	70.2	68.0	67.2	68.1	68.8	69.7	70.4
110°	117.5	97.6	77.6	68.0	68.7	69.6	70.3	71.2





TEST NUMBER: P331601-830

CATALOG NUMBER: S122DIW-S1005D970U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	251.5	178.5	105.5	69.3	69.9	70.6	71.3	71.9
115°	370.3	277.7	185.0	131.5	117.1	102.6	88.2	73.9
117.5°	570.6	548.3	525.8	491.0	443.6	396.2	348.9	301.5
120°	665.0	667.3	669.8	657.4	630.5	603.4	576.4	549.4
122.5°	705.6	707.0	708.4	706.5	701.3	696.1	690.8	685.6
125°	763.8	765.3	766.7	767.6	768.3	768.8	769.4	770.1
127.5°	817.7	819.7	821.8	822.8	823.0	823.1	823.2	823.3
130°	851.9	854.1	856.3	857.3	857.1	856.9	856.7	856.5
132.5°	885.1	887.0	888.9	889.8	889.5	889.3	889.1	888.9
135°	932.6	934.5	936.5	937.4	937.0	936.5	936.1	935.8
137.5°	976.6	978.5	980.5	981.2	980.5	979.8	979.1	978.5
140°	1005.1	1006.9	1008.7	1009.1	1008.1	1007.1	1006.1	1005.1
142.5°	1031.4	1033.1	1034.7	1035.0	1034.1	1033.0	1032.1	1031.0
145°	1068.3	1069.7	1071.0	1071.3	1070.3	1069.2	1068.3	1067.2
147.5°	1100.3	1101.4	1102.4	1102.5	1101.6	1100.8	1099.9	1099.1
150°	1120.1	1121.2	1122.5	1122.6	1121.6	1120.6	1119.6	1118.6
152.5°	1138.1	1139.3	1140.5	1140.5	1139.2	1137.8	1136.5	1135.2
155°	1162.4	1163.6	1164.8	1164.6	1163.0	1161.4	1159.8	1158.2
157.5°	1182.9	1184.3	1185.6	1185.5	1183.9	1182.4	1180.8	1179.3
160°	1194.9	1196.0	1197.2	1197.1	1195.7	1194.3	1193.0	1191.6
162.5°	1206.0	1207.3	1208.7	1208.5	1206.7	1205.0	1203.3	1201.6
165°	1219.6	1221.0	1222.4	1222.4	1221.0	1219.6	1218.1	1216.7
167.5°	1230.9	1232.3	1233.7	1233.5	1231.7	1229.9	1228.1	1226.3
170°	1236.7	1238.0	1239.4	1239.3	1237.5	1235.7	1233.9	1232.1
172.5°	1241.0	1242.4	1243.8	1243.6	1241.8	1240.0	1238.2	1236.4
175°	1245.7	1247.1	1248.5	1248.2	1246.1	1244.2	1242.2	1240.2
177.5°	1246.2	1247.3	1248.4	1248.3	1246.8	1245.4	1244.0	1242.6
180°	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6

(END OF REPORT)