

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331541-830

Luminaire Tested: **S122DIW-S675D970U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331541-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S675D970U830-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 970 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6196.5 lumens
Efficiency: N/A
Efficacy: 117.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 52.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331541-830
CATALOG NUMBER: S122DIW-S675D970U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

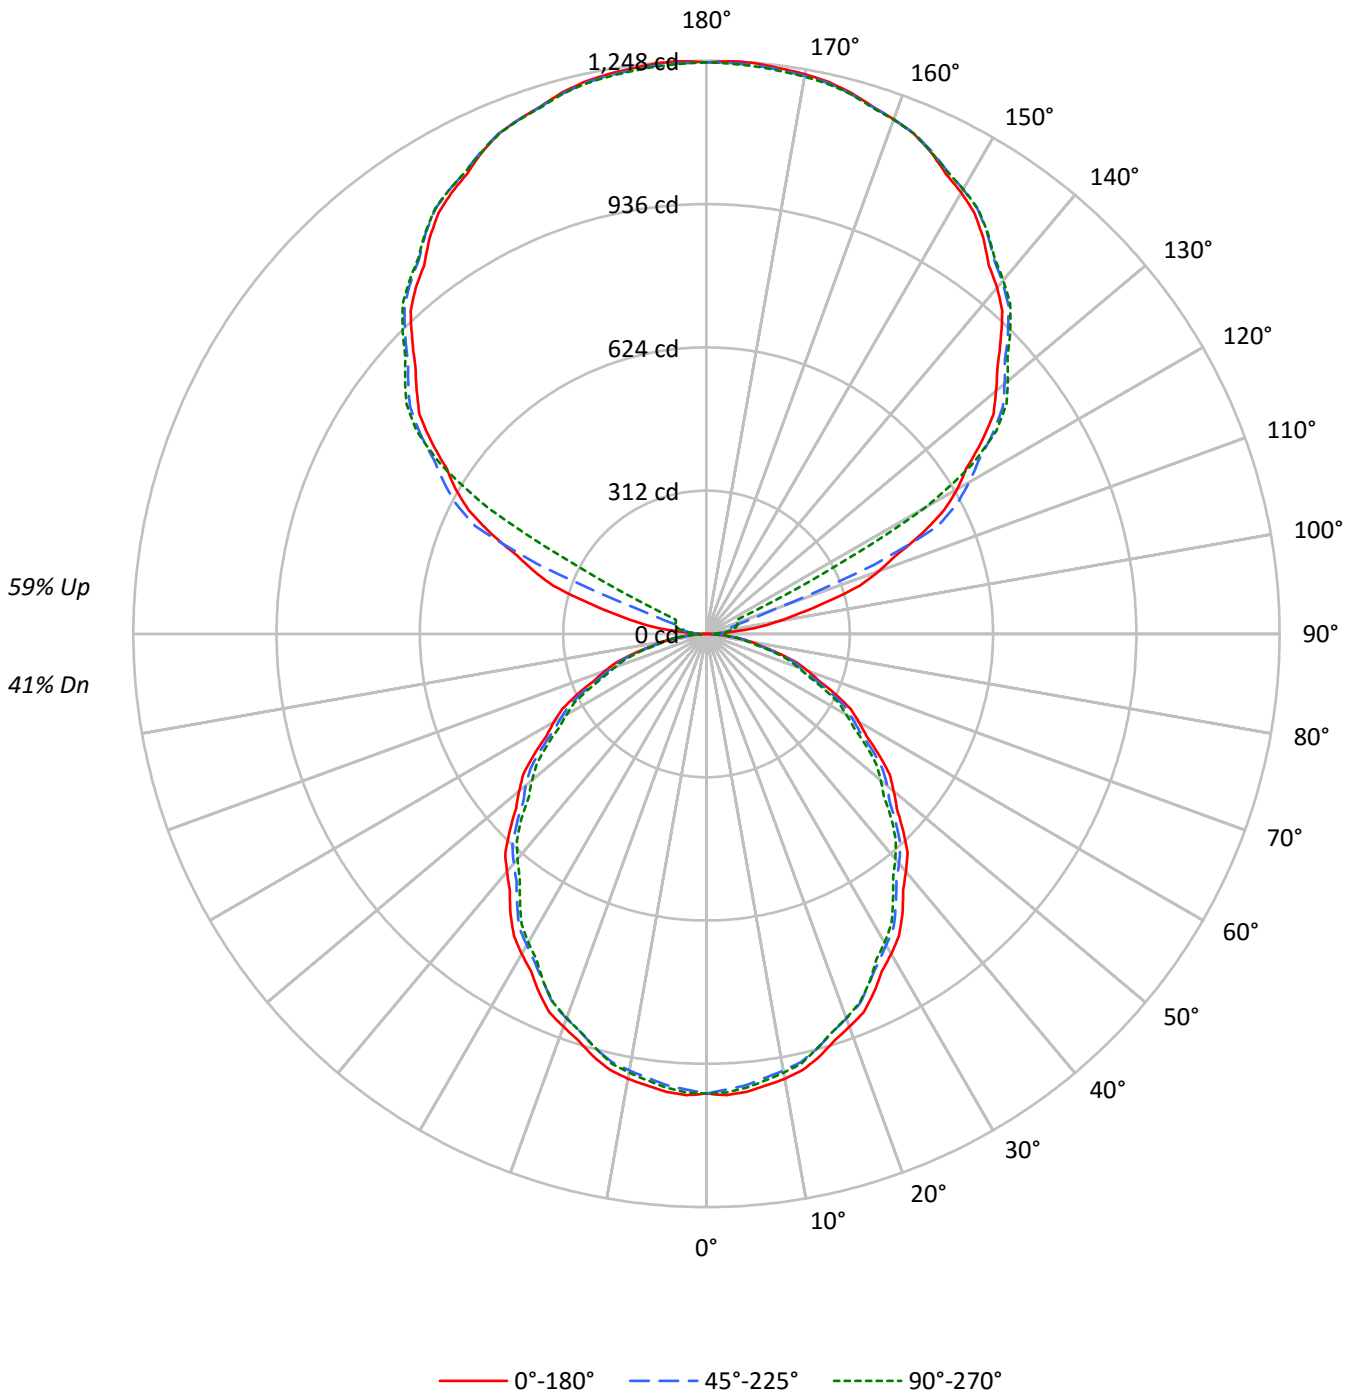



TEST NUMBER: P331541-830

CATALOG NUMBER: S122DIW-S675D970U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48	41
1	96	92	88	84	87	84	80	77	69	66	64	55	53	52	42	41	40	35
2	87	80	74	69	79	73	68	63	60	56	53	48	46	43	37	36	34	29
3	80	70	63	57	72	64	58	53	53	48	45	43	39	37	33	31	29	25
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	30	27	25	21
5	67	55	47	41	61	51	44	38	42	37	33	34	30	27	27	24	22	18
6	61	50	42	36	56	45	38	33	38	33	29	31	27	24	24	21	19	16
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17	14
8	53	40	33	28	48	37	31	26	31	26	22	26	22	19	20	17	15	13
9	49	37	30	25	45	34	27	23	29	23	20	23	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16157	16157	16157
5°	16219	15985	16078
10°	16123	15823	15901
15°	15921	15616	15600
20°	15639	15309	15292
25°	15358	14931	14931
30°	14997	14585	14458
35°	14661	14168	13957
40°	14235	13748	13487
45°	13819	13337	13006
50°	13366	12906	12446
55°	12892	12405	11944
60°	12368	11806	11370
65°	11801	11213	10697
70°	11084	10494	9994
75°	10081	9669	9426
80°	8945	8675	8229
85°	7317	6947	6224



TEST NUMBER: P331541-830

CATALOG NUMBER: S122DIW-S675D970U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.1	1.5
10°-20°	264.8	4.3
20°-30°	389.2	6.3
30°-40°	452.1	7.3
40°-50°	451.6	7.3
50°-60°	393.8	6.4
60°-70°	291.2	4.7
70°-80°	164.9	2.7
80°-90°	47.4	0.8
90°-100°	41.5	0.7
100°-110°	152.3	2.5
110°-120°	407.0	6.6
120°-130°	671.8	10.8
130°-140°	714.5	11.5
140°-150°	664.1	10.7
150°-160°	533.9	8.6
160°-170°	344.1	5.6
170°-180°	118.4	1.9
0°-30°	748.0	12.1
0°-40°	1200.1	19.4
0°-60°	2045.4	33.0
0°-90°	2548.9	41.1
90°-120°	600.8	9.7
90°-150°	2651.1	42.8
90°-180°	3648.0	58.9
0°-180°	6196.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1001	1001	1001	1001	1001	
5°	1001	996	986	993	992	95
15°	952	946	934	938	933	268
25°	862	854	838	840	838	396
35°	744	734	719	713	708	464
45°	605	598	584	574	570	467
55°	458	452	441	430	424	409
65°	309	303	294	285	280	305
75°	162	160	155	150	151	173
85°	40	38	38	35	34	45
90°	1	11	18	22	24	5
95°	58	31	35	39	39	72
105°	274	286	55	64	68	293
115°	518	534	556	158	74	510
125°	732	744	761	767	770	653
135°	906	920	929	937	936	700
145°	1051	1051	1066	1071	1067	657
155°	1157	1150	1160	1165	1158	533
165°	1220	1215	1217	1222	1217	344
175°	1247	1242	1243	1248	1240	119
180°	1245	1245	1245	1245	1245	



TEST NUMBER: P331541-830

CATALOG NUMBER: S122DIW-S675D970U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7
2.5°	1005.3	1004.5	1003.6	1002.8	1001.9	1000.5	998.6	996.7	994.9	993.0	994.7
5°	1000.7	999.8	999.0	998.2	997.3	995.7	993.3	991.0	988.6	986.3	988.0
7.5°	991.8	990.5	989.2	987.9	986.6	984.7	982.3	979.9	977.5	975.1	976.8
10°	983.4	981.8	980.3	978.8	977.4	975.3	972.8	970.3	967.6	965.1	966.8
12.5°	971.9	970.5	969.1	967.8	966.5	964.6	962.0	959.4	956.9	954.3	955.5
15°	952.5	951.3	950.0	948.8	947.4	945.4	942.6	939.8	937.1	934.2	935.2
17.5°	927.9	926.6	925.4	924.1	922.8	920.8	917.9	915.1	912.3	909.5	910.5
20°	910.2	909.0	907.7	906.3	905.1	903.0	899.9	897.0	894.0	891.0	891.6
22.5°	892.5	890.7	888.9	887.1	885.3	883.1	880.2	877.4	874.6	871.8	871.9
25°	862.1	860.4	858.8	857.0	855.3	852.6	848.9	845.4	841.7	838.1	838.5
27.5°	827.5	826.0	824.4	822.8	821.3	819.2	816.2	813.4	810.5	807.7	807.0
30°	804.4	802.7	801.0	799.3	797.6	795.1	791.9	788.7	785.5	782.3	781.7
32.5°	779.8	778.4	777.0	775.6	774.3	771.9	768.5	765.2	761.8	758.4	757.2
35°	743.8	741.7	739.5	737.4	735.2	732.4	729.1	725.6	722.2	718.8	717.5
37.5°	703.1	701.3	699.4	697.5	695.7	693.0	689.6	686.2	682.8	679.3	677.7
40°	675.4	673.7	672.0	670.3	668.6	666.1	662.6	659.2	655.8	652.3	650.4
42.5°	648.6	646.8	645.1	643.4	641.7	639.1	635.7	632.3	628.9	625.5	623.3
45°	605.2	603.7	602.2	600.8	599.3	596.9	593.7	590.5	587.3	584.1	581.7
47.5°	562.1	560.7	559.3	557.9	556.5	554.1	550.7	547.4	544.1	540.7	538.3
50°	532.1	531.0	530.0	528.9	527.8	525.8	522.8	519.8	516.8	513.8	510.9
52.5°	502.8	501.4	500.0	498.6	497.2	495.1	492.3	489.5	486.6	483.8	481.4
55°	458.0	456.8	455.4	454.1	452.9	450.9	448.4	445.8	443.3	440.7	438.1
57.5°	412.9	412.0	410.9	409.9	408.9	407.0	404.2	401.3	398.5	395.7	393.1
60°	383.0	382.1	381.3	380.4	379.6	377.6	374.7	371.6	368.6	365.6	363.3
62.5°	353.7	352.3	351.0	349.6	348.3	346.4	344.1	341.8	339.5	337.1	335.0
65°	308.9	307.6	306.3	305.0	303.7	302.0	299.9	297.7	295.6	293.5	291.5
67.5°	263.3	262.2	261.2	260.1	259.1	257.7	255.7	253.8	251.9	250.0	248.5
70°	234.8	233.9	233.1	232.2	231.4	230.0	228.0	226.1	224.2	222.3	220.7
72.5°	205.6	204.6	203.8	202.9	202.1	201.0	199.8	198.6	197.4	196.0	194.6
75°	161.6	161.2	160.8	160.3	159.9	159.2	158.2	157.0	156.0	155.0	153.6
77.5°	122.4	121.7	120.9	120.2	119.5	118.9	118.5	118.0	117.6	117.2	116.6
80°	96.2	96.0	95.8	95.6	95.4	95.0	94.6	94.2	93.8	93.3	92.7
82.5°	71.6	71.5	71.5	71.4	71.4	71.3	71.0	70.8	70.5	70.2	69.5
85°	39.5	39.2	39.0	38.8	38.5	38.4	38.2	38.0	37.7	37.5	36.9
87.5°	14.0	14.1	14.2	14.3	14.4	14.4	14.4	14.4	14.4	14.4	14.0
90°	0.9	3.1	5.3	7.5	9.7	11.6	13.2	14.8	16.4	18.0	19.0
92.5°	18.2	18.0	17.8	17.6	17.4	17.7	18.5	19.3	20.1	20.9	21.4
95°	58.5	51.9	45.3	38.7	32.1	29.5	30.9	32.3	33.7	35.2	36.1
97.5°	116.2	97.6	79.0	60.3	41.8	34.0	37.3	40.5	43.7	47.0	47.8
100°	159.4	132.0	104.5	77.2	49.8	37.7	41.1	44.5	48.0	51.4	53.0
102.5°	207.0	201.1	195.4	189.5	183.7	166.6	138.2	109.7	81.2	52.8	54.9
105°	273.8	279.8	285.8	291.8	297.8	273.5	218.9	164.2	109.6	55.0	57.1
107.5°	350.0	354.9	359.7	364.5	369.4	339.0	273.5	207.9	142.4	76.9	74.6
110°	399.0	403.2	407.4	411.6	415.8	389.0	331.1	273.3	215.5	157.6	137.6



TEST NUMBER: P331541-830

CATALOG NUMBER: S122DIW-S675D970U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	445.1	448.8	452.5	456.3	460.0	454.7	440.5	426.1	411.8	397.6	324.5
115°	517.8	521.2	524.7	528.1	531.5	535.6	540.6	545.6	550.7	555.7	463.0
117.5°	582.9	586.7	590.5	594.3	598.1	601.7	605.2	608.6	612.1	615.5	593.0
120°	630.5	633.5	636.4	639.4	642.4	645.7	649.3	653.0	656.6	660.2	662.6
122.5°	670.8	673.9	677.1	680.2	683.4	687.0	690.9	694.8	698.7	702.7	704.1
125°	732.2	734.8	737.4	740.0	742.6	745.8	749.6	753.5	757.2	761.0	762.4
127.5°	787.9	790.8	793.6	796.5	799.4	802.3	805.1	807.9	810.8	813.6	815.7
130°	823.2	826.4	829.6	832.7	835.9	838.7	840.8	843.1	845.3	847.5	849.7
132.5°	859.2	862.0	864.7	867.3	870.1	872.5	874.8	876.9	879.1	881.4	883.3
135°	906.1	909.3	912.5	915.7	918.9	921.3	923.1	924.9	926.7	928.6	930.6
137.5°	953.4	955.6	957.9	960.2	962.3	964.5	966.6	968.6	970.6	972.7	974.7
140°	984.4	986.0	987.6	989.2	990.8	992.7	994.9	997.1	999.3	1001.5	1003.3
142.5°	1010.3	1011.7	1013.2	1014.6	1016.1	1018.0	1020.6	1023.1	1025.7	1028.1	1029.8
145°	1051.0	1050.8	1050.7	1050.5	1050.3	1051.9	1055.3	1058.7	1062.1	1065.5	1066.9
147.5°	1086.6	1085.7	1085.0	1084.2	1083.5	1084.8	1088.2	1091.5	1094.9	1098.3	1099.3
150°	1109.6	1108.1	1106.7	1105.4	1104.0	1104.8	1108.1	1111.3	1114.5	1117.7	1118.9
152.5°	1129.1	1127.5	1125.9	1124.4	1122.8	1123.5	1126.5	1129.6	1132.7	1135.7	1136.9
155°	1157.3	1155.5	1153.7	1151.9	1150.1	1150.4	1152.8	1155.2	1157.6	1160.0	1161.2
157.5°	1179.5	1178.0	1176.4	1174.9	1173.4	1173.5	1175.2	1176.9	1178.5	1180.2	1181.6
160°	1192.4	1191.3	1190.1	1188.8	1187.6	1187.6	1188.8	1190.1	1191.3	1192.4	1193.6
162.5°	1204.0	1202.8	1201.6	1200.3	1199.2	1199.1	1200.1	1201.2	1202.2	1203.2	1204.6
165°	1219.5	1218.2	1217.0	1215.9	1214.7	1214.4	1214.9	1215.5	1216.2	1216.7	1218.1
167.5°	1231.0	1229.7	1228.6	1227.4	1226.2	1225.9	1226.4	1227.0	1227.6	1228.1	1229.5
170°	1237.5	1236.2	1235.1	1233.9	1232.7	1232.3	1232.7	1233.0	1233.5	1233.9	1235.3
172.5°	1241.8	1240.6	1239.3	1238.2	1237.0	1236.6	1237.0	1237.4	1237.7	1238.2	1239.6
175°	1247.4	1245.9	1244.5	1243.2	1241.8	1241.2	1241.7	1242.1	1242.5	1242.8	1244.3
177.5°	1248.3	1247.2	1246.0	1244.9	1243.8	1243.3	1243.5	1243.6	1243.8	1244.0	1245.1
180°	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6



TEST NUMBER: P331541-830

CATALOG NUMBER: S122DIW-S675D970U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7
2.5°	996.4	998.2	999.8	1000.5	1000.1	999.8	999.5	999.2
5°	989.7	991.4	993.1	993.7	993.3	992.9	992.5	992.0
7.5°	978.5	980.2	981.9	982.5	982.0	981.7	981.2	980.7
10°	968.5	970.3	971.9	972.4	971.9	971.2	970.5	969.9
12.5°	956.7	957.9	959.1	959.4	958.9	958.6	958.1	957.6
15°	936.0	936.9	937.7	937.6	936.5	935.5	934.4	933.3
17.5°	911.4	912.4	913.4	913.4	912.4	911.3	910.3	909.3
20°	892.3	893.0	893.5	893.4	892.6	891.7	890.9	890.0
22.5°	872.0	872.1	872.2	872.0	871.6	871.0	870.5	870.1
25°	839.0	839.3	839.8	839.8	839.3	839.0	838.5	838.1
27.5°	806.3	805.8	805.1	804.3	803.2	802.2	801.2	800.1
30°	781.0	780.3	779.7	778.9	778.1	777.2	776.4	775.5
32.5°	756.1	755.0	753.8	752.8	752.0	751.1	750.2	749.3
35°	716.2	714.9	713.6	712.5	711.4	710.3	709.3	708.1
37.5°	676.2	674.6	673.0	671.7	670.6	669.6	668.6	667.6
40°	648.6	646.6	644.7	643.3	642.4	641.6	640.7	639.9
42.5°	621.2	619.2	617.1	615.4	614.2	613.0	611.8	610.6
45°	579.4	577.0	574.7	573.1	572.2	571.4	570.5	569.6
47.5°	535.8	533.3	530.8	529.0	527.7	526.5	525.3	524.1
50°	507.8	504.8	501.8	499.8	498.7	497.7	496.6	495.5
52.5°	478.8	476.4	473.9	471.9	470.5	469.1	467.7	466.3
55°	435.5	433.0	430.5	428.6	427.5	426.5	425.4	424.3
57.5°	390.6	388.0	385.6	383.9	383.0	382.3	381.4	380.6
60°	360.9	358.5	356.2	354.8	354.1	353.5	352.8	352.1
62.5°	332.8	330.6	328.5	327.0	326.1	325.3	324.5	323.7
65°	289.6	287.7	285.8	284.3	283.2	282.1	281.1	280.0
67.5°	246.9	245.5	244.0	242.8	242.0	241.1	240.3	239.4
70°	219.2	217.8	216.3	215.1	214.2	213.4	212.5	211.7
72.5°	193.1	191.6	190.1	189.0	188.3	187.7	187.0	186.2
75°	152.3	151.1	149.8	149.4	149.8	150.2	150.6	151.1
77.5°	115.9	115.3	114.6	114.0	113.4	112.8	112.3	111.6
80°	92.1	91.4	90.8	90.2	89.8	89.4	89.0	88.5
82.5°	68.6	67.8	67.0	66.5	66.4	66.4	66.3	66.2
85°	36.3	35.6	35.0	34.5	34.3	34.1	33.9	33.6
87.5°	13.8	13.5	13.1	12.9	12.8	12.7	12.6	12.5
90°	20.0	21.0	22.1	22.7	23.1	23.5	23.9	24.3
92.5°	22.0	22.4	23.0	23.4	23.6	23.8	24.0	24.3
95°	37.1	38.2	39.1	39.5	39.3	39.1	38.9	38.7
97.5°	48.6	49.4	50.2	50.7	51.0	51.2	51.5	51.7
100°	54.6	56.2	57.8	58.7	59.1	59.6	59.9	60.3
102.5°	56.9	59.0	61.1	62.4	63.0	63.5	64.1	64.7
105°	59.4	61.5	63.7	65.2	66.1	66.8	67.7	68.4
107.5°	72.4	70.2	68.0	67.2	68.1	68.8	69.7	70.4
110°	117.5	97.6	77.6	68.0	68.7	69.6	70.3	71.2



TEST NUMBER: P331541-830

CATALOG NUMBER: S122DIW-S675D970U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	251.5	178.5	105.5	69.3	69.9	70.6	71.3	71.9
115°	370.3	277.7	185.0	131.5	117.1	102.6	88.2	73.9
117.5°	570.6	548.3	525.8	491.0	443.6	396.2	348.9	301.5
120°	665.0	667.3	669.8	657.4	630.5	603.4	576.4	549.4
122.5°	705.6	707.0	708.4	706.5	701.3	696.1	690.8	685.6
125°	763.8	765.3	766.7	767.6	768.3	768.8	769.4	770.1
127.5°	817.7	819.7	821.8	822.8	823.0	823.1	823.2	823.3
130°	851.9	854.1	856.3	857.3	857.1	856.9	856.7	856.5
132.5°	885.1	887.0	888.9	889.8	889.5	889.3	889.1	888.9
135°	932.6	934.5	936.5	937.4	937.0	936.5	936.1	935.8
137.5°	976.6	978.5	980.5	981.2	980.5	979.8	979.1	978.5
140°	1005.1	1006.9	1008.7	1009.1	1008.1	1007.1	1006.1	1005.1
142.5°	1031.4	1033.1	1034.7	1035.0	1034.1	1033.0	1032.1	1031.0
145°	1068.3	1069.7	1071.0	1071.3	1070.3	1069.2	1068.3	1067.2
147.5°	1100.3	1101.4	1102.4	1102.5	1101.6	1100.8	1099.9	1099.1
150°	1120.1	1121.2	1122.5	1122.6	1121.6	1120.6	1119.6	1118.6
152.5°	1138.1	1139.3	1140.5	1140.5	1139.2	1137.8	1136.5	1135.2
155°	1162.4	1163.6	1164.8	1164.6	1163.0	1161.4	1159.8	1158.2
157.5°	1182.9	1184.3	1185.6	1185.5	1183.9	1182.4	1180.8	1179.3
160°	1194.9	1196.0	1197.2	1197.1	1195.7	1194.3	1193.0	1191.6
162.5°	1206.0	1207.3	1208.7	1208.5	1206.7	1205.0	1203.3	1201.6
165°	1219.6	1221.0	1222.4	1222.4	1221.0	1219.6	1218.1	1216.7
167.5°	1230.9	1232.3	1233.7	1233.5	1231.7	1229.9	1228.1	1226.3
170°	1236.7	1238.0	1239.4	1239.3	1237.5	1235.7	1233.9	1232.1
172.5°	1241.0	1242.4	1243.8	1243.6	1241.8	1240.0	1238.2	1236.4
175°	1245.7	1247.1	1248.5	1248.2	1246.1	1244.2	1242.2	1240.2
177.5°	1246.2	1247.3	1248.4	1248.3	1246.8	1245.4	1244.0	1242.6
180°	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6

(END OF REPORT)