

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331808-830

Luminaire Tested: **S122RDIW-S675D435U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331808-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S675D435U830-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 435 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3603.7 lumens
Efficiency: N/A
Efficacy: 95.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 37.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331808-830

CATALOG NUMBER: S122RDIW-S675D435U830-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

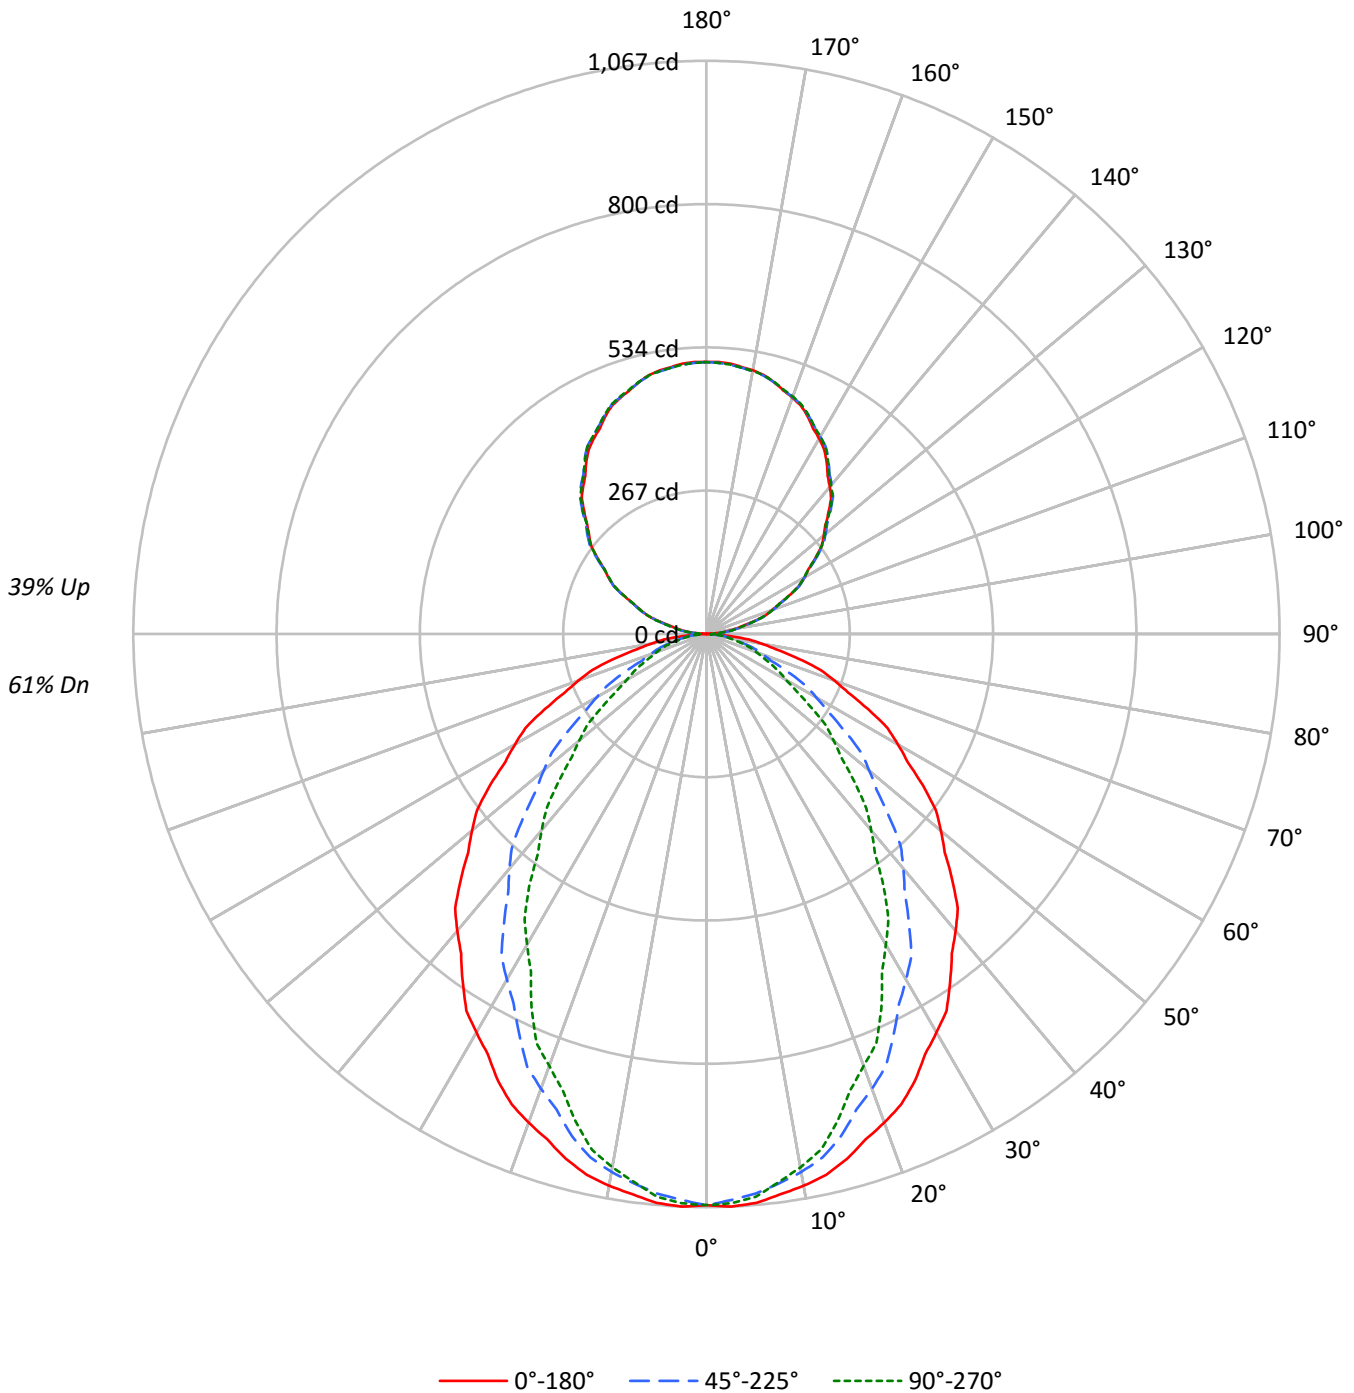



TEST NUMBER: P331808-830

CATALOG NUMBER: S122RDIW-S675D435U830-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	66	66	66	61	
1	101	97	93	89	94	91	87	84	79	77	75	69	67	65	59	58	57	57	57	57	52	
2	92	85	79	74	86	80	75	70	70	66	63	61	58	56	53	51	49	49	49	49	45	
3	85	75	68	62	79	71	64	59	62	57	53	55	51	48	47	45	42	42	42	42	39	
4	78	67	59	53	72	63	56	51	56	50	46	49	45	41	43	40	37	37	37	37	34	
5	72	60	52	46	67	57	50	44	50	45	40	44	40	36	39	35	33	33	33	33	30	
6	66	54	46	41	62	51	44	39	46	40	35	40	36	32	35	32	29	29	29	29	26	
7	61	49	41	36	57	47	39	34	42	36	32	37	32	29	33	29	26	26	26	26	24	
8	57	45	37	32	53	43	36	31	38	32	28	34	29	26	30	26	23	23	23	23	21	
9	53	41	34	29	50	39	32	28	35	29	26	31	27	23	28	24	21	21	21	21	19	
10	50	38	31	26	47	36	29	25	32	27	23	29	25	21	26	22	20	20	20	20	18	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17166	17166	17166
5°	17232	16951	17045
10°	17100	16674	16531
15°	16904	16181	15714
20°	16632	15474	14698
25°	16352	14672	13714
30°	15966	13848	12450
35°	15589	12952	11341
40°	15209	12026	10058
45°	14764	10985	8896
50°	14307	9934	7759
55°	13841	8802	6663
60°	13298	7611	5532
65°	12684	6395	5039
70°	11948	5268	4631
75°	11042	4803	4323
80°	9754	4296	3933
85°	7669	3390	3390



TEST NUMBER: P331808-830

CATALOG NUMBER: S122RDIW-S675D435U830-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.5	2.8
10°-20°	273.3	7.6
20°-30°	383.7	10.6
30°-40°	418.4	11.6
40°-50°	384.7	10.7
50°-60°	302.2	8.4
60°-70°	197.0	5.5
70°-80°	101.6	2.8
80°-90°	28.4	0.8
90°-100°	32.1	0.9
100°-110°	99.6	2.8
110°-120°	170.2	4.7
120°-130°	223.9	6.2
130°-140°	251.3	7.0
140°-150°	246.4	6.8
150°-160°	206.6	5.7
160°-170°	137.1	3.8
170°-180°	47.9	1.3
0°-30°	756.5	21.0
0°-40°	1174.9	32.6
0°-60°	1861.8	51.7
0°-90°	2188.8	60.7
90°-120°	301.9	8.4
90°-150°	1023.3	28.4
90°-180°	1415.0	39.3
0°-180°	3603.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1063	1063	1063	1063	1063	
5°	1063	1058	1046	1054	1052	101
15°	1011	999	968	950	940	285
25°	918	885	824	786	770	422
35°	791	740	657	599	575	495
45°	647	580	481	415	390	499
55°	492	415	313	257	237	439
65°	332	254	167	136	132	329
75°	177	112	77	71	69	187
85°	41	22	18	18	18	49
90°	0	6	15	14	14	3
95°	22	26	27	27	26	25
105°	92	93	94	95	95	97
115°	171	173	172	172	171	169
125°	248	252	251	250	249	222
135°	322	326	327	327	325	248
145°	390	393	396	396	394	244
155°	446	448	449	451	450	205
165°	486	485	485	488	486	137
175°	505	504	503	506	504	48
180°	506	506	506	506	506	



TEST NUMBER: P331808-830

CATALOG NUMBER: S122RDIW-S675D435U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2
2.5°	1067.1	1066.2	1065.4	1064.5	1063.7	1062.2	1060.4	1058.5	1056.7	1054.8	1056.5
5°	1063.2	1062.2	1061.1	1060.0	1058.9	1057.1	1054.2	1051.5	1048.7	1045.9	1047.8
7.5°	1052.3	1050.9	1049.6	1048.3	1047.0	1044.6	1041.4	1038.2	1034.9	1031.7	1032.2
10°	1043.0	1041.5	1040.0	1038.5	1037.0	1034.2	1029.8	1025.6	1021.3	1017.0	1016.4
12.5°	1031.4	1029.6	1027.7	1026.0	1024.1	1020.5	1015.0	1009.6	1004.0	998.5	997.4
15°	1011.3	1008.9	1006.5	1004.2	1001.8	997.0	989.8	982.5	975.2	968.0	963.9
17.5°	986.5	982.9	979.3	975.6	972.0	965.6	956.3	947.0	937.6	928.3	923.5
20°	968.0	963.7	959.4	955.2	950.8	943.4	932.6	922.0	911.3	900.6	895.2
22.5°	947.9	943.2	938.4	933.6	928.8	920.4	908.3	896.3	884.2	872.1	865.3
25°	917.9	911.1	904.3	897.4	890.6	880.1	866.0	851.9	837.7	823.6	814.8
27.5°	881.7	874.3	866.9	859.4	852.0	840.3	824.4	808.5	792.6	776.7	766.5
30°	856.4	848.2	840.1	832.0	823.9	811.2	794.1	777.0	759.9	742.8	731.9
32.5°	831.7	822.2	812.8	803.2	793.7	780.2	762.8	745.4	727.9	710.5	698.0
35°	790.9	780.0	769.1	758.2	747.3	732.4	713.6	694.8	676.0	657.1	643.7
37.5°	750.2	738.1	726.1	714.2	702.2	686.2	666.2	646.1	626.0	606.0	591.2
40°	721.6	708.8	696.0	683.2	670.3	653.6	632.8	612.1	591.4	570.6	555.4
42.5°	692.4	678.9	665.3	651.9	638.4	620.9	599.5	578.1	556.6	535.2	519.4
45°	646.6	632.3	617.9	603.6	589.3	570.9	548.5	526.0	503.5	481.1	465.9
47.5°	601.9	586.7	571.6	556.4	541.2	522.1	498.9	475.7	452.5	429.3	414.2
50°	569.6	554.4	539.2	524.1	508.9	489.6	466.0	442.5	419.0	395.5	380.7
52.5°	538.1	522.2	506.3	490.5	474.6	455.2	432.2	409.2	386.2	363.2	348.9
55°	491.7	475.0	458.4	441.7	425.0	405.1	382.0	358.9	335.8	312.7	299.9
57.5°	444.1	427.1	409.9	392.9	375.7	356.1	333.8	311.7	289.5	267.3	255.5
60°	411.8	394.7	377.6	360.5	343.4	323.9	301.8	279.7	257.8	235.7	224.8
62.5°	380.2	363.2	346.0	328.9	311.8	292.8	271.8	250.8	229.8	208.8	198.4
65°	332.0	314.6	297.3	280.0	262.7	244.4	225.2	205.9	186.6	167.4	160.1
67.5°	285.4	268.2	251.0	233.8	216.6	199.3	182.0	164.8	147.4	130.1	126.8
70°	253.1	236.4	219.7	203.0	186.3	170.6	155.9	141.1	126.4	111.6	109.4
72.5°	222.3	206.2	190.3	174.3	158.3	144.4	132.5	120.6	108.9	97.0	95.2
75°	177.0	162.1	147.1	132.1	117.2	106.0	98.8	91.5	84.3	77.0	75.5
77.5°	132.6	119.4	106.3	93.2	80.1	71.7	68.2	64.8	61.3	57.8	56.8
80°	104.9	94.0	83.0	72.2	61.3	54.8	52.6	50.4	48.4	46.2	45.3
82.5°	79.5	71.0	62.5	53.9	45.4	40.4	39.0	37.5	36.1	34.7	34.1
85°	41.4	36.9	32.4	27.9	23.4	20.8	20.2	19.6	18.9	18.3	18.3
87.5°	12.4	11.2	10.1	9.0	7.8	7.4	7.9	8.3	8.8	9.1	9.0
90°	0.5	1.6	2.7	3.9	5.0	6.6	8.7	10.7	12.8	15.0	14.8
92.5°	7.6	8.5	9.2	10.1	10.9	11.6	12.1	12.6	13.1	13.6	13.6
95°	22.2	23.2	24.1	25.1	26.0	26.6	26.8	27.0	27.1	27.3	27.3
97.5°	40.5	41.4	42.2	43.1	43.9	44.5	44.9	45.2	45.6	45.9	45.9
100°	54.2	55.0	55.7	56.6	57.3	57.8	58.1	58.3	58.6	58.9	58.9
102.5°	68.6	69.2	69.7	70.4	71.0	71.5	71.8	72.2	72.6	73.0	73.0
105°	91.8	92.1	92.4	92.7	92.9	93.2	93.4	93.6	93.8	94.0	94.2
107.5°	115.2	115.6	116.0	116.5	116.9	117.1	117.1	117.1	117.1	117.1	117.2
110°	130.3	130.8	131.4	132.0	132.5	132.8	132.8	132.8	132.8	132.8	132.8



TEST NUMBER: P331808-830

CATALOG NUMBER: S122RDIW-S675D435U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	146.7	147.2	147.8	148.4	148.9	149.2	149.1	149.0	148.9	148.8	148.6
115°	170.8	171.4	171.9	172.5	173.1	173.2	173.1	172.9	172.7	172.5	172.4
117.5°	194.9	195.7	196.4	197.2	197.9	198.0	197.6	197.0	196.4	196.0	195.7
120°	210.9	211.7	212.4	213.2	214.0	214.0	213.2	212.4	211.7	210.9	210.9
122.5°	225.6	226.6	227.4	228.4	229.3	229.5	228.9	228.4	227.9	227.3	227.2
125°	248.5	249.4	250.2	251.1	251.9	252.2	251.9	251.7	251.4	251.1	250.8
127.5°	270.8	271.9	273.0	274.1	275.1	275.5	275.2	274.8	274.5	274.2	273.8
130°	284.8	286.1	287.3	288.5	289.7	290.3	290.1	289.9	289.7	289.5	289.4
132.5°	300.6	301.5	302.6	303.6	304.5	305.1	305.1	305.2	305.2	305.2	304.8
135°	321.6	322.6	323.7	324.7	325.7	326.3	326.5	326.7	326.9	327.1	327.0
137.5°	343.7	344.5	345.3	346.2	347.0	347.6	347.9	348.2	348.4	348.6	348.6
140°	357.0	357.9	358.7	359.6	360.4	361.1	361.6	362.0	362.5	363.0	363.0
142.5°	370.7	371.6	372.4	373.2	374.1	374.7	374.9	375.3	375.6	376.0	376.1
145°	390.3	391.0	391.6	392.3	392.9	393.6	394.2	394.7	395.3	395.9	396.0
147.5°	407.8	408.6	409.4	410.2	411.0	411.6	412.0	412.4	412.7	413.1	413.3
150°	419.8	420.4	420.9	421.5	422.1	422.5	422.9	423.3	423.7	424.0	424.3
152.5°	430.4	430.9	431.5	432.1	432.6	433.2	433.6	434.0	434.5	435.0	435.4
155°	446.2	446.5	446.8	447.1	447.4	447.7	448.0	448.3	448.6	448.8	449.3
157.5°	459.9	460.1	460.2	460.4	460.6	460.7	460.9	461.1	461.3	461.5	462.1
160°	468.1	468.3	468.4	468.6	468.8	468.9	469.0	469.1	469.2	469.3	469.9
162.5°	475.5	475.6	475.6	475.6	475.7	475.8	475.9	476.0	476.1	476.2	476.7
165°	485.5	485.4	485.3	485.2	485.1	485.1	485.1	485.1	485.1	485.1	485.8
167.5°	493.9	493.6	493.3	493.0	492.8	492.6	492.6	492.6	492.6	492.6	493.2
170°	498.3	498.0	497.8	497.5	497.2	497.0	496.9	496.8	496.7	496.6	497.3
172.5°	501.4	501.1	500.9	500.6	500.3	500.1	500.0	499.9	499.8	499.7	500.4
175°	505.2	504.9	504.6	504.4	504.1	503.8	503.6	503.4	503.2	503.0	503.7
177.5°	506.7	506.5	506.2	506.1	505.8	505.6	505.5	505.3	505.1	505.0	505.5
180°	506.1	506.1	506.1	506.1	506.1	506.1	506.1	506.1	506.1	506.1	506.1



TEST NUMBER: P331808-830

CATALOG NUMBER: S122RDIW-S675D435U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2
2.5°	1058.2	1059.9	1061.6	1062.2	1062.0	1061.6	1061.3	1060.9
5°	1049.7	1051.7	1053.6	1054.2	1053.6	1052.9	1052.3	1051.7
7.5°	1032.7	1033.3	1033.9	1033.6	1032.5	1031.4	1030.3	1029.2
10°	1015.8	1015.1	1014.5	1013.5	1012.2	1011.0	1009.7	1008.3
12.5°	996.3	995.1	993.9	992.3	990.1	988.1	985.9	983.7
15°	959.9	955.7	951.7	948.6	946.5	944.3	942.2	940.1
17.5°	918.7	913.8	909.0	904.7	901.1	897.4	893.7	890.0
20°	889.9	884.6	879.2	874.2	869.5	864.8	860.1	855.4
22.5°	858.4	851.5	844.6	839.4	835.8	832.4	828.9	825.4
25°	806.1	797.3	788.5	782.6	779.4	776.2	773.0	769.8
27.5°	756.2	746.0	735.8	728.1	723.0	717.9	712.8	707.8
30°	721.0	710.1	699.2	690.9	685.0	679.3	673.5	667.8
32.5°	685.6	673.2	660.7	651.8	646.3	640.9	635.5	630.1
35°	630.3	616.8	603.3	594.2	589.5	584.8	580.1	575.4
37.5°	576.3	561.5	546.7	536.5	531.1	525.8	520.4	515.0
40°	540.2	525.0	509.8	499.5	493.9	488.3	482.8	477.2
42.5°	503.8	488.0	472.4	461.8	456.5	451.1	445.7	440.3
45°	450.7	435.5	420.4	410.2	405.1	399.9	394.8	389.6
47.5°	399.2	384.1	368.9	359.1	354.4	349.8	345.1	340.4
50°	366.0	351.2	336.5	326.8	322.3	317.8	313.4	308.9
52.5°	334.7	320.4	306.1	297.0	292.8	288.7	284.6	280.4
55°	287.1	274.2	261.4	253.0	248.9	244.8	240.7	236.7
57.5°	243.7	232.1	220.3	212.6	209.2	205.9	202.4	199.0
60°	214.0	203.0	192.1	184.9	181.5	178.1	174.7	171.3
62.5°	188.0	177.6	167.2	161.0	158.9	156.9	154.9	152.8
65°	152.9	145.6	138.4	134.4	133.7	133.1	132.4	131.9
67.5°	123.4	120.1	116.8	114.7	114.0	113.4	112.7	112.0
70°	107.4	105.2	103.0	101.6	100.7	99.8	99.0	98.1
72.5°	93.4	91.6	89.8	88.7	88.1	87.7	87.1	86.6
75°	74.0	72.5	71.0	70.1	69.9	69.7	69.5	69.3
77.5°	56.0	55.1	54.3	53.7	53.3	53.1	52.7	52.3
80°	44.5	43.6	42.8	42.3	42.3	42.3	42.3	42.3
82.5°	33.6	33.1	32.6	32.3	32.3	32.3	32.3	32.3
85°	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3
87.5°	8.8	8.5	8.3	8.2	8.2	8.3	8.3	8.3
90°	14.6	14.4	14.2	14.1	14.2	14.3	14.4	14.5
92.5°	13.7	13.7	13.8	13.8	13.8	13.8	13.9	13.9
95°	27.3	27.3	27.3	27.2	27.1	26.9	26.7	26.5
97.5°	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9
100°	58.9	58.9	58.9	58.9	58.8	58.7	58.6	58.5
102.5°	73.0	73.1	73.2	73.2	73.1	73.0	73.0	72.9
105°	94.3	94.5	94.7	94.8	94.8	94.8	94.8	94.8
107.5°	117.3	117.3	117.4	117.3	116.8	116.3	115.9	115.5
110°	132.8	132.8	132.8	132.6	132.3	132.1	131.8	131.5



TEST NUMBER: P331808-830

CATALOG NUMBER: S122RDIW-S675D435U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	148.5	148.2	148.0	147.7	147.5	147.3	147.1	146.9
115°	172.3	172.2	172.1	171.9	171.6	171.4	171.1	170.8
117.5°	195.5	195.2	195.0	194.7	194.4	194.2	193.9	193.6
120°	210.9	210.9	210.9	210.8	210.6	210.3	210.0	209.7
122.5°	226.9	226.7	226.4	226.2	226.0	225.8	225.6	225.4
125°	250.5	250.2	250.0	249.8	249.7	249.6	249.5	249.4
127.5°	273.4	273.1	272.8	272.5	272.1	271.8	271.5	271.3
130°	289.2	289.0	288.8	288.5	288.1	287.8	287.4	287.0
132.5°	304.4	304.0	303.6	303.2	302.9	302.6	302.3	302.0
135°	326.9	326.8	326.7	326.5	326.2	325.9	325.6	325.4
137.5°	348.5	348.4	348.4	348.1	347.7	347.3	346.9	346.6
140°	363.0	363.0	363.0	362.8	362.4	362.0	361.7	361.3
142.5°	376.1	376.2	376.3	376.1	375.7	375.3	374.9	374.6
145°	396.1	396.2	396.2	396.1	395.7	395.3	394.9	394.5
147.5°	413.5	413.8	414.0	413.9	413.5	413.1	412.7	412.5
150°	424.6	424.9	425.2	425.2	424.9	424.6	424.3	424.0
152.5°	435.6	436.0	436.4	436.4	436.0	435.6	435.4	435.0
155°	449.8	450.3	450.7	450.8	450.5	450.3	450.0	449.7
157.5°	462.7	463.4	464.0	464.1	463.6	463.2	462.8	462.3
160°	470.4	471.0	471.6	471.6	471.3	470.9	470.5	470.1
162.5°	477.4	478.1	478.7	478.8	478.3	477.9	477.4	477.0
165°	486.4	487.1	487.8	487.9	487.4	486.9	486.4	486.0
167.5°	493.9	494.6	495.2	495.3	494.7	494.3	493.8	493.3
170°	497.9	498.6	499.3	499.4	498.8	498.2	497.7	497.1
172.5°	501.1	501.7	502.4	502.4	501.8	501.2	500.7	500.1
175°	504.4	505.0	505.7	505.8	505.2	504.6	504.1	503.5
177.5°	506.0	506.3	506.8	506.8	506.3	506.0	505.5	505.0
180°	506.1	506.1	506.1	506.1	506.1	506.1	506.1	506.1

(END OF REPORT)