

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331815-830

Luminaire Tested: **S122RDIW-S675D970U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331815-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S675D970U830-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 970 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5837.4 lumens  
Efficiency: N/A  
Efficacy: 111.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 52.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331815-830

CATALOG NUMBER: S122RDIW-S675D970U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

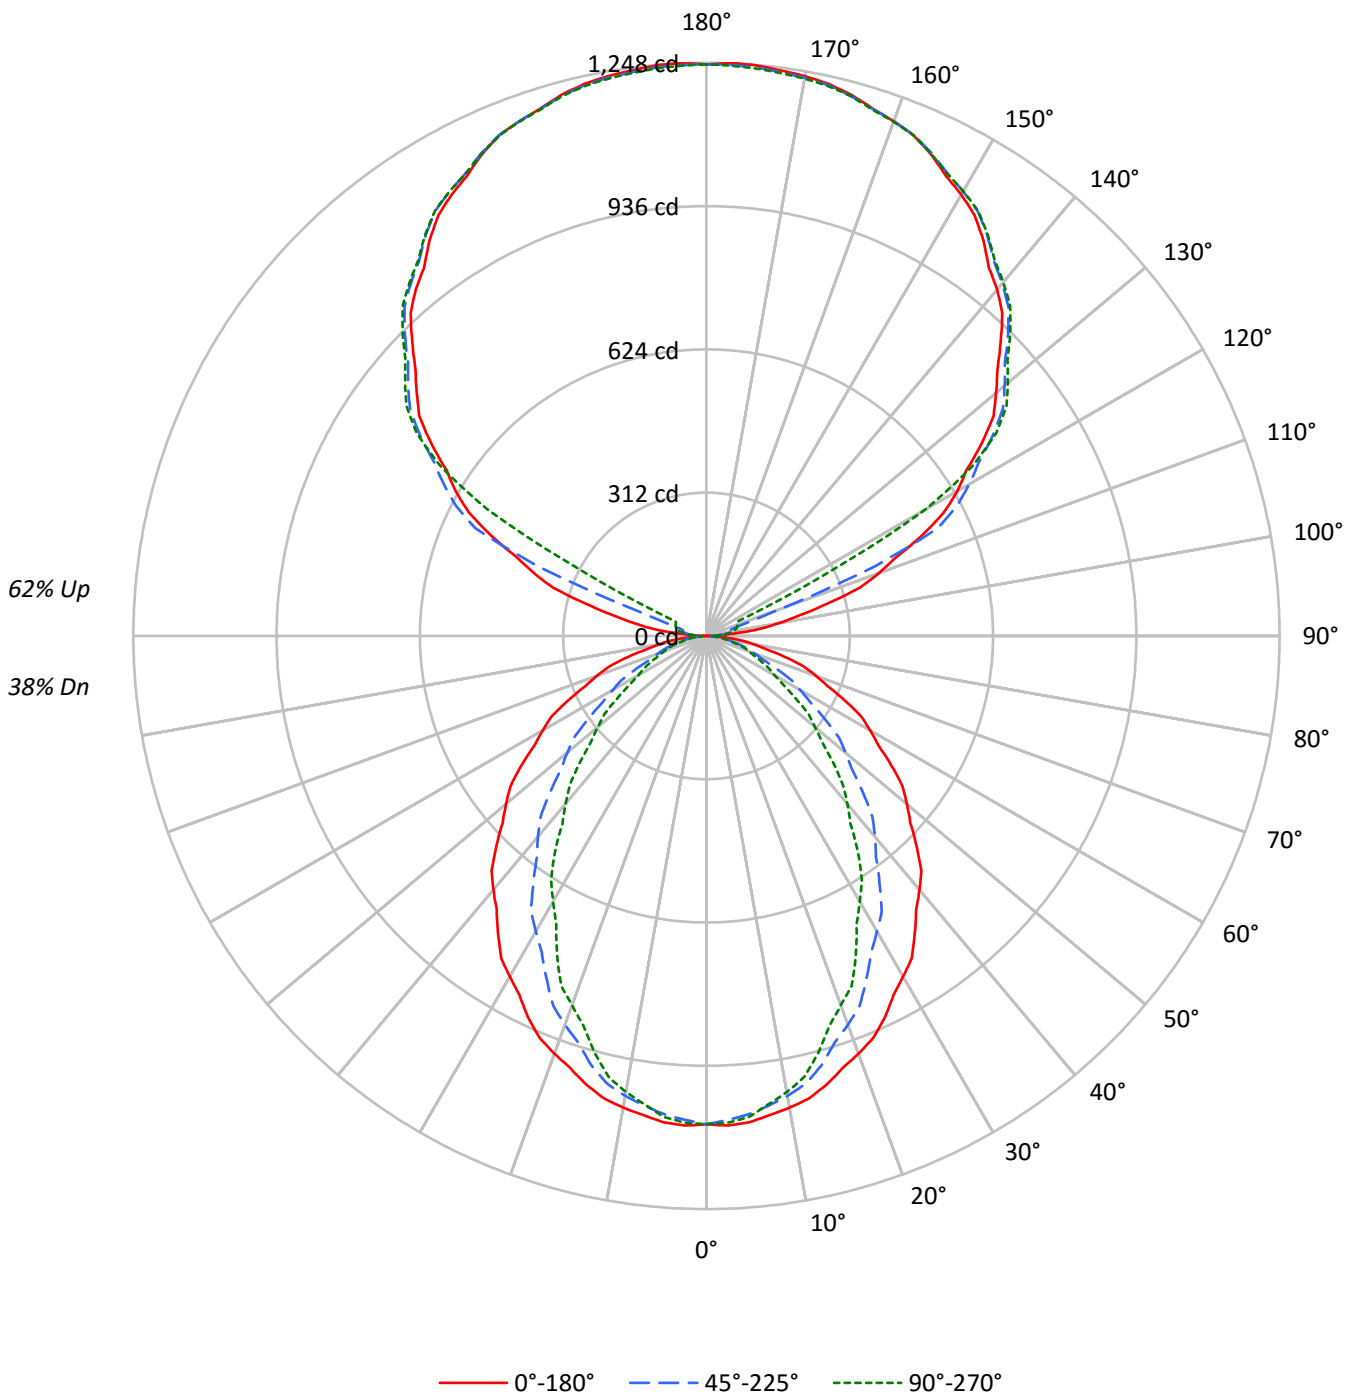



TEST NUMBER: P331815-830

CATALOG NUMBER: S122RDIW-S675D970U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45	38				
1	95	91	88	84	86	83	80	77	67	65	63	53	52	50	40	39	38	32				
2	87	80	74	69	79	73	68	64	59	56	53	47	45	43	36	34	33	28				
3	80	71	64	58	72	64	58	54	53	48	45	42	39	36	32	30	28	24				
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25	21				
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22	18				
6	62	50	42	37	56	46	39	34	38	33	29	31	27	24	24	21	19	16				
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17	15				
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	17	16	13				
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14	12				
10	46	35	28	23	42	32	26	21	27	22	19	22	18	16	17	15	13	11				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	17166	17166	17166
5°	17232	16951	17045
10°	17100	16674	16531
15°	16904	16181	15714
20°	16632	15474	14698
25°	16352	14672	13714
30°	15966	13848	12450
35°	15589	12952	11341
40°	15209	12026	10058
45°	14764	10985	8896
50°	14307	9934	7759
55°	13841	8802	6663
60°	13298	7611	5532
65°	12684	6395	5039
70°	11948	5268	4631
75°	11042	4803	4323
80°	9754	4296	3933
85°	7669	3390	3390



TEST NUMBER: P331815-830

CATALOG NUMBER: S122RDIW-S675D970U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	99.5	1.7
10°-20°	273.3	4.7
20°-30°	383.7	6.6
30°-40°	418.4	7.2
40°-50°	384.7	6.6
50°-60°	302.2	5.2
60°-70°	197.0	3.4
70°-80°	101.6	1.7
80°-90°	29.4	0.5
90°-100°	41.5	0.7
100°-110°	152.3	2.6
110°-120°	407.0	7.0
120°-130°	671.8	11.5
130°-140°	714.5	12.2
140°-150°	664.1	11.4
150°-160°	533.9	9.1
160°-170°	344.1	5.9
170°-180°	118.4	2.0
0°-30°	756.5	13.0
0°-40°	1174.9	20.1
0°-60°	1861.8	31.9
0°-90°	2189.8	37.5
90°-120°	600.8	10.3
90°-150°	2651.1	45.4
90°-180°	3648.0	62.5
0°-180°	5837.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1063	1063	1063	1063	1063	
5°	1063	1058	1046	1054	1052	101
15°	1011	999	968	950	940	285
25°	918	885	824	786	770	422
35°	791	740	657	599	575	495
45°	647	580	481	415	390	499
55°	492	415	313	257	237	439
65°	332	254	167	136	132	329
75°	177	112	77	71	69	187
85°	41	22	18	18	18	49
90°	1	11	18	22	24	4
95°	58	31	35	39	39	72
105°	274	286	55	64	68	293
115°	518	534	556	158	74	510
125°	732	744	761	767	770	653
135°	906	920	929	937	936	700
145°	1051	1051	1066	1071	1067	657
155°	1157	1150	1160	1165	1158	533
165°	1220	1215	1217	1222	1217	344
175°	1247	1242	1243	1248	1240	119
180°	1245	1245	1245	1245	1245	



TEST NUMBER: P331815-830

CATALOG NUMBER: S122RDIW-S675D970U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2
2.5°	1067.1	1066.2	1065.4	1064.5	1063.7	1062.2	1060.4	1058.5	1056.7	1054.8	1056.5
5°	1063.2	1062.2	1061.1	1060.0	1058.9	1057.1	1054.2	1051.5	1048.7	1045.9	1047.8
7.5°	1052.3	1050.9	1049.6	1048.3	1047.0	1044.6	1041.4	1038.2	1034.9	1031.7	1032.2
10°	1043.0	1041.5	1040.0	1038.5	1037.0	1034.2	1029.8	1025.6	1021.3	1017.0	1016.4
12.5°	1031.4	1029.6	1027.7	1026.0	1024.1	1020.5	1015.0	1009.6	1004.0	998.5	997.4
15°	1011.3	1008.9	1006.5	1004.2	1001.8	997.0	989.8	982.5	975.2	968.0	963.9
17.5°	986.5	982.9	979.3	975.6	972.0	965.6	956.3	947.0	937.6	928.3	923.5
20°	968.0	963.7	959.4	955.2	950.8	943.4	932.6	922.0	911.3	900.6	895.2
22.5°	947.9	943.2	938.4	933.6	928.8	920.4	908.3	896.3	884.2	872.1	865.3
25°	917.9	911.1	904.3	897.4	890.6	880.1	866.0	851.9	837.7	823.6	814.8
27.5°	881.7	874.3	866.9	859.4	852.0	840.3	824.4	808.5	792.6	776.7	766.5
30°	856.4	848.2	840.1	832.0	823.9	811.2	794.1	777.0	759.9	742.8	731.9
32.5°	831.7	822.2	812.8	803.2	793.7	780.2	762.8	745.4	727.9	710.5	698.0
35°	790.9	780.0	769.1	758.2	747.3	732.4	713.6	694.8	676.0	657.1	643.7
37.5°	750.2	738.1	726.1	714.2	702.2	686.2	666.2	646.1	626.0	606.0	591.2
40°	721.6	708.8	696.0	683.2	670.3	653.6	632.8	612.1	591.4	570.6	555.4
42.5°	692.4	678.9	665.3	651.9	638.4	620.9	599.5	578.1	556.6	535.2	519.4
45°	646.6	632.3	617.9	603.6	589.3	570.9	548.5	526.0	503.5	481.1	465.9
47.5°	601.9	586.7	571.6	556.4	541.2	522.1	498.9	475.7	452.5	429.3	414.2
50°	569.6	554.4	539.2	524.1	508.9	489.6	466.0	442.5	419.0	395.5	380.7
52.5°	538.1	522.2	506.3	490.5	474.6	455.2	432.2	409.2	386.2	363.2	348.9
55°	491.7	475.0	458.4	441.7	425.0	405.1	382.0	358.9	335.8	312.7	299.9
57.5°	444.1	427.1	409.9	392.9	375.7	356.1	333.8	311.7	289.5	267.3	255.5
60°	411.8	394.7	377.6	360.5	343.4	323.9	301.8	279.7	257.8	235.7	224.8
62.5°	380.2	363.2	346.0	328.9	311.8	292.8	271.8	250.8	229.8	208.8	198.4
65°	332.0	314.6	297.3	280.0	262.7	244.4	225.2	205.9	186.6	167.4	160.1
67.5°	285.4	268.2	251.0	233.8	216.6	199.3	182.0	164.8	147.4	130.1	126.8
70°	253.1	236.4	219.7	203.0	186.3	170.6	155.9	141.1	126.4	111.6	109.4
72.5°	222.3	206.2	190.3	174.3	158.3	144.4	132.5	120.6	108.9	97.0	95.2
75°	177.0	162.1	147.1	132.1	117.2	106.0	98.8	91.5	84.3	77.0	75.5
77.5°	132.6	119.4	106.3	93.2	80.1	71.7	68.2	64.8	61.3	57.8	56.8
80°	104.9	94.0	83.0	72.2	61.3	54.8	52.6	50.4	48.4	46.2	45.3
82.5°	79.5	71.0	62.5	53.9	45.4	40.4	39.0	37.5	36.1	34.7	34.1
85°	41.4	36.9	32.4	27.9	23.4	20.8	20.2	19.6	18.9	18.3	18.3
87.5°	12.5	11.6	10.7	9.7	8.8	8.5	8.8	9.1	9.4	9.8	9.8
90°	0.9	3.1	5.3	7.5	9.7	11.6	13.2	14.8	16.4	18.0	19.0
92.5°	18.2	18.0	17.8	17.6	17.4	17.7	18.5	19.3	20.1	20.9	21.4
95°	58.5	51.9	45.3	38.7	32.1	29.5	30.9	32.3	33.7	35.2	36.1
97.5°	116.2	97.6	79.0	60.3	41.8	34.0	37.3	40.5	43.7	47.0	47.8
100°	159.4	132.0	104.5	77.2	49.8	37.7	41.1	44.5	48.0	51.4	53.0
102.5°	207.0	201.1	195.4	189.5	183.7	166.6	138.2	109.7	81.2	52.8	54.9
105°	273.8	279.8	285.8	291.8	297.8	273.5	218.9	164.2	109.6	55.0	57.1
107.5°	350.0	354.9	359.7	364.5	369.4	339.0	273.5	207.9	142.4	76.9	74.6
110°	399.0	403.2	407.4	411.6	415.8	389.0	331.1	273.3	215.5	157.6	137.6



TEST NUMBER: P331815-830

CATALOG NUMBER: S122RDIW-S675D970U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	445.1	448.8	452.5	456.3	460.0	454.7	440.5	426.1	411.8	397.6	324.5
115°	517.8	521.2	524.7	528.1	531.5	535.6	540.6	545.6	550.7	555.7	463.0
117.5°	582.9	586.7	590.5	594.3	598.1	601.7	605.2	608.6	612.1	615.5	593.0
120°	630.5	633.5	636.4	639.4	642.4	645.7	649.3	653.0	656.6	660.2	662.6
122.5°	670.8	673.9	677.1	680.2	683.4	687.0	690.9	694.8	698.7	702.7	704.1
125°	732.2	734.8	737.4	740.0	742.6	745.8	749.6	753.5	757.2	761.0	762.4
127.5°	787.9	790.8	793.6	796.5	799.4	802.3	805.1	807.9	810.8	813.6	815.7
130°	823.2	826.4	829.6	832.7	835.9	838.7	840.8	843.1	845.3	847.5	849.7
132.5°	859.2	862.0	864.7	867.3	870.1	872.5	874.8	876.9	879.1	881.4	883.3
135°	906.1	909.3	912.5	915.7	918.9	921.3	923.1	924.9	926.7	928.6	930.6
137.5°	953.4	955.6	957.9	960.2	962.3	964.5	966.6	968.6	970.6	972.7	974.7
140°	984.4	986.0	987.6	989.2	990.8	992.7	994.9	997.1	999.3	1001.5	1003.3
142.5°	1010.3	1011.7	1013.2	1014.6	1016.1	1018.0	1020.6	1023.1	1025.7	1028.1	1029.8
145°	1051.0	1050.8	1050.7	1050.5	1050.3	1051.9	1055.3	1058.7	1062.1	1065.5	1066.9
147.5°	1086.6	1085.7	1085.0	1084.2	1083.5	1084.8	1088.2	1091.5	1094.9	1098.3	1099.3
150°	1109.6	1108.1	1106.7	1105.4	1104.0	1104.8	1108.1	1111.3	1114.5	1117.7	1118.9
152.5°	1129.1	1127.5	1125.9	1124.4	1122.8	1123.5	1126.5	1129.6	1132.7	1135.7	1136.9
155°	1157.3	1155.5	1153.7	1151.9	1150.1	1150.4	1152.8	1155.2	1157.6	1160.0	1161.2
157.5°	1179.5	1178.0	1176.4	1174.9	1173.4	1173.5	1175.2	1176.9	1178.5	1180.2	1181.6
160°	1192.4	1191.3	1190.1	1188.8	1187.6	1187.6	1188.8	1190.1	1191.3	1192.4	1193.6
162.5°	1204.0	1202.8	1201.6	1200.3	1199.2	1199.1	1200.1	1201.2	1202.2	1203.2	1204.6
165°	1219.5	1218.2	1217.0	1215.9	1214.7	1214.4	1214.9	1215.5	1216.2	1216.7	1218.1
167.5°	1231.0	1229.7	1228.6	1227.4	1226.2	1225.9	1226.4	1227.0	1227.6	1228.1	1229.5
170°	1237.5	1236.2	1235.1	1233.9	1232.7	1232.3	1232.7	1233.0	1233.5	1233.9	1235.3
172.5°	1241.8	1240.6	1239.3	1238.2	1237.0	1236.6	1237.0	1237.4	1237.7	1238.2	1239.6
175°	1247.4	1245.9	1244.5	1243.2	1241.8	1241.2	1241.7	1242.1	1242.5	1242.8	1244.3
177.5°	1248.3	1247.2	1246.0	1244.9	1243.8	1243.3	1243.5	1243.6	1243.8	1244.0	1245.1
180°	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6



TEST NUMBER: P331815-830

CATALOG NUMBER: S122RDIW-S675D970U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2
2.5°	1058.2	1059.9	1061.6	1062.2	1062.0	1061.6	1061.3	1060.9
5°	1049.7	1051.7	1053.6	1054.2	1053.6	1052.9	1052.3	1051.7
7.5°	1032.7	1033.3	1033.9	1033.6	1032.5	1031.4	1030.3	1029.2
10°	1015.8	1015.1	1014.5	1013.5	1012.2	1011.0	1009.7	1008.3
12.5°	996.3	995.1	993.9	992.3	990.1	988.1	985.9	983.7
15°	959.9	955.7	951.7	948.6	946.5	944.3	942.2	940.1
17.5°	918.7	913.8	909.0	904.7	901.1	897.4	893.7	890.0
20°	889.9	884.6	879.2	874.2	869.5	864.8	860.1	855.4
22.5°	858.4	851.5	844.6	839.4	835.8	832.4	828.9	825.4
25°	806.1	797.3	788.5	782.6	779.4	776.2	773.0	769.8
27.5°	756.2	746.0	735.8	728.1	723.0	717.9	712.8	707.8
30°	721.0	710.1	699.2	690.9	685.0	679.3	673.5	667.8
32.5°	685.6	673.2	660.7	651.8	646.3	640.9	635.5	630.1
35°	630.3	616.8	603.3	594.2	589.5	584.8	580.1	575.4
37.5°	576.3	561.5	546.7	536.5	531.1	525.8	520.4	515.0
40°	540.2	525.0	509.8	499.5	493.9	488.3	482.8	477.2
42.5°	503.8	488.0	472.4	461.8	456.5	451.1	445.7	440.3
45°	450.7	435.5	420.4	410.2	405.1	399.9	394.8	389.6
47.5°	399.2	384.1	368.9	359.1	354.4	349.8	345.1	340.4
50°	366.0	351.2	336.5	326.8	322.3	317.8	313.4	308.9
52.5°	334.7	320.4	306.1	297.0	292.8	288.7	284.6	280.4
55°	287.1	274.2	261.4	253.0	248.9	244.8	240.7	236.7
57.5°	243.7	232.1	220.3	212.6	209.2	205.9	202.4	199.0
60°	214.0	203.0	192.1	184.9	181.5	178.1	174.7	171.3
62.5°	188.0	177.6	167.2	161.0	158.9	156.9	154.9	152.8
65°	152.9	145.6	138.4	134.4	133.7	133.1	132.4	131.9
67.5°	123.4	120.1	116.8	114.7	114.0	113.4	112.7	112.0
70°	107.4	105.2	103.0	101.6	100.7	99.8	99.0	98.1
72.5°	93.4	91.6	89.8	88.7	88.1	87.7	87.1	86.6
75°	74.0	72.5	71.0	70.1	69.9	69.7	69.5	69.3
77.5°	56.0	55.1	54.3	53.7	53.3	53.1	52.7	52.3
80°	44.5	43.6	42.8	42.3	42.3	42.3	42.3	42.3
82.5°	33.6	33.1	32.6	32.3	32.3	32.3	32.3	32.3
85°	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3
87.5°	9.8	9.8	9.9	9.9	10.0	10.1	10.2	10.3
90°	20.0	21.0	22.1	22.7	23.1	23.5	23.9	24.3
92.5°	22.0	22.4	23.0	23.4	23.6	23.8	24.0	24.3
95°	37.1	38.2	39.1	39.5	39.3	39.1	38.9	38.7
97.5°	48.6	49.4	50.2	50.7	51.0	51.2	51.5	51.7
100°	54.6	56.2	57.8	58.7	59.1	59.6	59.9	60.3
102.5°	56.9	59.0	61.1	62.4	63.0	63.5	64.1	64.7
105°	59.4	61.5	63.7	65.2	66.1	66.8	67.7	68.4
107.5°	72.4	70.2	68.0	67.2	68.1	68.8	69.7	70.4
110°	117.5	97.6	77.6	68.0	68.7	69.6	70.3	71.2





TEST NUMBER: P331815-830

CATALOG NUMBER: S122RDIW-S675D970U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	251.5	178.5	105.5	69.3	69.9	70.6	71.3	71.9
115°	370.3	277.7	185.0	131.5	117.1	102.6	88.2	73.9
117.5°	570.6	548.3	525.8	491.0	443.6	396.2	348.9	301.5
120°	665.0	667.3	669.8	657.4	630.5	603.4	576.4	549.4
122.5°	705.6	707.0	708.4	706.5	701.3	696.1	690.8	685.6
125°	763.8	765.3	766.7	767.6	768.3	768.8	769.4	770.1
127.5°	817.7	819.7	821.8	822.8	823.0	823.1	823.2	823.3
130°	851.9	854.1	856.3	857.3	857.1	856.9	856.7	856.5
132.5°	885.1	887.0	888.9	889.8	889.5	889.3	889.1	888.9
135°	932.6	934.5	936.5	937.4	937.0	936.5	936.1	935.8
137.5°	976.6	978.5	980.5	981.2	980.5	979.8	979.1	978.5
140°	1005.1	1006.9	1008.7	1009.1	1008.1	1007.1	1006.1	1005.1
142.5°	1031.4	1033.1	1034.7	1035.0	1034.1	1033.0	1032.1	1031.0
145°	1068.3	1069.7	1071.0	1071.3	1070.3	1069.2	1068.3	1067.2
147.5°	1100.3	1101.4	1102.4	1102.5	1101.6	1100.8	1099.9	1099.1
150°	1120.1	1121.2	1122.5	1122.6	1121.6	1120.6	1119.6	1118.6
152.5°	1138.1	1139.3	1140.5	1140.5	1139.2	1137.8	1136.5	1135.2
155°	1162.4	1163.6	1164.8	1164.6	1163.0	1161.4	1159.8	1158.2
157.5°	1182.9	1184.3	1185.6	1185.5	1183.9	1182.4	1180.8	1179.3
160°	1194.9	1196.0	1197.2	1197.1	1195.7	1194.3	1193.0	1191.6
162.5°	1206.0	1207.3	1208.7	1208.5	1206.7	1205.0	1203.3	1201.6
165°	1219.6	1221.0	1222.4	1222.4	1221.0	1219.6	1218.1	1216.7
167.5°	1230.9	1232.3	1233.7	1233.5	1231.7	1229.9	1228.1	1226.3
170°	1236.7	1238.0	1239.4	1239.3	1237.5	1235.7	1233.9	1232.1
172.5°	1241.0	1242.4	1243.8	1243.6	1241.8	1240.0	1238.2	1236.4
175°	1245.7	1247.1	1248.5	1248.2	1246.1	1244.2	1242.2	1240.2
177.5°	1246.2	1247.3	1248.4	1248.3	1246.8	1245.4	1244.0	1242.6
180°	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6	1244.6

(END OF REPORT)