

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331832-830

Luminaire Tested: **S122RDIW-S865D710U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331832-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S865D710U830-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 710 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5163.3 lumens  
Efficiency: N/A  
Efficacy: 96.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 53.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331832-830

CATALOG NUMBER: S122RDIW-S865D710U830-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

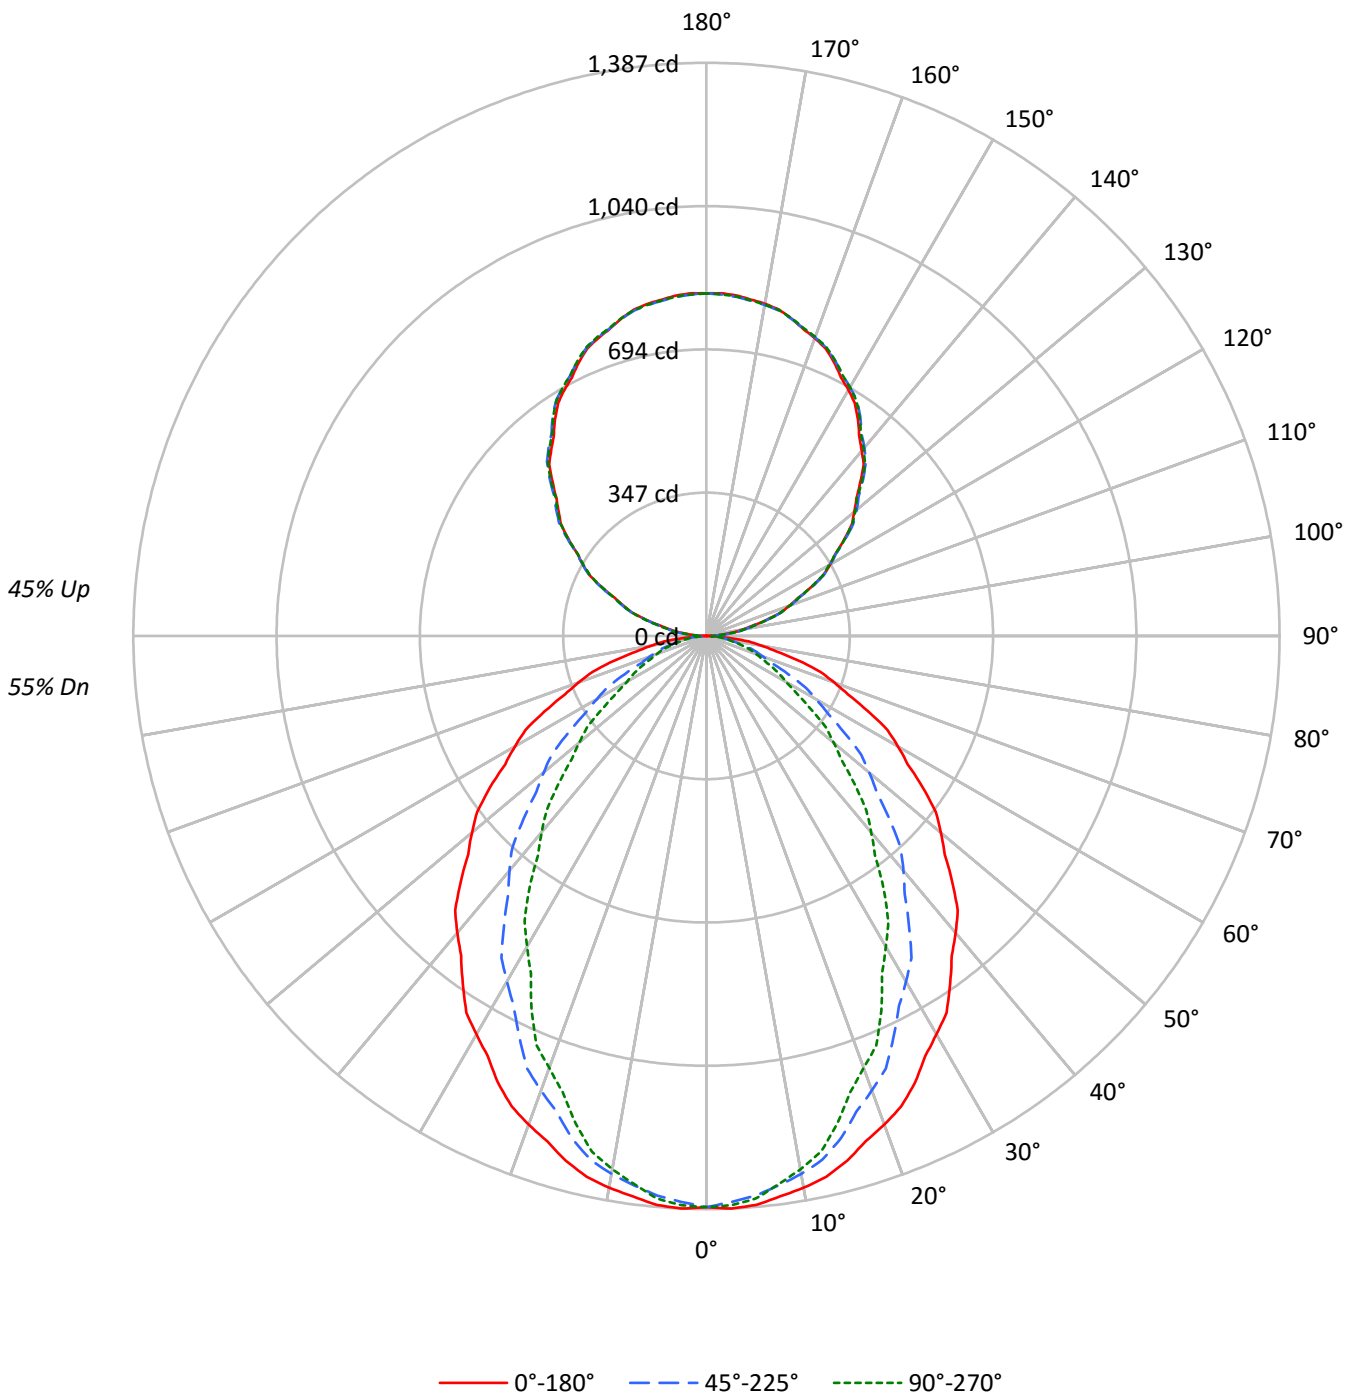



TEST NUMBER: P331832-830

CATALOG NUMBER: S122RDIW-S865D710U830-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	92	88	92	89	85	83	76	74	72	65	63	62	55	53	52	47
2	91	84	78	73	84	78	73	69	68	64	60	58	55	52	49	47	45	41
3	83	74	67	61	77	69	63	58	60	55	51	52	48	45	44	41	39	35
4	77	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	31
5	70	59	51	45	65	55	48	43	48	43	39	42	38	34	36	32	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	34	30	33	29	27	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	21
8	56	44	36	31	52	41	35	30	37	31	27	32	27	24	28	24	22	19
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	26	22	20	18
10	49	37	30	25	46	35	29	24	31	26	22	27	23	20	24	20	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	22315	22315	22315
5°	22400	22034	22156
10°	22228	21674	21489
15°	21972	21031	20425
20°	21618	20113	19105
25°	21257	19073	17826
30°	20752	18000	16183
35°	20262	16837	14741
40°	19770	15633	13076
45°	19192	14280	11565
50°	18600	12913	10083
55°	17990	11443	8659
60°	17286	9894	7188
65°	16485	8313	6548
70°	15526	6850	6019
75°	14361	6245	5614
80°	12673	5579	5114
85°	9967	4409	4409



TEST NUMBER: P331832-830

CATALOG NUMBER: S122RDIW-S865D710U830-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	129.4	2.5
10°-20°	355.2	6.9
20°-30°	498.8	9.7
30°-40°	543.9	10.5
40°-50°	500.1	9.7
50°-60°	392.8	7.6
60°-70°	256.1	5.0
70°-80°	132.0	2.6
80°-90°	37.6	0.7
90°-100°	52.5	1.0
100°-110°	163.1	3.2
110°-120°	278.8	5.4
120°-130°	366.6	7.1
130°-140°	411.5	8.0
140°-150°	403.5	7.8
150°-160°	338.4	6.6
160°-170°	224.5	4.3
170°-180°	78.5	1.5
0°-30°	983.3	19.0
0°-40°	1527.2	29.6
0°-60°	2420.1	46.9
0°-90°	2845.8	55.1
90°-120°	494.4	9.6
90°-150°	1676.1	32.5
90°-180°	2317.0	44.9
0°-180°	5163.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1382	1382	1382	1382	1382	
5°	1382	1375	1360	1370	1367	131
15°	1314	1299	1258	1235	1222	370
25°	1193	1151	1071	1021	1001	548
35°	1028	962	854	778	748	643
45°	840	754	625	540	506	649
55°	639	539	406	334	308	571
65°	432	330	218	177	171	428
75°	230	145	100	92	90	244
85°	54	29	24	24	24	63
90°	1	10	24	23	24	4
95°	36	43	45	45	43	42
105°	150	152	154	155	155	159
115°	280	284	283	282	280	277
125°	407	413	411	409	408	364
135°	527	534	536	535	533	407
145°	639	644	648	649	646	399
155°	731	733	735	738	736	336
165°	795	795	795	799	796	224
175°	827	825	824	828	825	79
180°	829	829	829	829	829	



TEST NUMBER: P331832-830

CATALOG NUMBER: S122RDIW-S865D710U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1
2.5°	1387.0	1385.9	1384.8	1383.7	1382.6	1380.8	1378.4	1375.9	1373.5	1371.0	1373.3
5°	1382.1	1380.6	1379.2	1377.8	1376.5	1373.9	1370.4	1366.8	1363.1	1359.5	1362.0
7.5°	1367.7	1366.0	1364.3	1362.6	1360.8	1357.9	1353.7	1349.4	1345.2	1341.0	1341.7
10°	1355.8	1353.8	1351.9	1349.9	1347.9	1344.3	1338.7	1333.1	1327.6	1322.0	1321.2
12.5°	1340.8	1338.3	1336.0	1333.6	1331.2	1326.4	1319.3	1312.2	1305.0	1298.0	1296.5
15°	1314.5	1311.5	1308.3	1305.3	1302.2	1296.0	1286.6	1277.1	1267.6	1258.2	1252.9
17.5°	1282.2	1277.5	1272.9	1268.2	1263.6	1255.2	1243.0	1230.9	1218.8	1206.6	1200.4
20°	1258.2	1252.6	1247.1	1241.5	1236.0	1226.2	1212.3	1198.4	1184.6	1170.6	1163.7
22.5°	1232.2	1226.0	1219.7	1213.5	1207.3	1196.4	1180.6	1165.0	1149.3	1133.6	1124.6
25°	1193.2	1184.3	1175.4	1166.5	1157.6	1144.0	1125.6	1107.3	1088.9	1070.6	1059.2
27.5°	1146.1	1136.4	1126.8	1117.1	1107.5	1092.3	1071.6	1050.9	1030.2	1009.6	996.3
30°	1113.1	1102.6	1092.0	1081.5	1070.9	1054.5	1032.3	1010.0	987.8	965.5	951.4
32.5°	1081.1	1068.7	1056.4	1044.1	1031.7	1014.3	991.6	968.8	946.2	923.5	907.4
35°	1028.0	1013.9	999.8	985.5	971.4	952.1	927.6	903.1	878.7	854.2	836.7
37.5°	975.1	959.5	944.0	928.3	912.8	891.9	865.9	839.8	813.8	787.7	768.4
40°	938.0	921.3	904.7	888.0	871.3	849.5	822.6	795.6	768.6	741.7	721.9
42.5°	900.0	882.4	864.9	847.3	829.7	807.0	779.2	751.3	723.5	695.6	675.2
45°	840.5	821.8	803.2	784.6	766.0	742.1	712.9	683.7	654.5	625.4	605.6
47.5°	782.4	762.7	743.0	723.2	703.5	678.5	648.5	618.3	588.1	558.1	538.5
50°	740.5	720.7	701.0	681.2	661.5	636.3	605.8	575.1	544.6	514.1	494.8
52.5°	699.4	678.7	658.2	637.5	616.9	591.6	561.8	531.8	501.9	472.0	453.5
55°	639.1	617.5	595.8	574.1	552.4	526.5	496.5	466.5	436.5	406.5	389.8
57.5°	577.3	555.1	532.8	510.6	488.4	462.9	433.9	405.1	376.3	347.4	332.2
60°	535.3	513.0	490.9	468.6	446.4	420.9	392.3	363.6	335.1	306.4	292.3
62.5°	494.3	472.0	449.8	427.5	405.3	380.6	353.3	326.0	298.7	271.4	257.9
65°	431.5	409.0	386.4	363.9	341.5	317.6	292.7	267.7	242.6	217.6	208.2
67.5°	371.0	348.6	326.3	303.9	281.5	259.1	236.7	214.1	191.6	169.1	164.8
70°	328.9	307.3	285.6	263.9	242.2	221.8	202.6	183.4	164.3	145.1	142.3
72.5°	288.9	268.2	247.3	226.6	205.8	187.7	172.3	156.8	141.5	126.1	123.8
75°	230.2	210.7	191.2	171.7	152.3	137.9	128.4	118.9	109.5	100.1	98.1
77.5°	172.4	155.2	138.2	121.1	104.1	93.3	88.7	84.2	79.6	75.0	73.9
80°	136.3	122.2	108.0	93.8	79.6	71.2	68.3	65.6	62.8	60.0	58.9
82.5°	103.3	92.3	81.2	70.1	59.1	52.6	50.7	48.8	46.9	45.1	44.4
85°	53.8	48.0	42.1	36.3	30.4	27.1	26.3	25.4	24.6	23.8	23.8
87.5°	16.1	14.7	13.4	12.0	10.6	10.2	10.8	11.5	12.3	12.9	12.6
90°	0.7	2.5	4.4	6.3	8.2	10.8	14.2	17.6	21.0	24.5	24.1
92.5°	12.4	13.9	15.2	16.6	17.9	19.0	19.8	20.6	21.4	22.2	22.3
95°	36.4	37.9	39.5	41.0	42.6	43.5	43.8	44.1	44.5	44.8	44.8
97.5°	66.4	67.8	69.2	70.5	71.9	72.9	73.5	74.1	74.6	75.2	75.2
100°	88.8	90.1	91.3	92.6	93.8	94.6	95.1	95.6	96.0	96.5	96.5
102.5°	112.4	113.3	114.3	115.3	116.3	117.1	117.7	118.3	118.9	119.4	119.6
105°	150.3	150.8	151.3	151.7	152.2	152.6	153.0	153.3	153.5	153.9	154.2
107.5°	188.7	189.4	190.1	190.8	191.4	191.8	191.8	191.8	191.8	191.8	191.9
110°	213.3	214.2	215.2	216.1	217.1	217.5	217.5	217.5	217.5	217.5	217.5



TEST NUMBER: P331832-830

CATALOG NUMBER: S122RDIW-S865D710U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	240.2	241.1	242.0	243.0	243.9	244.3	244.2	244.0	243.9	243.8	243.5
115°	279.7	280.7	281.6	282.6	283.5	283.8	283.5	283.1	282.9	282.6	282.4
117.5°	319.2	320.5	321.7	322.9	324.1	324.3	323.5	322.6	321.8	320.9	320.6
120°	345.5	346.8	348.0	349.2	350.4	350.4	349.2	348.0	346.8	345.5	345.5
122.5°	369.6	371.1	372.6	374.0	375.5	375.9	374.9	374.1	373.2	372.4	372.0
125°	407.1	408.5	409.8	411.2	412.6	413.1	412.6	412.2	411.7	411.2	410.8
127.5°	443.6	445.4	447.1	448.8	450.6	451.3	450.7	450.2	449.6	449.0	448.5
130°	466.5	468.5	470.5	472.6	474.6	475.4	475.1	474.9	474.5	474.2	473.9
132.5°	492.3	493.9	495.6	497.2	498.8	499.7	499.7	499.8	499.9	499.9	499.3
135°	526.7	528.4	530.1	531.8	533.5	534.5	534.8	535.2	535.5	535.7	535.6
137.5°	562.9	564.3	565.7	567.1	568.4	569.4	569.8	570.2	570.6	571.0	570.9
140°	584.8	586.1	587.5	588.9	590.3	591.4	592.2	593.0	593.7	594.5	594.5
142.5°	607.1	608.5	609.9	611.3	612.7	613.7	614.2	614.7	615.2	615.8	615.9
145°	639.2	640.4	641.4	642.5	643.7	644.6	645.5	646.5	647.4	648.4	648.5
147.5°	668.0	669.2	670.5	671.8	673.2	674.1	674.8	675.3	676.0	676.7	676.9
150°	687.5	688.4	689.4	690.3	691.3	692.0	692.7	693.2	693.9	694.6	695.0
152.5°	704.8	705.8	706.7	707.7	708.6	709.5	710.2	711.0	711.7	712.5	713.0
155°	730.8	731.3	731.8	732.3	732.7	733.2	733.7	734.1	734.6	735.1	735.8
157.5°	753.1	753.5	753.8	754.0	754.4	754.7	755.0	755.3	755.5	755.8	756.9
160°	766.6	766.9	767.1	767.5	767.8	768.1	768.2	768.4	768.5	768.6	769.6
162.5°	778.8	778.9	779.0	779.0	779.1	779.2	779.4	779.6	779.7	779.9	780.9
165°	795.2	795.0	794.9	794.8	794.7	794.6	794.6	794.6	794.6	794.6	795.6
167.5°	809.0	808.5	808.0	807.6	807.1	806.8	806.8	806.7	806.7	806.7	807.8
170°	816.2	815.8	815.3	814.8	814.4	814.1	813.9	813.7	813.6	813.4	814.5
172.5°	821.2	820.8	820.3	819.8	819.4	819.1	818.9	818.8	818.6	818.4	819.5
175°	827.4	827.0	826.5	826.0	825.6	825.2	824.8	824.5	824.3	823.9	825.0
177.5°	829.9	829.5	829.2	828.8	828.4	828.1	827.8	827.6	827.4	827.1	827.8
180°	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8



TEST NUMBER: P331832-830

CATALOG NUMBER: S122RDIW-S865D710U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1
2.5°	1375.5	1377.7	1379.9	1380.8	1380.4	1379.9	1379.5	1379.0
5°	1364.5	1367.0	1369.5	1370.4	1369.5	1368.7	1367.8	1367.0
7.5°	1342.5	1343.1	1343.9	1343.5	1342.1	1340.7	1339.2	1337.8
10°	1320.3	1319.5	1318.6	1317.4	1315.7	1314.1	1312.4	1310.7
12.5°	1295.0	1293.5	1291.9	1289.9	1287.0	1284.3	1281.5	1278.7
15°	1247.6	1242.4	1237.1	1233.0	1230.3	1227.5	1224.7	1221.9
17.5°	1194.1	1187.8	1181.6	1176.0	1171.2	1166.5	1161.7	1156.9
20°	1156.8	1149.8	1142.8	1136.3	1130.2	1124.1	1117.9	1111.9
22.5°	1115.8	1106.8	1097.9	1091.1	1086.6	1081.9	1077.4	1072.9
25°	1047.8	1036.4	1025.0	1017.2	1013.0	1008.9	1004.8	1000.6
27.5°	983.0	969.7	956.4	946.5	939.9	933.2	926.6	920.0
30°	937.2	923.0	908.8	898.0	890.5	883.0	875.5	868.0
32.5°	891.2	875.0	858.8	847.2	840.2	833.1	826.0	819.0
35°	819.2	801.7	784.2	772.4	766.3	760.2	754.0	747.9
37.5°	749.1	729.8	710.6	697.4	690.4	683.3	676.4	669.4
40°	702.2	682.5	662.7	649.2	642.1	634.8	627.5	620.4
42.5°	654.9	634.4	614.1	600.3	593.3	586.4	579.3	572.3
45°	585.9	566.2	546.4	533.2	526.5	519.9	513.2	506.5
47.5°	518.8	499.2	479.6	466.7	460.7	454.6	448.6	442.5
50°	475.7	456.5	437.3	424.8	419.0	413.1	407.3	401.4
52.5°	435.0	416.5	397.9	386.1	380.6	375.2	369.9	364.5
55°	373.2	356.5	339.8	328.8	323.5	318.2	312.9	307.6
57.5°	316.9	301.6	286.3	276.4	272.0	267.5	263.1	258.6
60°	278.1	263.9	249.7	240.4	235.9	231.5	227.1	222.6
62.5°	244.4	230.9	217.4	209.2	206.6	204.0	201.2	198.6
65°	198.7	189.3	179.8	174.7	173.8	173.1	172.2	171.4
67.5°	160.4	156.1	151.7	149.1	148.3	147.3	146.5	145.6
70°	139.5	136.8	133.9	132.1	130.9	129.8	128.7	127.5
72.5°	121.4	119.0	116.7	115.3	114.5	113.9	113.2	112.5
75°	96.1	94.3	92.3	91.1	90.9	90.6	90.3	90.0
77.5°	72.9	71.7	70.6	69.8	69.4	68.9	68.5	68.1
80°	57.8	56.7	55.6	55.0	55.0	55.0	55.0	55.0
82.5°	43.7	43.0	42.3	42.0	42.0	42.0	42.0	42.0
85°	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.8
87.5°	12.3	12.1	11.8	11.6	11.7	11.7	11.7	11.8
90°	23.8	23.6	23.3	23.2	23.3	23.5	23.7	23.8
92.5°	22.3	22.4	22.5	22.5	22.5	22.6	22.6	22.6
95°	44.8	44.8	44.8	44.6	44.3	44.0	43.6	43.4
97.5°	75.2	75.2	75.2	75.2	75.2	75.2	75.1	75.1
100°	96.5	96.5	96.5	96.4	96.3	96.1	96.0	95.9
102.5°	119.7	119.8	120.0	120.0	119.8	119.6	119.5	119.3
105°	154.5	154.8	155.1	155.2	155.2	155.2	155.2	155.2
107.5°	192.0	192.2	192.3	192.0	191.2	190.6	189.8	189.2
110°	217.5	217.5	217.5	217.3	216.8	216.3	215.8	215.5





TEST NUMBER: P331832-830

CATALOG NUMBER: S122RDIW-S865D710U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	243.1	242.7	242.3	242.0	241.7	241.3	240.9	240.6
115°	282.3	282.1	281.9	281.6	281.2	280.7	280.2	279.7
117.5°	320.2	319.8	319.4	319.0	318.5	318.0	317.5	317.1
120°	345.5	345.5	345.5	345.3	344.8	344.3	343.8	343.4
122.5°	371.6	371.3	370.9	370.5	370.1	369.9	369.5	369.2
125°	410.3	409.8	409.3	409.1	409.0	408.8	408.6	408.5
127.5°	447.9	447.3	446.8	446.3	445.7	445.3	444.8	444.3
130°	473.6	473.3	473.0	472.5	471.8	471.3	470.6	470.0
132.5°	498.6	497.9	497.2	496.6	496.2	495.6	495.1	494.6
135°	535.5	535.3	535.2	534.8	534.3	533.9	533.4	532.9
137.5°	570.7	570.6	570.5	570.1	569.5	568.9	568.3	567.6
140°	594.5	594.5	594.5	594.2	593.6	593.0	592.3	591.7
142.5°	616.0	616.1	616.2	616.0	615.4	614.7	614.2	613.5
145°	648.7	648.8	648.9	648.8	648.1	647.5	646.9	646.3
147.5°	677.3	677.6	678.0	677.9	677.3	676.7	676.1	675.5
150°	695.4	695.9	696.4	696.4	695.9	695.4	695.0	694.6
152.5°	713.6	714.2	714.8	714.8	714.2	713.6	713.0	712.5
155°	736.6	737.4	738.2	738.4	737.9	737.4	737.0	736.5
157.5°	757.9	758.9	760.0	760.2	759.4	758.7	757.9	757.1
160°	770.5	771.5	772.4	772.5	771.9	771.3	770.7	770.1
162.5°	781.9	783.1	784.1	784.2	783.4	782.8	782.0	781.3
165°	796.7	797.8	798.9	799.1	798.2	797.5	796.7	796.0
167.5°	808.9	809.9	811.1	811.2	810.4	809.5	808.8	807.9
170°	815.6	816.7	817.7	817.8	816.9	816.0	815.0	814.1
172.5°	820.7	821.7	822.8	822.8	822.0	821.0	820.1	819.2
175°	826.0	827.2	828.3	828.3	827.4	826.5	825.6	824.6
177.5°	828.6	829.3	830.1	830.1	829.3	828.6	827.8	827.1
180°	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8

(END OF REPORT)