

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331607-930

Luminaire Tested: **S122DIW-S1005D1240U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331607-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIW-S1005D1240U930-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1240 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7348.5 lumens  
Efficiency: N/A  
Efficacy: 96.4 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 76.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331607-930

CATALOG NUMBER: S122DIW-S1005D1240U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

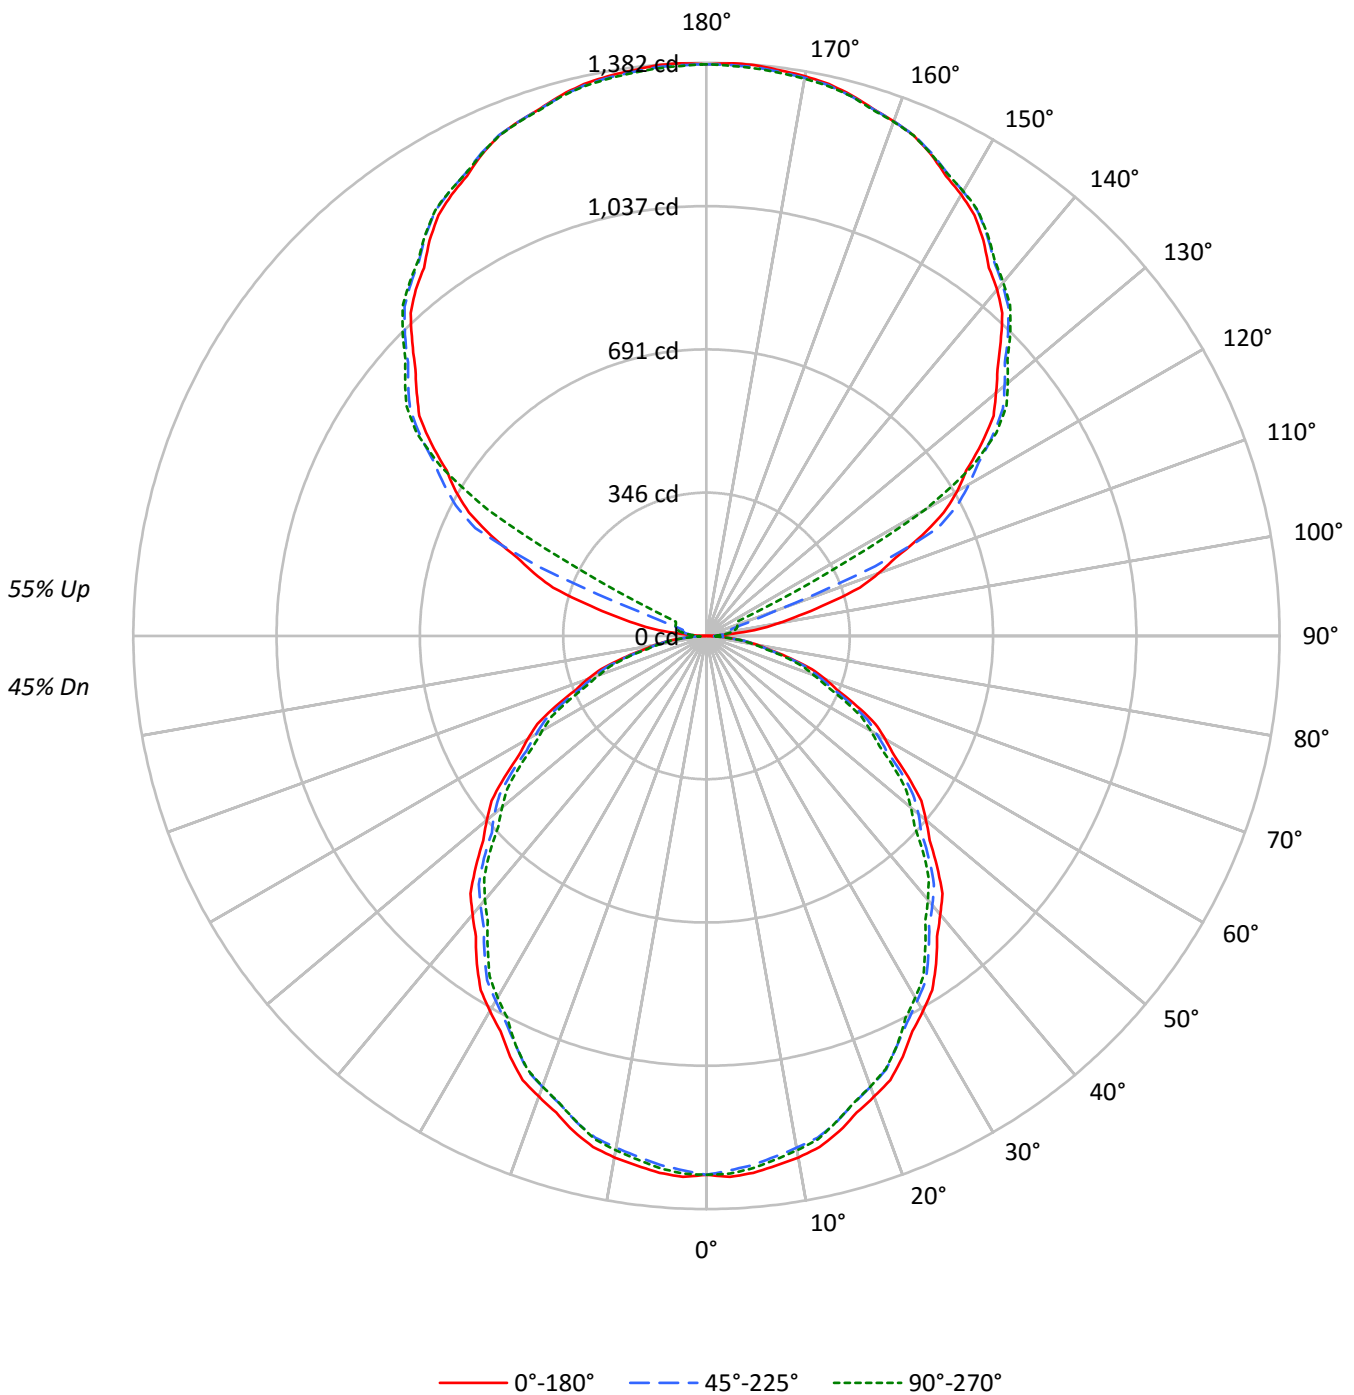



TEST NUMBER: P331607-930

CATALOG NUMBER: S122DIW-S1005D1240U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	65	65	65	52	52	52
1	97	92	88	85	88	85	81	79	71	68	66	58	56	54	46	44	44
2	88	81	75	69	80	74	69	64	62	58	55	51	48	45	40	38	37
3	80	71	64	58	73	65	59	54	55	50	46	45	41	38	36	33	31
4	73	63	55	49	67	58	51	46	48	43	39	40	36	33	32	29	27
5	67	56	48	42	61	52	44	39	43	38	34	36	32	29	29	26	23
6	62	50	42	36	57	46	39	34	39	34	29	32	28	25	26	23	21
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16
9	49	37	30	25	45	35	28	23	30	24	21	25	21	18	20	17	15
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	20980	20980	20980
5°	21060	20757	20879
10°	20935	20546	20649
15°	20677	20279	20259
20°	20309	19880	19859
25°	19946	19388	19388
30°	19475	18938	18776
35°	19036	18398	18126
40°	18487	17856	17513
45°	17945	17317	16890
50°	17357	16759	16164
55°	16743	16110	15510
60°	16059	15332	14767
65°	15320	14560	13891
70°	14389	13624	12977
75°	13094	12545	12239
80°	11623	11269	10693
85°	9485	9040	8096



TEST NUMBER: P331607-930

CATALOG NUMBER: S122DIW-S1005D1240U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	122.2	1.7
10°-20°	343.8	4.7
20°-30°	505.4	6.9
30°-40°	587.0	8.0
40°-50°	586.4	8.0
50°-60°	511.4	7.0
60°-70°	378.1	5.1
70°-80°	214.2	2.9
80°-90°	61.0	0.8
90°-100°	46.0	0.6
100°-110°	168.6	2.3
110°-120°	450.7	6.1
120°-130°	744.0	10.1
130°-140°	791.2	10.8
140°-150°	735.4	10.0
150°-160°	591.2	8.0
160°-170°	381.0	5.2
170°-180°	131.1	1.8
0°-30°	971.4	13.2
0°-40°	1558.4	21.2
0°-60°	2656.1	36.1
0°-90°	3309.4	45.0
90°-120°	665.3	9.1
90°-150°	2935.8	40.0
90°-180°	4039.0	55.0
0°-180°	7348.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1299	1299	1299	1299	1299	
5°	1299	1294	1281	1290	1288	123
15°	1237	1229	1213	1218	1212	348
25°	1120	1109	1088	1090	1088	515
35°	966	953	933	926	920	603
45°	786	777	758	745	740	606
55°	595	587	572	558	551	532
65°	401	393	381	370	364	397
75°	210	207	201	194	196	224
85°	51	50	49	45	44	59
90°	1	12	20	25	27	6
95°	65	34	39	44	43	79
105°	303	316	61	71	76	324
115°	574	591	615	175	82	564
125°	811	824	843	850	853	723
135°	1003	1019	1028	1038	1036	775
145°	1164	1164	1180	1186	1182	728
155°	1282	1274	1285	1290	1282	590
165°	1350	1345	1347	1354	1347	381
175°	1381	1375	1376	1382	1373	131
180°	1378	1378	1378	1378	1378	



TEST NUMBER: P331607-930

CATALOG NUMBER: S122DIW-S1005D1240U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4
2.5°	1305.5	1304.3	1303.3	1302.1	1301.0	1299.3	1296.8	1294.4	1291.9	1289.5	1291.7
5°	1299.4	1298.4	1297.2	1296.1	1295.0	1292.9	1289.9	1286.8	1283.8	1280.7	1283.0
7.5°	1287.9	1286.2	1284.5	1282.8	1281.1	1278.6	1275.5	1272.4	1269.3	1266.2	1268.4
10°	1276.9	1275.0	1273.1	1271.1	1269.2	1266.6	1263.2	1259.9	1256.5	1253.2	1255.5
12.5°	1262.0	1260.2	1258.5	1256.8	1255.1	1252.5	1249.2	1245.9	1242.6	1239.3	1240.8
15°	1237.0	1235.3	1233.6	1232.0	1230.3	1227.7	1224.1	1220.4	1216.8	1213.2	1214.4
17.5°	1205.0	1203.3	1201.7	1200.0	1198.3	1195.6	1192.0	1188.3	1184.6	1181.0	1182.3
20°	1182.0	1180.3	1178.7	1177.0	1175.3	1172.6	1168.7	1164.8	1160.9	1157.0	1157.8
22.5°	1159.0	1156.7	1154.4	1152.0	1149.7	1146.7	1143.0	1139.4	1135.7	1132.0	1132.2
25°	1119.6	1117.3	1115.1	1112.9	1110.7	1107.2	1102.4	1097.7	1093.0	1088.3	1088.8
27.5°	1074.6	1072.5	1070.6	1068.5	1066.6	1063.7	1060.0	1056.2	1052.6	1048.8	1048.0
30°	1044.6	1042.4	1040.1	1037.9	1035.7	1032.5	1028.3	1024.2	1020.0	1015.8	1015.0
32.5°	1012.6	1010.8	1009.0	1007.2	1005.4	1002.4	998.0	993.6	989.2	984.8	983.3
35°	965.8	963.0	960.3	957.5	954.7	951.1	946.6	942.2	937.8	933.4	931.7
37.5°	913.1	910.7	908.2	905.8	903.4	899.9	895.4	891.0	886.6	882.2	880.0
40°	877.1	874.9	872.7	870.5	868.2	865.0	860.5	856.1	851.6	847.2	844.7
42.5°	842.1	839.9	837.7	835.5	833.2	829.9	825.5	821.0	816.6	812.1	809.4
45°	785.9	784.0	782.0	780.1	778.1	775.1	770.9	766.8	762.6	758.4	755.4
47.5°	729.9	728.1	726.3	724.5	722.6	719.5	715.2	710.9	706.5	702.2	699.0
50°	691.0	689.6	688.2	686.8	685.4	682.7	678.9	675.0	671.1	667.2	663.3
52.5°	653.0	651.2	649.3	647.5	645.6	642.9	639.2	635.5	631.9	628.3	625.0
55°	594.8	593.0	591.4	589.8	588.1	585.5	582.3	578.9	575.6	572.3	568.9
57.5°	536.3	534.9	533.6	532.3	530.9	528.5	524.8	521.1	517.5	513.8	510.5
60°	497.3	496.2	495.0	494.0	492.8	490.3	486.5	482.6	478.7	474.8	471.7
62.5°	459.3	457.5	455.8	454.0	452.2	449.8	446.8	443.8	440.8	437.8	435.0
65°	401.0	399.4	397.8	396.1	394.4	392.2	389.4	386.6	383.8	381.1	378.6
67.5°	341.9	340.6	339.2	337.9	336.6	334.6	332.1	329.6	327.1	324.7	322.7
70°	304.8	303.8	302.6	301.6	300.4	298.6	296.1	293.6	291.1	288.6	286.7
72.5°	266.8	265.8	264.6	263.6	262.4	261.1	259.5	257.9	256.2	254.6	252.7
75°	209.9	209.4	208.8	208.2	207.7	206.7	205.3	203.9	202.5	201.1	199.5
77.5°	158.9	158.0	157.0	156.1	155.2	154.4	153.8	153.3	152.7	152.2	151.3
80°	125.0	124.7	124.4	124.1	123.8	123.4	122.9	122.3	121.7	121.2	120.3
82.5°	92.9	92.9	92.9	92.8	92.7	92.5	92.2	91.9	91.6	91.2	90.2
85°	51.2	51.0	50.7	50.4	50.1	49.8	49.6	49.2	49.0	48.8	47.9
87.5°	18.2	18.3	18.3	18.3	18.3	18.3	18.3	18.2	18.1	18.0	17.5
90°	1.0	3.4	5.9	8.3	10.8	12.9	14.6	16.4	18.2	20.0	21.0
92.5°	20.1	19.9	19.7	19.5	19.2	19.6	20.5	21.4	22.3	23.2	23.7
95°	64.8	57.5	50.2	42.9	35.5	32.7	34.2	35.8	37.3	38.9	40.0
97.5°	128.7	108.0	87.4	66.9	46.2	37.7	41.3	44.8	48.5	52.1	52.9
100°	176.5	146.2	115.8	85.4	55.1	41.7	45.6	49.3	53.1	56.8	58.6
102.5°	229.2	222.7	216.3	209.9	203.5	184.5	153.0	121.5	89.9	58.5	60.7
105°	303.2	309.8	316.5	323.1	329.8	302.9	242.4	181.8	121.3	60.8	63.3
107.5°	387.6	392.9	398.3	403.7	409.0	375.4	302.9	230.3	157.8	85.2	82.7
110°	441.8	446.5	451.1	455.8	460.4	430.7	366.7	302.6	238.6	174.6	152.4



TEST NUMBER: P331607-930

CATALOG NUMBER: S122DIW-S1005D1240U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	492.8	497.0	501.1	505.2	509.4	503.5	487.7	471.9	456.1	440.2	359.4
115°	573.5	577.2	581.0	584.7	588.6	593.2	598.8	604.3	609.8	615.4	512.7
117.5°	645.5	649.7	653.9	658.1	662.3	666.3	670.1	673.9	677.8	681.6	656.7
120°	698.1	701.5	704.7	708.1	711.4	715.1	719.1	723.1	727.1	731.0	733.7
122.5°	742.8	746.3	749.8	753.3	756.8	760.8	765.1	769.4	773.8	778.1	779.7
125°	810.8	813.7	816.6	819.5	822.3	825.9	830.1	834.3	838.5	842.8	844.3
127.5°	872.5	875.6	878.8	882.1	885.3	888.4	891.5	894.7	897.8	901.0	903.3
130°	911.6	915.1	918.7	922.2	925.8	928.7	931.2	933.6	936.0	938.5	940.9
132.5°	951.5	954.5	957.5	960.5	963.5	966.2	968.7	971.1	973.5	976.0	978.0
135°	1003.3	1006.8	1010.4	1013.9	1017.5	1020.3	1022.2	1024.3	1026.2	1028.3	1030.5
137.5°	1055.7	1058.3	1060.7	1063.2	1065.7	1068.0	1070.3	1072.6	1074.8	1077.1	1079.3
140°	1090.1	1091.8	1093.6	1095.4	1097.1	1099.3	1101.7	1104.2	1106.6	1109.1	1111.0
142.5°	1118.8	1120.4	1122.0	1123.6	1125.2	1127.4	1130.2	1132.9	1135.7	1138.6	1140.4
145°	1163.8	1163.7	1163.4	1163.2	1163.0	1164.7	1168.6	1172.3	1176.1	1179.8	1181.4
147.5°	1203.1	1202.3	1201.5	1200.6	1199.8	1201.3	1204.9	1208.7	1212.4	1216.1	1217.3
150°	1228.7	1227.2	1225.6	1224.0	1222.5	1223.5	1227.0	1230.6	1234.1	1237.7	1239.0
152.5°	1250.3	1248.5	1246.8	1245.0	1243.3	1244.1	1247.5	1250.9	1254.3	1257.6	1259.0
155°	1281.6	1279.5	1277.6	1275.5	1273.6	1273.9	1276.6	1279.2	1281.9	1284.6	1285.9
157.5°	1306.1	1304.4	1302.7	1301.1	1299.3	1299.4	1301.3	1303.2	1305.0	1306.9	1308.4
160°	1320.5	1319.2	1317.8	1316.5	1315.2	1315.2	1316.5	1317.8	1319.2	1320.5	1321.8
162.5°	1333.3	1331.9	1330.6	1329.3	1327.9	1327.8	1328.9	1330.1	1331.3	1332.4	1333.9
165°	1350.4	1349.1	1347.7	1346.4	1345.1	1344.8	1345.4	1346.1	1346.7	1347.4	1348.9
167.5°	1363.2	1361.8	1360.5	1359.2	1357.8	1357.5	1358.1	1358.7	1359.3	1359.9	1361.5
170°	1370.4	1369.0	1367.7	1366.4	1365.0	1364.6	1365.0	1365.5	1365.9	1366.4	1367.9
172.5°	1375.1	1373.8	1372.5	1371.1	1369.8	1369.4	1369.8	1370.2	1370.7	1371.1	1372.6
175°	1381.3	1379.7	1378.2	1376.6	1375.1	1374.5	1375.0	1375.4	1375.9	1376.3	1377.9
177.5°	1382.3	1381.0	1379.8	1378.6	1377.3	1376.8	1377.0	1377.1	1377.3	1377.5	1378.8
180°	1378.3	1378.3	1378.3	1378.3	1378.3	1378.3	1378.3	1378.3	1378.3	1378.3	1378.3



TEST NUMBER: P331607-930

CATALOG NUMBER: S122DIW-S1005D1240U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4
2.5°	1293.9	1296.1	1298.4	1299.3	1298.8	1298.4	1297.9	1297.5
5°	1285.2	1287.4	1289.6	1290.5	1289.9	1289.3	1288.7	1288.2
7.5°	1270.6	1272.8	1275.1	1275.9	1275.3	1274.7	1274.1	1273.5
10°	1257.7	1259.9	1262.1	1262.8	1262.0	1261.1	1260.3	1259.5
12.5°	1242.4	1243.9	1245.5	1245.9	1245.3	1244.7	1244.1	1243.5
15°	1215.4	1216.6	1217.6	1217.6	1216.2	1214.8	1213.4	1212.0
17.5°	1183.6	1184.9	1186.1	1186.1	1184.7	1183.4	1182.1	1180.7
20°	1158.7	1159.5	1160.3	1160.2	1159.1	1158.0	1156.9	1155.8
22.5°	1132.4	1132.5	1132.7	1132.5	1131.8	1131.1	1130.4	1129.8
25°	1089.4	1090.0	1090.5	1090.5	1090.0	1089.4	1088.8	1088.3
27.5°	1047.2	1046.3	1045.5	1044.4	1043.1	1041.7	1040.4	1039.1
30°	1014.2	1013.3	1012.5	1011.5	1010.4	1009.3	1008.2	1007.1
32.5°	981.9	980.3	978.8	977.5	976.4	975.3	974.2	973.1
35°	930.0	928.4	926.7	925.2	923.8	922.4	921.0	919.6
37.5°	878.0	876.0	873.9	872.2	870.9	869.5	868.2	866.9
40°	842.1	839.7	837.1	835.4	834.2	833.2	832.0	830.9
42.5°	806.7	804.0	801.3	799.2	797.6	796.1	794.5	792.9
45°	752.4	749.3	746.2	744.1	743.0	741.9	740.8	739.7
47.5°	695.8	692.5	689.3	686.9	685.3	683.7	682.1	680.4
50°	659.4	655.6	651.7	649.1	647.7	646.3	644.9	643.5
52.5°	621.8	618.6	615.4	612.9	611.0	609.2	607.3	605.5
55°	565.6	562.2	559.0	556.6	555.2	553.8	552.4	551.0
57.5°	507.2	503.9	500.7	498.5	497.5	496.4	495.4	494.3
60°	468.7	465.6	462.6	460.6	459.8	459.0	458.1	457.3
62.5°	432.2	429.3	426.5	424.5	423.5	422.4	421.3	420.3
65°	376.1	373.6	371.1	369.2	367.8	366.4	365.0	363.6
67.5°	320.7	318.8	316.8	315.3	314.2	313.1	312.0	310.9
70°	284.7	282.8	280.9	279.3	278.2	277.1	276.0	274.9
72.5°	250.8	248.8	246.9	245.5	244.6	243.7	242.8	241.9
75°	197.9	196.2	194.5	194.0	194.5	195.0	195.6	196.2
77.5°	150.5	149.7	148.9	148.1	147.2	146.5	145.7	145.0
80°	119.5	118.7	117.9	117.2	116.6	116.1	115.5	115.0
82.5°	89.1	88.1	87.0	86.4	86.3	86.2	86.1	85.9
85°	47.0	46.2	45.4	44.8	44.6	44.3	44.0	43.7
87.5°	17.1	16.6	16.2	15.9	15.8	15.7	15.5	15.4
90°	22.2	23.2	24.4	25.2	25.6	26.0	26.5	26.9
92.5°	24.3	24.9	25.4	25.8	26.1	26.4	26.7	26.9
95°	41.1	42.2	43.3	43.8	43.5	43.3	43.1	42.9
97.5°	53.8	54.7	55.6	56.2	56.4	56.7	57.0	57.2
100°	60.4	62.1	63.9	65.1	65.5	66.0	66.4	66.9
102.5°	63.0	65.4	67.7	69.1	69.7	70.4	71.0	71.6
105°	65.7	68.2	70.6	72.2	73.1	74.0	74.9	75.8
107.5°	80.2	77.7	75.3	74.4	75.3	76.2	77.1	78.0
110°	130.2	108.0	85.9	75.3	76.1	77.0	77.9	78.8





TEST NUMBER: P331607-930

CATALOG NUMBER: S122DIW-S1005D1240U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	278.5	197.7	116.8	76.7	77.5	78.2	78.8	79.6
115°	410.1	307.5	204.9	145.6	129.6	113.7	97.8	81.8
117.5°	631.9	607.1	582.3	543.6	491.2	438.8	386.4	333.9
120°	736.4	739.0	741.7	728.1	698.1	668.2	638.3	608.4
122.5°	781.3	782.9	784.5	782.4	776.6	770.8	765.0	759.1
125°	845.9	847.4	849.0	850.0	850.7	851.4	852.1	852.7
127.5°	905.5	907.8	910.0	911.3	911.3	911.5	911.6	911.7
130°	943.4	945.8	948.2	949.3	949.1	948.9	948.7	948.4
132.5°	980.2	982.2	984.3	985.2	985.0	984.8	984.6	984.4
135°	1032.7	1034.9	1037.1	1038.0	1037.5	1037.1	1036.7	1036.2
137.5°	1081.4	1083.6	1085.8	1086.5	1085.7	1085.0	1084.3	1083.5
140°	1113.0	1115.0	1117.0	1117.4	1116.3	1115.2	1114.1	1113.0
142.5°	1142.2	1144.0	1145.8	1146.1	1145.1	1143.9	1142.8	1141.7
145°	1182.9	1184.5	1186.0	1186.3	1185.1	1184.1	1182.9	1181.9
147.5°	1218.5	1219.6	1220.7	1220.8	1219.9	1219.0	1218.1	1217.2
150°	1240.3	1241.7	1243.0	1243.1	1242.0	1240.9	1239.7	1238.7
152.5°	1260.3	1261.6	1263.0	1262.9	1261.4	1260.0	1258.5	1257.0
155°	1287.2	1288.6	1289.9	1289.6	1287.8	1286.1	1284.3	1282.5
157.5°	1309.9	1311.4	1313.0	1312.8	1311.1	1309.4	1307.7	1305.9
160°	1323.1	1324.5	1325.8	1325.7	1324.1	1322.6	1321.0	1319.5
162.5°	1335.5	1336.9	1338.5	1338.2	1336.4	1334.4	1332.5	1330.6
165°	1350.5	1352.0	1353.6	1353.6	1352.0	1350.5	1348.9	1347.4
167.5°	1363.0	1364.6	1366.1	1366.0	1363.9	1362.0	1359.9	1358.0
170°	1369.5	1371.0	1372.6	1372.3	1370.4	1368.3	1366.4	1364.3
172.5°	1374.2	1375.7	1377.3	1377.1	1375.1	1373.1	1371.1	1369.1
175°	1379.4	1381.0	1382.5	1382.2	1380.0	1377.8	1375.5	1373.3
177.5°	1380.0	1381.2	1382.5	1382.3	1380.7	1379.1	1377.5	1375.9
180°	1378.3	1378.3	1378.3	1378.3	1378.3	1378.3	1378.3	1378.3

(END OF REPORT)